## Low-Voltage CMOS Octal Buffer

# With 5 V–Tolerant Inputs and Outputs (3–State, Inverting)

The MC74LCX240 is a high performance, inverting octal buffer operating from a 2.3 to 3.6 V supply. High impedance TTL compatible inputs significantly reduce current loading to input drivers while TTL compatible outputs offer improved switching noise performance. A V<sub>I</sub> specification of 5.5 V allows MC74LCX240 inputs to be safely driven from 5 V devices. The MC74LCX240 is suitable for memory address driving and all TTL level bus oriented transceiver applications.

Current drive capability is 24 mA at the outputs. The Output Enable  $(\overline{OE})$  input, when HIGH, disables the outputs by placing them in a HIGH Z condition.


#### Features

- Designed for 2.3 to 3.6 V V<sub>CC</sub> Operation
- 5 V Tolerant Interface Capability With 5 V TTL Logic
- Supports Live Insertion and Withdrawal
- $I_{OFF}$  Specification Guarantees High Impedance When  $V_{CC} = 0 V$
- LVTTL Compatible
- LVCMOS Compatible
- 24 mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current in All Three Logic States (10 μA) Substantially Reduces System Power Requirements
- Latchup Performance Exceeds 500 mA
- ESD Performance:
  - Human Body Model >2000 V
  - Machine Model >200 V
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant



### **ON Semiconductor®**


www.onsemi.com

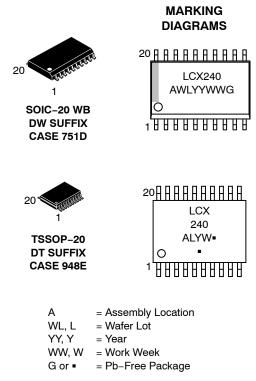


(Note: Microdot may be in either location)

#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 3 of this data sheet.

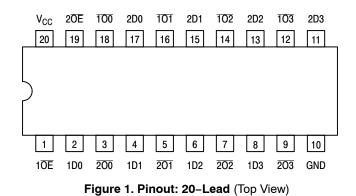






Figure 2. LOGIC DIAGRAM

#### **PIN NAMES**

Pins	Function		
nOE	Output Enable Inputs		
1Dn, 2Dn	Data Inputs		
10n, 20n	3-State Outputs		

#### **TRUTH TABLE**

INPU	UTS	OUTPUTS
10E 20E	1Dn 2Dn	10n, 20n
L	L	н
L	Н	L
Н	Х	Z

High Voltage Level н =

Low Voltage Level L =

High Impedance State =

z x = High or Low Voltage Level and Transitions Are Acceptable; for I<sub>CC</sub> reasons, DO NOT FLOAT Inputs

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
MC74LCX240DTR2G	TSSOP-20 (Pb-Free)	2500 Tape & Reel
MC74LCX240DWR2G	SOIC-20 WB (Pb-Free)	1000 Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### **MAXIMUM RATINGS**

Symbol	Parameter	Value	Condition	Units
V <sub>CC</sub>	DC Supply Voltage	-0.5 to +7.0		V
VI	DC Input Voltage	$-0.5 \le V_{l} \le +7.0$		V
Vo	DC Output Voltage	$-0.5 \le V_0 \le +7.0$	Output in 3-State	V
		$-0.5 \leq V_O \leq V_{CC} + 0.5$	Note 1	V
I <sub>IK</sub>	DC Input Diode Current	-50	V <sub>I</sub> < GND	mA
Ι <sub>ΟΚ</sub>	DC Output Diode Current	-50	V <sub>O</sub> < GND	mA
		+50	$V_{O} > V_{CC}$	mA
Ι <sub>Ο</sub>	DC Output Source/Sink Current	±50		mA
I <sub>CC</sub>	DC Supply Current Per Supply Pin	±100		mA
I <sub>GND</sub>	DC Ground Current Per Ground Pin	±100		mA
T <sub>STG</sub>	Storage Temperature Range	-65 to +150		°C
MSL	Moisture Sensitivity		Level 1	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected. 1. Output in HIGH or LOW State. I<sub>O</sub> absolute maximum rating must be observed.

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Тур	Max	Units
V <sub>CC</sub>	Supply Voltage Operating Data Retention Only	2.0 1.5	3.3 3.3	3.6 3.6	V
VI	Input Voltage	0		5.5	V
V <sub>O</sub>	Output Voltage HIGH or LOW State 3-State	0 0		V <sub>CC</sub> 5.5	V
I <sub>ОН</sub>	HIGH Level Output Current, V <sub>CC</sub> = 3.0 V – 3.6 V			-24	mA
I <sub>OL</sub>	LOW Level Output Current, V <sub>CC</sub> = 3.0 V – 3.6 V			24	mA
I <sub>ОН</sub>	HIGH Level Output Current, V <sub>CC</sub> = 2.7 V – 3.0 V			-12	mA
I <sub>OL</sub>	LOW Level Output Current, V <sub>CC</sub> = 2.7 V - 3.0 V			12	mA
T <sub>A</sub>	Operating Free-Air Temperature	-40		+125	°C
$\Delta t/\Delta V$	Input Transition Rise or Fall Rate, V <sub>IN</sub> from 0.8 V to 2.0 V, V <sub>CC</sub> = 3.0 V	0		10	ns/V

#### DC ELECTRICAL CHARACTERISTICS

			T <sub>A</sub> = -40°C	T <sub>A</sub> = −40°C to +85°C		to +125°C	
Symbol	Characteristic	Condition	Min	Мах	Min	Max	Units
V <sub>IH</sub>	HIGH Level Input Voltage (Note 2)	$2.7~V \leq V_{CC} \leq 3.6~V$	2.0		2.0		V
V <sub>IL</sub>	LOW Level Input Voltage (Note 2)	$2.7~\text{V} \leq \text{V}_{CC} \leq 3.6~\text{V}$		0.8		0.8	V
V <sub>OH</sub>	HIGH Level Output Voltage	2.7 V $\leq$ V <sub>CC</sub> $\leq$ 3.6 V; I <sub>OH</sub> = -100 $\mu A$	V <sub>CC</sub> – 0.2		V <sub>CC</sub> – 0.2		V
		$V_{CC} = 2.7 \text{ V}; \text{ I}_{OH} = -12 \text{ mA}$	2.2		2.2		
		$V_{CC} = 3.0 \text{ V}; \text{ I}_{OH} = -18 \text{ mA}$	2.4		2.4		
		$V_{CC} = 3.0 \text{ V}; \text{ I}_{OH} = -24 \text{ mA}$	2.2		2.2		

2. These values of V<sub>I</sub> are used to test DC electrical characteristics only.

			$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$		T <sub>A</sub> = −40°C	to +125°C	
Symbol	Characteristic	Condition	Min	Max	Min	Max	Units
V <sub>OL</sub>	LOW Level Output Voltage	$2.7~\text{V} \leq \text{V}_{CC} \leq 3.6~\text{V};~\text{I}_{OL}$ = 100 $\mu\text{A}$		0.2		0.2	V
		V <sub>CC</sub> = 2.7 V; I <sub>OL</sub> = 12 mA		0.4		0.4	
		V <sub>CC</sub> = 3.0 V; I <sub>OL</sub> = 16 mA		0.4		0.4	
		V <sub>CC</sub> = 3.0 V; I <sub>OL</sub> = 24 mA		0.55		0.6	
I <sub>OZ</sub>	3-State Output Current	$\label{eq:V_CC} \begin{array}{l} V_{CC} = 3.6 \text{ V},  \text{V}_{\text{IN}} = \text{V}_{\text{IH}} \text{ or } \text{V}_{\text{IL}}, \\ \text{V}_{\text{OUT}} = 0 \text{ to } 5.5 \text{ V} \end{array}$		±5		±5	μΑ
I <sub>OFF</sub>	Power Off Leakage Current	$V_{CC}$ = 0, $V_{IN}$ = 5.5 V or $V_{OUT}$ = 5.5 V		10		10	μΑ
I <sub>IN</sub>	Input Leakage Current	$V_{CC}$ = 3.6 V, $V_{IN}$ = 5.5 V or GND		±5		±5	μA
I <sub>CC</sub>	Quiescent Supply Current	$V_{CC}$ = 3.6 V, $V_{IN}$ = 5.5 V or GND		10		10	μA
$\Delta I_{CC}$	Increase in I <sub>CC</sub> per Input	$2.3 \leq V_{CC} \leq 3.6$ V; $V_{IH}$ = $V_{CC}$ – 0.6 V		500		500	μA

#### **AC CHARACTERISTICS** ( $t_R = t_F = 2.5 \text{ ns}$ ; $C_L = 50 \text{ pF}$ ; $R_L = 500 \Omega$ )

			Limits			
			T <sub>A</sub>	= -40°C to +	125°C	
			V <sub>CC</sub> = 3.0	V to 3.6 V	V <sub>CC</sub> = 2.7 V	
Symbol	Parameter	Waveform	Min	Max	Max	Units
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay Input to Output	1	1.5 1.5	6.5 6.5	7.5 7.5	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output Enable Time to High and Low Level	2	1.5 1.5	8.0 8.0	9.0 9.0	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output Disable Time From High and Low Level	2	1.5 1.5	7.0 7.0	8.0 8.0	ns
t <sub>OSHL</sub> t <sub>OSLH</sub>	Output-to-Output Skew (Note 3)			1.0 1.0		ns

 Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>); parameter guaranteed by design.


#### DYNAMIC SWITCHING CHARACTERISTICS

			T,	<sub>A</sub> = +25°	С	
Symbol	Characteristic	Condition	Min	Тур	Max	Units
V <sub>OLP</sub>	Dynamic LOW Peak Voltage (Note 4)	$V_{CC}$ = 3.3 V, $C_L$ = 50 pF, $V_{IH}$ = 3.3 V, $V_{IL}$ = 0 V		0.8		V
V <sub>OLV</sub>	Dynamic LOW Valley Voltage (Note 4)	$V_{CC}$ = 3.3 V, $C_L$ = 50 pF, $V_{IH}$ = 3.3 V, $V_{IL}$ = 0 V		0.8		V


4. Number of outputs defined as "n". Measured with "n-1" outputs switching from HIGH-to-LOW or LOW-to-HIGH. The remaining output is measured in the LOW state.

#### **CAPACITIVE CHARACTERISTICS**

Symbol	Parameter	Condition	Typical	Units
C <sub>IN</sub>	Input Capacitance	$V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	7	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	10 MHz, $V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	25	pF

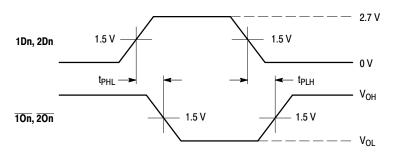


**WAVEFORM 1 - PROPAGATION DELAYS**  $t_{R}$  =  $t_{F}$  = 2.5 ns, 10% to 90%; f = 1 MHz;  $t_{W}$  = 500 ns

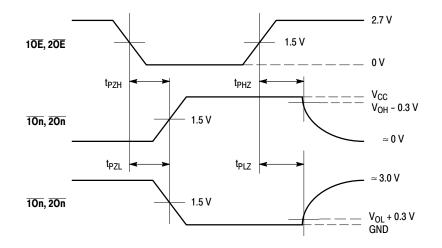

WAVEFORM 2 - OUTPUT ENABLE AND DISABLE TIMES  $t_{B} = t_{F} = 2.5 \text{ ns}, 10\% \text{ to } 90\%; f = 1 \text{ MHz}; t_{W} = 500 \text{ ns}$ 



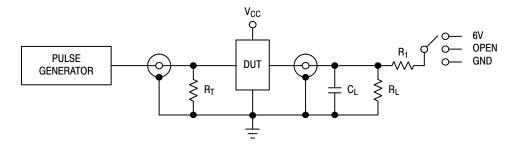

TEST	SWITCH
t <sub>PLH</sub> , t <sub>PHL</sub>	Open
t <sub>PZL</sub> , t <sub>PLZ</sub>	6V
Open Collector/Drain $t_{PLH}$ and $t_{PHL}$	6V
t <sub>PZH</sub> , t <sub>PHZ</sub>	GND

 $C_L$  = 50 pF or equivalent (Includes jig and probe capacitance)  $R_L$  =  $R_1$  = 500  $\Omega$  or equivalent

 $R_T = Z_{OUT}$  of pulse generator (typically 50  $\Omega$ )



т





DOCUMENT NUMBER:	98ASB42343B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOIC-20 WB		PAGE 1 OF 1	
ON Semiconductor and up are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.				





DOCUMENT NUMBER:	98ASH70169A	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	TSSOP-20 WB		PAGE 1 OF 1		

ON Semiconductor and use trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the right or others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcular performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

Email Requests to: orderlit@onsemi.com onsemi Website: www.onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative