# Low-Voltage CMOS Quad 2-Input Multiplexer

# With 5 V–Tolerant Inputs and Outputs (3–State, Inverting)

The MC74LCX258 is a high performance, quad 2–input inverting multiplexer with 3–state outputs operating from a 2.3 to 3.6 V supply. High impedance TTL compatible inputs significantly reduce current loading to input drivers while TTL compatible outputs offer improved switching noise performance. A V<sub>I</sub> specification of 5.5 V allows MC74LCX258 inputs to be safely driven from 5 V devices.

Four bits of data from two sources can be selected using the Select input. The four outputs present the selected data in the inverted form. The outputs may be switched to a high impedance state by placing a logic HIGH on the Output Enable  $(\overline{OE})$  input. Current drive capability is 24 mA at the outputs.


# Features

- Designed for 2.3 to 3.6 V V<sub>CC</sub> Operation
- 5 V Tolerant Interface Capability With 5 V TTL Logic
- Supports Live Insertion and Withdrawal
- $I_{OFF}$  Specification Guarantees High Impedance When  $V_{CC} = 0 V$
- TTL Compatible
- CMOS Compatible
- 24 mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current in all Three Logic States (10 μA) Substantially Reduces System Power Requirements
- Latchup Performance Exceeds 500 mA
- ESD Performance:
  - ◆ Human Body Model >2000 V
  - Machine Model >200 V
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant



# **ON Semiconductor®**

http://onsemi.com



(Note: Microdot may be in either location)

#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 4 of this data sheet.




Figure 1. Pinout: 16-Lead Plastic Package (Top View)

#### **TRUTH TABLE**

Inp	Outputs	
Output Enable	Select	Y0-Y3
Н	Х	Z
L	L	<u>A0</u> – <u>A3</u>
L	Н	<u>B0</u> – <u>B3</u>

X = Don't Care

A0-A3, B0-B3 = The levels of the respective Data-Word Inputs

#### **PIN DESCRIPTIONS**

#### INPUTS

### A0-A3 (Pins 2, 5, 11, 14)

Nibble A inputs. The data present on these pins is transferred to the outputs when the Select input is at a low level and the Output Enable input is at a low level. The data is presented to the outputs in inverted form for the LCX258.

#### B0-B3 (Pins 3, 6, 10, 13)

Nibble B inputs. The data present on these pins is transferred to the outputs when the Select input is at a high level and the Output Enable input is at a low level. The data is presented to the outputs in inverted form for the LCX258.

#### OUTPUTS

#### Y0-Y3 (Pins 4, 7, 9, 12)

Data outputs. The selected input nibble is presented at these outputs when the Output Enable input is at a low level. The data present on these pins is in its inverted form for the LCX258. For the Output Enable input at a high level, the outputs are at a high level for the LCX258.

#### Select (Pin 1)

Nibble select. This input determines the data word to be transferred to the outputs. A low level on this input selects the A inputs and a high level selects the B inputs.


#### **CONTROL INPUTS**

#### **Output Enable (Pin 15)**

Output Enable input. A low level on this input allows the selected data to be presented at the outputs. A high level on this input sets all of the outputs to 3-state off.

**PIN NAMES** 

Pins	Function	
An	Source 0 Data Inputs	
Bn	Source B Data Inputs	
ŌĒ	Enable Input	
S	Select Input	
Yn	Outputs	

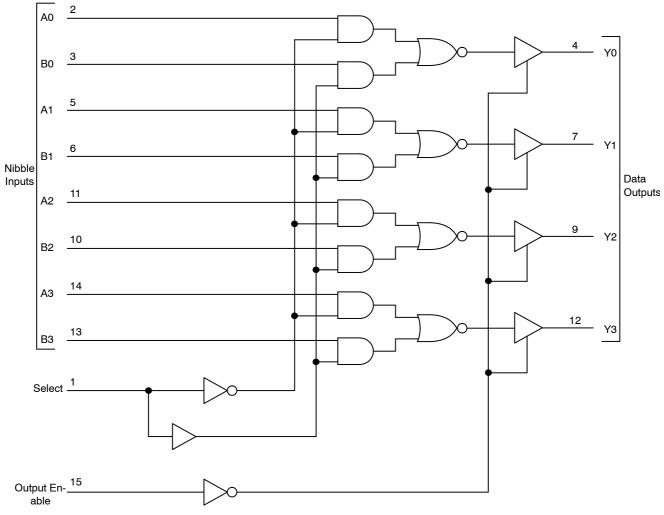



# MAXIMUM RATINGS

Symbol	Parameter	Value	Condition	Units
V <sub>CC</sub>	DC Supply Voltage	-0.5 to +7.0		V
VI	DC Input Voltage	$-0.5 \leq V_l \leq +7.0$		V
Vo	DC Output Voltage	$-0.5 \leq V_O \leq V_{CC} + 0.5$	Note 1	V
Ι <sub>ΙΚ</sub>	DC Input Diode Current	-50	V <sub>I</sub> < GND	mA
I <sub>OK</sub>	DC Output Diode Current	-50	V <sub>O</sub> < GND	mA
		+50	$V_{O} > V_{CC}$	mA
Ι <sub>Ο</sub>	DC Output Source/Sink Current	±50		mA
I <sub>CC</sub>	DC Supply Current Per Supply Pin	±100		mA
I <sub>GND</sub>	DC Ground Current Per Ground Pin	±100		mA
T <sub>STG</sub>	Storage Temperature Range	-65 to +150		°C
MSL	Moisture Sensitivity		Level 1	

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Output in HIGH or LOW State. I<sub>O</sub> absolute maximum rating must be observed.

# **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Тур	Max	Units
V <sub>CC</sub>	Supply Voltage Operating Data Retention Only	2.0 1.5	2.3 to 3.3	3.6 3.6	V
VI	Input Voltage	0		5.5	V
Vo	Output Voltage (HIGH or LOW State)	0		V <sub>CC</sub>	V
I <sub>OH</sub>	$      HIGH Level Output Current \\ V_{CC} = 3.0 V - 3.6 V \\ V_{CC} = 2.7 V - 3.0 V \\ V_{CC} = 2.3 V - 2.7 V $			-24 -12 -8	mA
I <sub>OL</sub>	$      LOW Level Output Current \\ V_{CC} = 3.0 V - 3.6 V \\ V_{CC} = 2.7 V - 3.0 V \\ V_{CC} = 2.3 V - 2.7 V $			+24 +12 +8	mA
T <sub>A</sub>	Operating Free-Air Temperature	-40		+85	°C
$\Delta t/\Delta V$	Input Transition Rise or Fall Rate, V <sub>IN</sub> from 0.8 V to 2.0 V, V <sub>CC</sub> = $3.0$ V	0		10	ns/V

## **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
MC74LCX258DR2G	SOIC-16 (Pb-Free)	2500 / Tape & Reel
MC74LCX258DTG	TSSOP-16 (Pb-Free)	96 Units / Rail
MC74LCX258DTR2G	TSSOP-16 (Pb-Free)	2500 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# DC ELECTRICAL CHARACTERISTICS

			T <sub>A</sub> = −40°C	T <sub>A</sub> = −40°C to +85°C		
Symbol	Characteristic	Condition	Min	Max	Units	
V <sub>IH</sub>	Minimum HIGH Level Input Voltage (Note 2)	$\begin{array}{c} 2.3 \ V \leq V_{CC} \leq 2.7 \ V \\ 2.7 \ V \leq V_{CC} \leq 3.0 \ V \\ 3.0 \ V \leq V_{CC} \leq 3.6 \ V \end{array}$	1.7 2.0 2.0		V	
V <sub>IL</sub>	Maximum LOW Level Input Voltage (Note 2)	$\begin{array}{c} 2.3 \; V \leq V_{CC} \leq 2.7 \; V \\ 2.7 \; V \leq V_{CC} \leq 3.0 \; V \\ 3.0 \; V \leq V_{CC} \leq 3.6 \; V \end{array}$		0.7 0.8 0.8	V	
V <sub>OH</sub>	Minimum HIGH Level Output Voltage	$\begin{array}{c} 2.3 \ V \leq V_{CC} \leq 3.6 \ V; \ I_{OH} = -100 \ \mu A \\ V_{CC} = 2.3 \ V; \ I_{OH} = -8 \ mA \\ V_{CC} = 2.7 \ V; \ I_{OH} = -12 \ mA \\ V_{CC} = 3.0 \ V; \ I_{OH} = -18 \ mA \\ V_{CC} = 3.0 \ V; \ I_{OH} = -24 \ mA \end{array}$	V <sub>CC</sub> - 0.2 1.7 2.2 2.4 2.2		V	
V <sub>OL</sub>	Maximum LOW Level Output Voltage	$\begin{array}{c} 2.3 \ V \leq V_{CC} \leq 3.6 \ V; \ I_{OH} = 100 \ \mu A \\ V_{CC} = 2.3 \ V; \ I_{OH} = 8 \ mA \\ V_{CC} = 2.7 \ V; \ I_{OH} = 12 \ mA \\ V_{CC} = 3.0 \ V; \ I_{OH} = 16 \ mA \\ V_{CC} = 3.0 \ V; \ I_{OH} = 24 \ mA \end{array}$		0.2 0.7 0.4 0.4 0.55	V	
I <sub>OZ</sub>	3-State Output Current	$V_{CC} = 3.6 \text{ V}, V_{IN} = V_{IH} \text{ or } V_{IL}, V_{OUT} = 0 \text{ to } 5.5 \text{ V}$		±5	μΑ	
I <sub>OFF</sub>	Power Off Leakage Current	$V_{CC} = 0, V_{IN} = 5.5 \text{ V or } V_{OUT} = 5.5 \text{ V}$		10	μA	
I <sub>IN</sub>	Input Leakage Current	$V_{CC}$ = 3.6 V, $V_{IN}$ = 5.5 V or GND		±5	μA	
I <sub>CC</sub>	Quiescent Supply Current	$V_{CC}$ = 3.6 V, $V_{IN}$ = 5.5 V or GND		10	μA	
$\Delta I_{CC}$	Increase in I <sub>CC</sub> per Input	$2.3 \text{ V} \leq \text{V}_{CC} \leq 3.6 \text{ V}; \text{ V}_{IH} = \text{V}_{CC} - 0.6 \text{ V}$		500	μΑ	

2. These values of  $V_I$  are used to test DC electrical characteristics only.

# AC ELECTRICAL CHARACTERISTICS

		Limits						
		$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$						
		V <sub>CC</sub> = 3.0	V to 3.6 V	V <sub>CC</sub> =	2.7 V	V <sub>CC</sub> = 2.3	V to 2.7 V	
		C <sub>L</sub> =	50 pF	C <sub>L</sub> =	50 pF	C <sub>L</sub> =	30 pF	
Symbol	Parameter	Min	Max	Min	Max	Min	Max	Units
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay A to B to Y	1.0 1.0	6.5 6.5	1.0 1.0	7.5 7.5	1.0 1.0	8.5 8.5	ns
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay S to Y	1.0 1.0	7.0 7.0	1.0 1.0	8.0 8.0	1.0 1.0	9.0 9.0	ns
t <sub>PZL</sub> t <sub>PZH</sub>	Propagation Delay OE to Y	1.0 1.0	7.0 7.0	1.0 1.0	8.0 8.0	1.0 1.0	9.0 9.0	ns
t <sub>PLZ</sub> t <sub>PHZ</sub>	Propagation Delay OE to Y	1.0 1.0	6.0 6.0	1.0 1.0	7.0 7.0	1.0 1.0	8.0 8.0	ns
t <sub>OSHL</sub> t <sub>OSLH</sub>	Output-to-Output Skew		1.0 1.0					ns


# **DYNAMIC SWITCHING CHARACTERISTICS**

			T <sub>A</sub> = +25°C			
Symbol	Characteristic	Condition	Min	Тур	Max	Units
V <sub>OLP</sub>	Dynamic LOW Peak Voltage (Note 3)	$V_{CC}$ = 3.3 V, $C_{L}$ = 50 pF, $V_{IH}$ = 3.3 V, $V_{IL}$ = 0 V		0.8		V
V <sub>OLV</sub>	Dynamic LOW Valley Voltage (Note 3)	$V_{CC}$ = 3.3 V, $C_L$ = 50 pF, $V_{IH}$ = 3.3 V, $V_{IL}$ = 0 V		0.8		V
O Niumala au	u af autouta dafinada an "n". Manaunad uith "n	4 <sup>8</sup> autoute autitables from UICIL to LOW/ or LOW				


3. Number of outputs defined as "n". Measured with "n-1" outputs switching from HIGH-to-LOW or LOW-to-HIGH. The remaining output is measured in the LOW state.

# **CAPACITIVE CHARACTERISTICS**


Symbol	Parameter	Condition	Typical	Units
C <sub>IN</sub>	Input Capacitance	$V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	7	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	10 MHz, $V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	25	pF

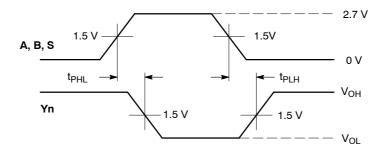

WAVEFORM 1 – NONINVERTING PROPAGATION DELAYS  $t_R$  =  $t_F$  = 2.5 ns, 10% to 90%; f = 1 MHz;  $t_W$  = 500 ns

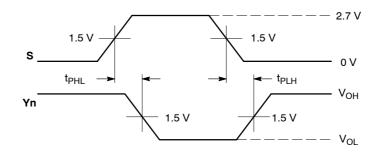

**WAVEFORM 2 – INVERTING PROPAGATION DELAYS**  $t_{\text{R}} = t_{\text{F}} = 2.5 \text{ ns}, 10\% \text{ to } 90\%; \text{ f} = 1 \text{ MHz}; t_{\text{W}} = 500 \text{ ns}$ 

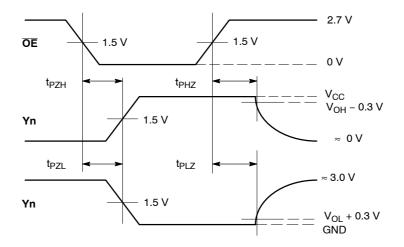





Figure 3. AC Waveforms

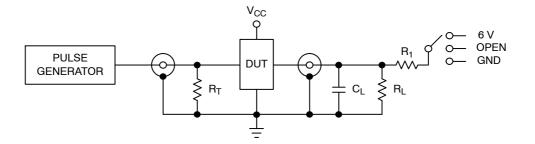

Test	Switch
t <sub>PLH</sub> , t <sub>PHL</sub>	Open
t <sub>PZL</sub> , t <sub>PLZ</sub>	6 V
Open Collector/Drain $t_{PLH}$ and $t_{PHL}$	6 V
t <sub>PZH</sub> , t <sub>PHZ</sub>	GND

 $C_L = 50 \text{ pF}$  or equivalent (Includes jig and probe capacitance)  $R_L = R_1 = 500 \Omega$  or equivalent  $R_T = Z_{OUT}$  of pulse generator (typically 50  $\Omega$ )

Figure 4. Test Circuit






DIMENSIONS: MILLIMETERS

DOCUMENT NUMBER:	98ASB42566B	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	SOIC-16	PAGE 1 OF 1			
ON Semiconductor and 👊 are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding					

ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.



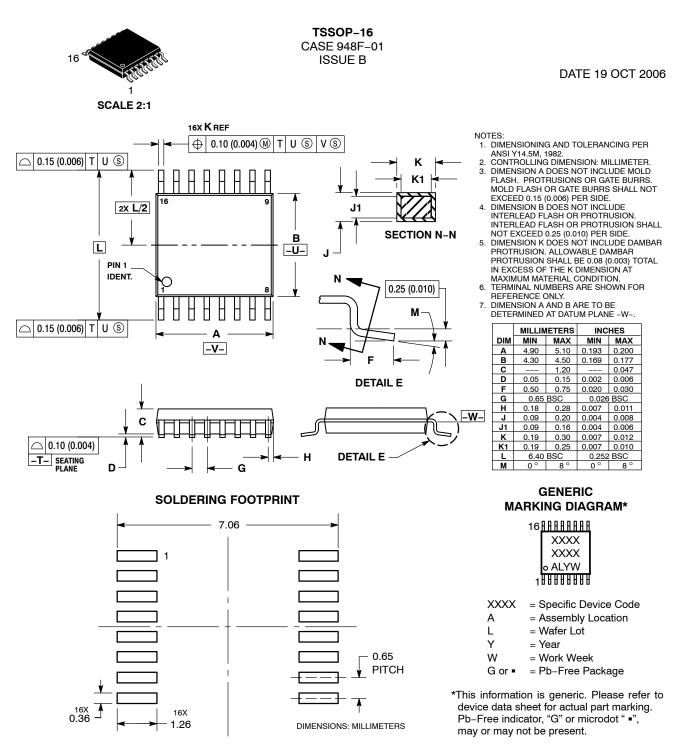

DOCUMENT NUMBER:	98ASH70247A	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	TSSOP-16	PAGE 1 OF 1			
ON Semiconductor and 🔟 are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries.					

ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor date sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use a a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor houteds for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

ON Semiconductor Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada Phone: 011 421 33 790 2910 Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative