# Dual Schmitt-Trigger Inverter

The NLX2G14 MiniGate<sup>™</sup> is an advanced high-speed CMOS dual Schmitt-trigger inverter in ultra-small footprint.

The NLX2G14 input and output structures provide protection when voltages up to 7.0 V are applied, regardless of the supply voltage.

The NLX2G14 can be used to enhance noise immunity or to square up slowly changing waveforms.

#### **Features**

- Designed for 1.65 V to 5.5 V V<sub>CC</sub> Operation
- Low Power Dissipation:  $I_{CC} = 1 \mu A \text{ (Max)}$  at  $T_A = 25 \text{ °C}$
- 24 Balanced Output Source and Sink Capability
- Balanced Propagation Delays
- Overvoltage Tolerant (OVT) Input and Output Pins
- · Ultra-Small Packages
- These are Pb-Free Devices




Figure 1. Pinout (Top View)




Figure 2. Logic Symbol

# FUNCTION TABLE

А	Ÿ
L	H
H	L

1	IN A1
2	GND
3	IN A2
4	OUT ₹2
5	V <sub>CC</sub>
6	OUT \( \overline{\gamma} 1

PIN ASSIGNMENT



#### ON Semiconductor®

www.onsemi.com

### MARKING DIAGRAMS



UDFN6 1.0 x 1.0 CASE 517BX





UDFN6 1.2 x 1.0 CASE 517AA





UDFN6 1.45 x 1.0 CASE 517AQ



T = Device Marking\*
M = Date Code
\* Rotated 90° clockwise

#### ORDERING INFORMATION

See detailed ordering and shipping information on page 5 of this data sheet.

#### **MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit		
Vcc	DC Supply Voltage	DC Supply Voltage			
V <sub>IN</sub>	DC Input Voltage		-0.5 to +7.0	V	
V <sub>OUT</sub>	DC Output Voltage		-0.5 to +7.0	V	
I <sub>IK</sub>	DC Input Diode Current	V <sub>IN</sub> < GND	-50	mA	
lok	DC Output Diode Current	V <sub>OUT</sub> < GND	-50	mA	
I <sub>O</sub>	DC Output Source/Sink Current	C Output Source/Sink Current			
Icc	DC Supply Current Per Supply Pin	±100	mA		
I <sub>GND</sub>	DC Ground Current per Ground Pin	±100	mA		
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	°C		
TL	Lead Temperature, 1 mm from Case for 10 Seco	260	°C		
TJ	Junction Temperature Under Bias	150	°C		
MSL	Moisture Sensitivity	Level 1			
F <sub>R</sub>	Flammability Rating Oxygen	ammability Rating Oxygen Index: 28 to 34			
I <sub>LATCHUP</sub>	Latchup Performance Above V <sub>CC</sub> and Below GN	±500	mA		

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow.
- 2. Tested to EIA/JESD22-A114-A.
- 3. Tested to EIA/UESD22-A115-A.
- 4. Tested to JESD22-C101-A.
- 5. Tested to EIA / JESD78.

### RECOMMENDED OPERATING CONDITIONS

Symbol	Paramet	Min	Max	Unit	
V <sub>CC</sub>	Positive DC Supply Voltage	1.65	5.5	V	
V <sub>IN</sub>	Digital Input Voltage	0	5.5	V	
V <sub>OUT</sub>	Output Voltage	0	5.5	V	
T <sub>A</sub>	Operating Free-Air Temperature	-55	+125	°C	
Δt/ΔV	Input Transition Rise or Fall Rate	V <sub>CC</sub> = 3.3 V ± 0.3 V V <sub>CC</sub> = 5.0 V ± 0.5 V	0 0	No Limit No Limit	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

### DC ELECTRICAL CHARACTERISTICS

			Vcc	T <sub>A</sub> = 25°C		T <sub>A</sub> = -	+85°C		55°C to		
Symbol	Parameter	Conditions	(V)	Min	Тур	Max	Min	Max	Min	Max	Unit
V <sub>T+</sub>	Positive Threshold Voltage		1.65 2.3 2.7 3.0 4.5 5.5	0.6 1.0 1.2 1.3 1.9 2.2	1.0 1.5 1.7 1.9 2.7 3.3	1.4 1.8 2.0 2.2 3.1 3.6	0.6 1.0 1.2 1.3 1.9 2.2	1.4 1.8 2.0 2.2 3.1 3.6	0.6 1.0 1.2 1.3 1.9 2.2	1.4 1.8 2.0 2.2 3.1 3.6	V
V <sub>T</sub> -	Negative Threshold Voltage		1.65 2.3 2.7 3.0 4.5 5.5	0.2 0.4 0.5 0.6 1.0 1.2	0.5 0.75 0.87 1.0 1.5 1.9	0.8 1.15 1.4 1.5 2.0 2.3	0.2 0.4 0.5 0.6 1.0 1.2	0.8 1.15 1.4 1.5 2.0 2.3	0.2 0.4 0.5 0.6 1.0 1.2	0.8 1.15 1.4 1.5 2.0 2.3	V
V <sub>H</sub>	Hysteresis Voltage		1.65 2.3 2.7 3.0 4.5 5.5	0.1 0.25 0.3 0.4 0.6 0.7	0.48 0.75 0.83 0.93 1.2 1.4	0.9 1.1 1.15 1.2 1.5 1.7	0.1 0.25 0.3 0.4 0.6 0.7	0.9 1.1 1.15 1.2 1.5 1.7	0.1 0.25 0.3 0.4 0.6 0.7	0.9 1.1 1.15 1.2 1.5 1.7	V
V <sub>OH</sub>	Minimum High-Level	$V_{IN} \le V_{T-MIN}$ $I_{OH} = -100 \mu A$	1.65- 5.5	V <sub>CC</sub> - 0.1	Vcc		V <sub>CC</sub> - 0.1		V <sub>CC</sub> - 0.1		V
	Output Voltage	$\begin{array}{c} V_{IN} \leq V_{T-MIN} \\ I_{OH} = -4 \text{ mA} \\ I_{OH} = -8 \text{ mA} \\ I_{OH} = -12 \text{ mA} \\ I_{OH} = -16 \text{ mA} \\ I_{OH} = -24 \text{ mA} \\ I_{OH} = -32 \text{ mA} \end{array}$	1.65 2.3 2.7 3.0 3.0 4.5	1.29 1.9 2.2 2.4 2.3 3.8	1.52 2.1 2.4 2.7 2.5 4.0		1.29 1.9 2.2 2.4 2.3 3.8		1.29 1.8 2.1 2.3 2.2 3.7		
V <sub>OL</sub>	Maximum Low-Level Output	$V_{IN} \ge V_{T+MAX}$ $I_{OL} = 100 \mu A$	1.65- 5.5		0	0.1		0.1		0.1	V
	Voltage	$\begin{array}{c} V_{\text{IN}} \geq V_{\text{T+MAX}} \\ I_{\text{OH}} = -4 \text{ mA} \\ I_{\text{OH}} = -8 \text{ mA} \\ I_{\text{OH}} = -12 \text{ mA} \\ I_{\text{OH}} = -16 \text{ mA} \\ I_{\text{OH}} = -24 \text{ mA} \\ I_{\text{OH}} = -32 \text{ mA} \end{array}$	1.65 2.3 2.7 3.0 3.0 4.5		0.08 0.2 0.22 0.28 0.38 0.42	0.24 0.3 0.4 0.4 0.55 0.55		0.24 0.3 0.4 0.4 0.55 0.55		0.24 0.4 0.5 0.5 0.55 0.65	
I <sub>IN</sub>	Input Leakage Current	$0 \le V_{IN} \le 5.5 V$	0 to 5.5			±0.1		±1.0		±1.0	μА
I <sub>OFF</sub>	Power-Off Output Leakage Current	V <sub>OUT</sub> = 5.5 V	0			1.0		10		10	μА
Icc	Quiescent Supply Current	$0 \le V_{IN} \le V_{CC}$	5.5			1.0		10		10	μΑ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

### AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3.0 \text{ ns}$ )

		Vcc	Test	1	Γ <sub>A</sub> = 25°(	:	T <sub>A</sub> = -	+85°C	T <sub>A</sub> = - to +1	-55°C 25°C	
Symbol	Parameter	(V)	Condition	Min	Тур	Max	Min	Max	Min	Max	Unit
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay, Input A to Output Y	2.3-2.7	$R_L = 1 M\Omega$ , $C_L = 15 pF$	1.8	4.3	7.4	1.8	8.1	1.8	9.1	ns
		3.0-3.6	$R_L = 1 M\Omega$ , $C_L = 15 pF$	1.5	3.3	5.0	1.5	5.5	1.5	6.5	
			$R_L = 500 \Omega$ , $C_L = 50 pF$	1.8	4.0	6.0	1.8	6.6	1.8	7.6	
		4.5-5.5	$R_L = 1 M\Omega$ , $C_L = 15 pF$	1.0	2.7	4.1	1.0	4.5	1.0	5.5	
			$R_L = 500 \Omega,$ $C_L = 50 pF$	1.2	3.2	4.9	1.2	5.4	1.2	6.4	
C <sub>IN</sub>	Input Capacitance	5.5	V <sub>IN</sub> = 0 V or V <sub>CC</sub>		2.5						pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 6)	3.3 5.5	10 MHz V <sub>IN</sub> = 0 V or V <sub>CC</sub>		11 12.5						pF

<sup>6.</sup> C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the dynamic operating current consumption without load. Average operating current can be obtained by the equation I<sub>CC(OPR)</sub> = C<sub>PD</sub> • V<sub>CC</sub> • f<sub>in</sub> + I<sub>CC</sub>. C<sub>PD</sub> is used to determine the no-load dynamic power consumption: P<sub>D</sub> = C<sub>PD</sub> • V<sub>CC</sub><sup>2</sup> • f<sub>in</sub> + I<sub>CC</sub> • V<sub>CC</sub>.





Figure 3. Switching Waveforms

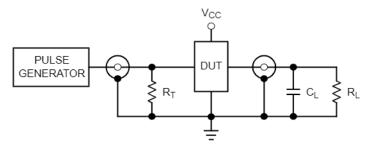

 $R_T$  =  $Z_{OUT}$  of pulse generator (typically 50  $\Omega$ )

Figure 4. Test Circuit


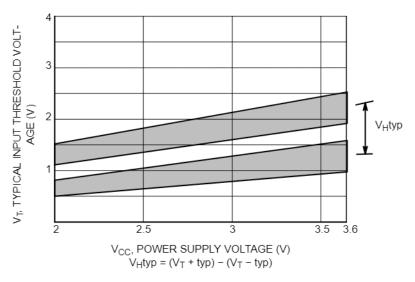


Figure 5. Typical Input Threshold, V<sub>T</sub>+, V<sub>T</sub>-versus Power Supply Voltage

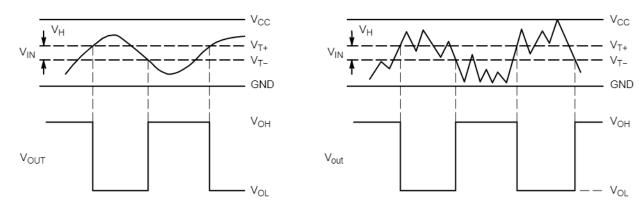

(a) A Schmitt-Trigger Squares Up Inputs With Slow Rise and Fall Times

(b) A Schmitt-Trigger Offers Maximum Noise Immunity

Figure 6. Typical Schmitt-Trigger Applications


#### ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
NLX2G14MUTCG	UDFN6, 1.2 x 1.0, 0.4P (Pb-Free)	3000 / Tape & Reel
NLX2G14AMUTCG	UDFN6, 1.45 x 1.0, 0.5P (Pb-Free)	3000 / Tape & Reel
NLX2G14CMUTCG	UDFN6, 1.0 x 1.0, 0.35P (Pb-Free)	3000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


#### PACKAGE DIMENSIONS

#### UDFN6, 1.2x1.0, 0.4P CASE 517AA ISSUE D

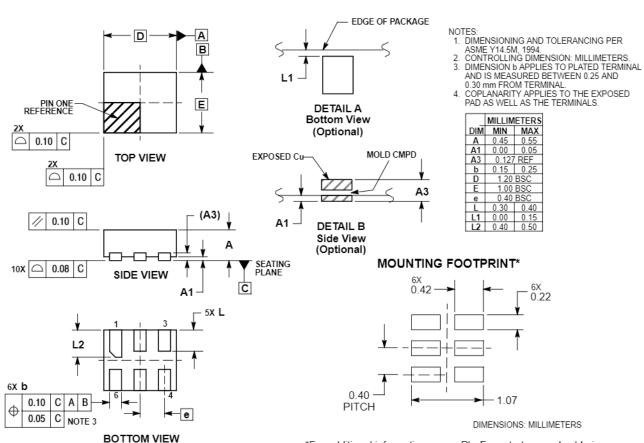

#### PACKAGE DIMENSIONS

# UDFN6 1.45x1.0, 0.5P CASE 517AQ

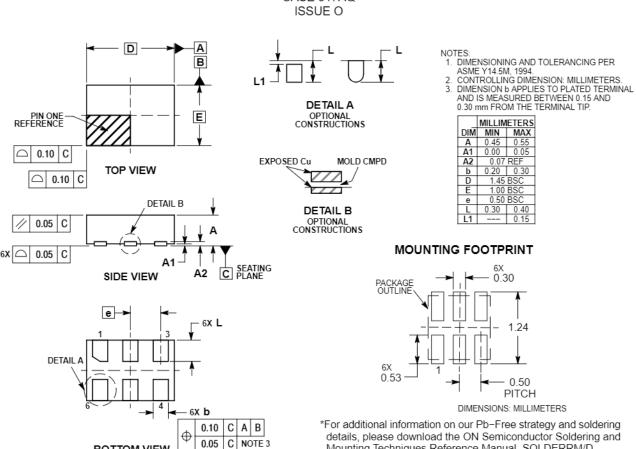


Mounting Techniques Reference Manual, SOLDERRM/D.

0.05

**BOTTOM VIEW** 

#### PACKAGE DIMENSIONS

UDFN6 1.0x1.0, 0.35P CASE 517BX ISSUE O

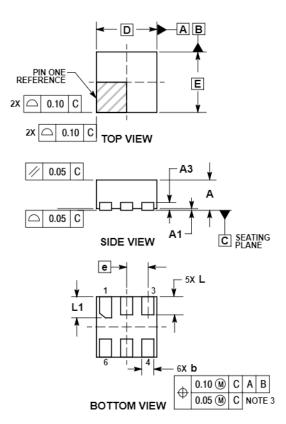


#### NOTES

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
   CONTROLLING DIMENSION: MILLIMETERS
- CONTROLLING DIMENSION: MILLIMETERS
   DIMENSION 6 APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN
- 0.15 AND 0.20 MM FROM TERMINAL TIP.
  4. PACKAGE DIMENSIONS EXCLUSIVE OF BURRS AND MOLD FLASH.

	MILLIMETERS					
DIM	MIN	MAX				
Α	0.45	0.55				
A1	0.00	0.05				
A3	0.13 REF					
b	0.12	0.22				
D	1.00	BSC				
E	1.00 BSC					
е	0.35 BSC					
L	0.25	0.35				
L1	0.30	0.40				

#### RECOMMENDED SOLDERING FOOTPRINT\*



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

MiniGate is a trademark of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify an

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative