# Surface Mount Schottky Power Rectifier

SMA/SMB Power Surface Mount Package



This device employs the Schottky Barrier principle in a metal-to-silicon power rectifier. Features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency switching power supplies; free wheeling diodes and polarity protection diodes.

#### **Features**

- Compact Package with J-Bend Leads Ideal for Automated Handling
- Highly Stable Oxide Passivated Junction
- Guard-Ring for Overvoltage Protection
- Low Forward Voltage Drop
- NBR and NRVB Prefixes for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable\*

#### **Mechanical Characteristics**

- Case: Molded Epoxy
- Epoxy Meets UL 94 V-0 @ 0.125 in
- Weight: 70 mg (SMA), 95 mg (SMB) (Approximately)
- Cathode Polarity Band
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- ESD Ratings:
  - ♦ Machine Model = C
  - ♦ Human Body Model = 3B
- These Devices are Pb-Free and are RoHS Compliant
- Device Meets MSL1 Requirements



ON Semiconductor®

www.onsemi.com

# SCHOTTKY BARRIER RECTIFIER 2.0 AMPERES, 100 VOLTS

# MARKING DIAGRAMS




SMA CASE 403D





1

SMB CASE 403A



A210 = MBRA2H100T3G

NRVBA2H100T3G = MBRS2H100T3G

NBRS2H100T3G A = Assembly Location

Y = Year

B210

WW = Work Week
■ Pb-Free Package

(Note: Microdot may be in either location)

\*\*The Assembly Location code (A) is front side optional. In cases where the Assembly Location is stamped in the package, the front side assembly code may be blank.

### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
MBRA2H100T3G, NRVBA2H100T3G*	SMA (Pb-Free)	5,000 / Tape & Reel
MBRS2H100T3G, NBRS2H100T3G*, NBRS2H100T3G-VF01*	SMB (Pb-Free)	2,500 / Tape & Reel
NRVBA2H100NT3G*	SMA (Pb-Free)	5,000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MBRS2H100T3G, NBRS2H100T3G, MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G

# **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	100	V
Average Rectified Forward Current (T <sub>L</sub> = 150°C)	lo	2.0	Α
Non-Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I <sub>FSM</sub>	130	Α
Storage Temperature Range	T <sub>stg</sub>	-65 to +175	°C
Operating Junction Temperature (Note 1)	TJ	-65 to +175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

# THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction-to-Lead (Note 2) MBRA2H100T3G, NRVBA2H100T3G MBRS2H100T3G, NBRS2H100T3G	$\Psi_{JCL}$	14 12	°C/W
Thermal Resistance, Junction-to-Ambient (Note 2) MBRA2H100T3G, NRVBA2H100T3G MBRS2H100T3G, NBRS2H100T3G	$R_{ hetaJA}$	75 71	°C/W
Thermal Resistance, Junction-to-Ambient (Note 3) MBRA2H100T3G, NRVBA2H100T3G MBRS2H100T3G, NBRS2H100T3G	$R_{ hetaJA}$	275 230	°C/W

<sup>2.</sup> Mounted with 700 mm square copper pad size (Approximately 1 inch square) 1 oz FR4 Board.

# **ELECTRICAL CHARACTERISTICS**

		Value		
Characteristic	Symbol	T <sub>J</sub> = 25°C	T <sub>J</sub> = 125°C	Unit
Maximum Instantaneous Forward Voltage (Note 4) (i <sub>F</sub> = 2.0 A)	VF	0.79	0.65	V
Maximum Instantaneous Reverse Current (Note 4) (V <sub>R</sub> = 100 V)	I <sub>R</sub>	0.008	1.5	mA

<sup>4.</sup> Pulse Test: Pulse Width  $\leq$  380  $\mu s,$  Duty Cycle  $\leq$  2.0%.

<sup>1.</sup> The heat generated must be less than the thermal conductivity from Junction-to-Ambient:  $dP_D/dT_J < 1/R_{\theta JA}$ .

<sup>3.</sup> Mounted with minimum recommended pad size 1 oz FR4 Board.

# MBRS2H100T3G, NBRS2H100T3G, MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G

# **TYPICAL CHARACTERISTICS**

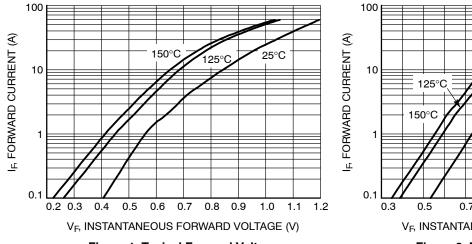


Figure 1. Typical Forward Voltage


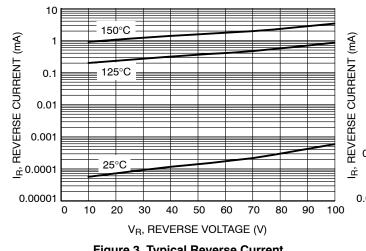


Figure 2. Maximum Forward Voltage



**Figure 3. Typical Reverse Current** 




Figure 4. Maximum Reverse Current

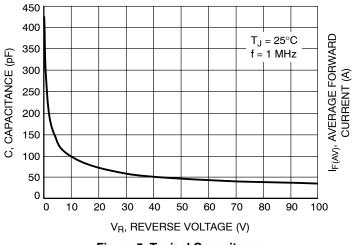


Figure 5. Typical Capacitance





Figure 6. Current Derating - Lead

# MBRS2H100T3G, NBRS2H100T3G, MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G

# **TYPICAL CHARACTERISTICS**



NOILE A TJ = 175°C Square Wave Square Wave dc dc TJ, AVERAGE FORWARD CURRENT (A)

Figure 7. Current Derating, Ambient

Figure 8. Maximum Forward Power Dissipation

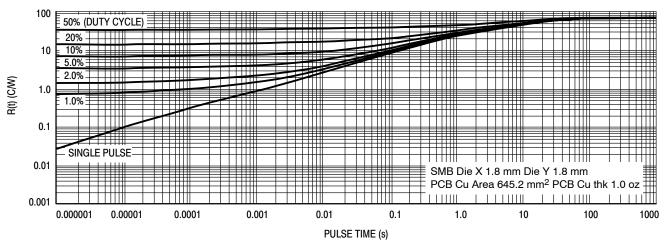


Figure 9. Thermal Response, Junction-to-Ambient (1 inch pad) - MBRS2H100T3G/NBRS2H100T3G

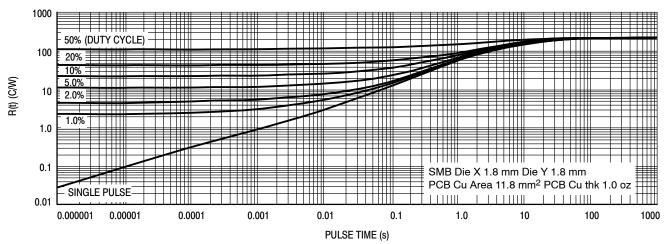


Figure 10. Thermal Response, Junction-to-Ambient (min pad) - MBRS2H100T3G/NBRS2H100T3G

# MBRS2H100T3G, NBRS2H100T3G, MBRA2H100T3G, NRVBA2H100T3G, NRVBA2H100NT3G

# **TYPICAL CHARACTERISTICS**

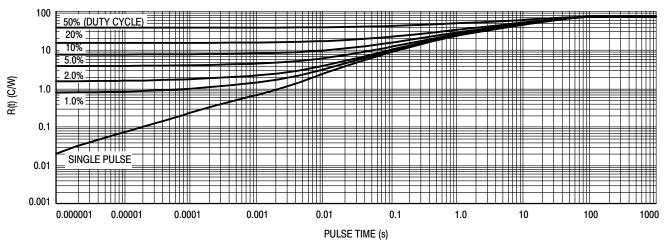


Figure 11. Thermal Response, Junction-to-Ambient (1 inch pad) - MBRA2H100T3G/NRVBA2H100T3G

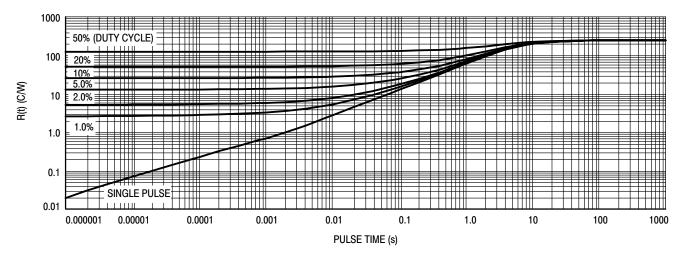


Figure 12. Thermal Response, Junction-to-Ambient (min pad) - MBRA2H100T3G/NRVBA2H100T3G




Figure 13. P<sub>D</sub>, Junction-to-Ambient (URS copper area)







**SMB** CASE 403A-03 **ISSUE J** 

**DATE 19 JUL 2012** 

SCALE 1:1 **Polarity Band** 


Non-Polarity Band







# **SOLDERING FOOTPRINT\***




\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCL.
- 3. DIMENSION b SHALL BE MEASURED WITHIN DIMENSION L1.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	MOM	MAX
Α	1.95	2.30	2.47	0.077	0.091	0.097
A1	0.05	0.10	0.20	0.002	0.004	0.008
b	1.96	2.03	2.20	0.077	0.080	0.087
С	0.15	0.23	0.31	0.006	0.009	0.012
D	3.30	3.56	3.95	0.130	0.140	0.156
E	4.06	4.32	4.60	0.160	0.170	0.181
HE	5.21	5.44	5.60	0.205	0.214	0.220
L	0.76	1.02	1.60	0.030	0.040	0.063
L1		0.51 REF			0.020 REF	

# **GENERIC MARKING DIAGRAM\***





**Polarity Band** 

Non-Polarity Band

XXXXX = Specific Device Code = Assembly Location Α

Υ = Year WW = Work Week = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

DOCUMENT NUMBER:	98ASB42669B	Electronic versions are uncontrolled except when accessed directly from the Document Reposito Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SMB		PAGE 1 OF 1	

ON Semiconductor and un are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

# **MECHANICAL CASE OUTLINE**

PACKAGE DIMENSIONS







**SMA** CASE 403D ISSUE H


**DATE 23 SEP 2015** 

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- DIMENSION b SHALL BE MEASURED WITHIN DIMENSION L.


	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	1.97	2.10	2.20	0.078	0.083	0.087
A1	0.05	0.10	0.20	0.002	0.004	0.008
b	1.27	1.45	1.63	0.050	0.057	0.064
С	0.15	0.28	0.41	0.006	0.011	0.016
D	2.29	2.60	2.92	0.090	0.103	0.115
E	4.06	4.32	4.57	0.160	0.170	0.180
HE	4.83	5.21	5.59	0.190	0.205	0.220
L	0.76	1.14	1.52	0.030	0.045	0.060








#### **SOLDERING FOOTPRINT\***



<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# **GENERIC MARKING DIAGRAM\***



STYLE 1

STYLE 2

= Specific Device Code XXXX = Assembly Location Α

Υ = Year ww = Work Week = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

STYLE 1: PIN 1. CATHODE (POLARITY BAND)

STYLE 2: NO POLARITY

DOCUMENT NUMBER:	98AON04079D	Electronic versions are uncontrolled except when accessed directly from the Document Reposi Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SMA		PAGE 1 OF 1	

ON Semiconductor and un are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# **ON Semiconductor:**

<u>MBRA2H100T3G MBRS2H100T3G NBRS2H100T3G NRVBA2H100T3G NBRS2H100T3G-VF01</u> NRVBA2H100T3G-VF01 NRVBA2H100NT3G SNBRS2H100T3G