

DATASHEET

Technical Data Sheet Opto Interrupter ITR1205ST11A/TR

Features

• Gap: 1.1 mm • Slit: 0.3 mm

• Compact SMD Package

• Pb/Halogens free

• RoHS compliant



Description

• ITR1205ST11A/TR is an ultra small outline photo-interrupter, integrating both infrared emitter and silicon phototransistor detector with plastic molding housing.


Applications

- Printer
- Digital Camera
- Optical switch

Device Selection Guide

Device No.	Chip Material		
IR	AlGaAs		
PT	Silicon		

Package Dimensions

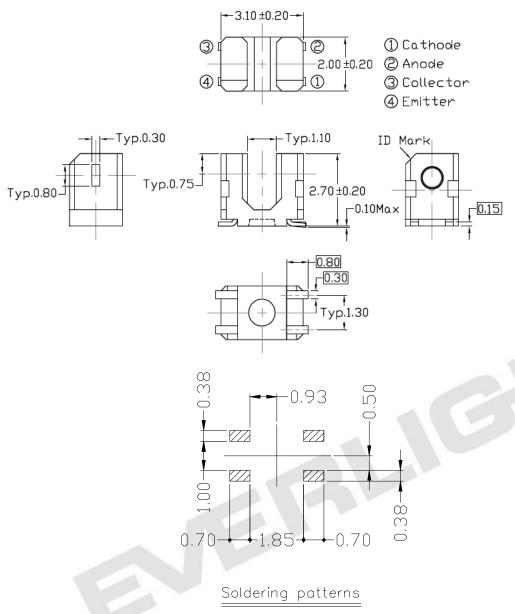

Notes: 1.All dimensions are in millimeters

2. Tolerances unless dimensions ±0.1mm



Absolute Maximum Ratings (Ta=25)


	Parameter	Symbol	Rating	Unit
Input	Power Dissipation at(or below) 25 Free Air Temperature	Pd	75	mW
	Reverse Voltage	V_R	5	V
	Forward Current	I_{F}	50	mA
	Peak Forward Current *1	I_{FP}	1	A
Output	Collector Power Dissipation	P_{C}	75	mW
	Collector Current	I_{C}	20	mA
	Collector-Emitter Voltage	B V _{CEO}	35	V
	Emitter-Collector Voltage	B V _{ECO}	6	V
Operating Temperature		Topr	-40~+85	
Storage Temperature		Tstg	-40~+100	
Lead Soldering Temperature*2		Tsol	260	


Electro-Optical Characteristics (Ta=25)


Parameter		Symbol	Min.	Тур.	Max.	Unit	Condition	
Input	Forward Voltage	V_{F}		1.2	1.4	V	I _F =20mA	
	Reverse Current	I_R	-		10	μΑ	V _R =6V	
	Peak Wavelength	$\lambda_{ m P}$		940		nm	I _F =20mA	
Output	Dark Current	I _{CEO}			0.1	μΑ	V _{CE} =20V	
	C-E Saturation voltage	V _{CE(sat)}			0.4	V	I_c =0.05mA I_F =10mA	
	Collector Current	I _{C(ON)}	150		1000	μΑ	$V_{CE}=2V$, $I_F=5mA$	
Transfer Characteristics	Rise time	$t_{\rm r}$		9		μs	$V_{CE}=5V$ $I_{C}=1$ mA	
	Fall time	t_{f}		8		μs	$R_L=1K\Omega$	




Typical Electrical/Optical/Characteristics Curves

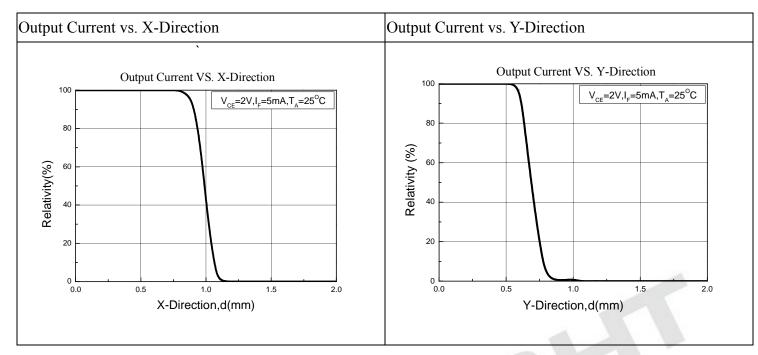

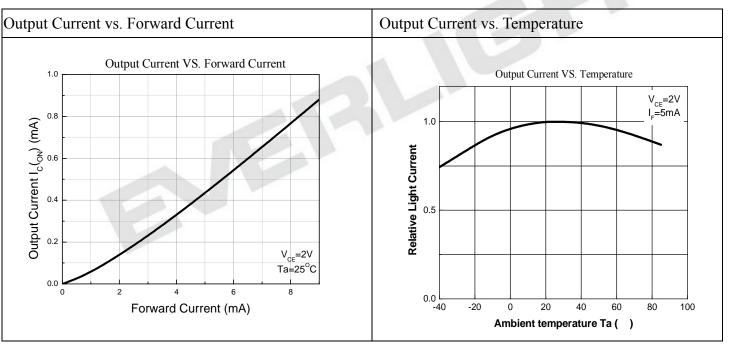

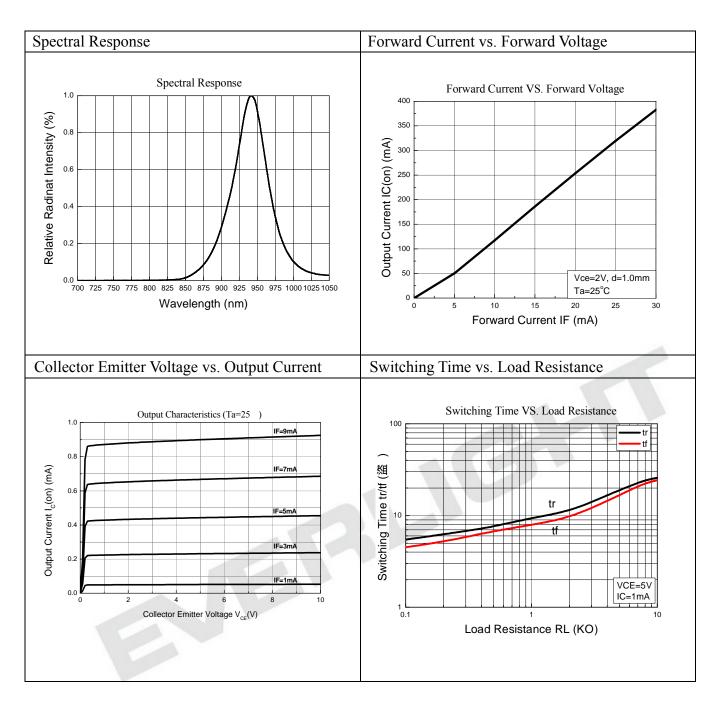


Measuring Circuit For Response Time

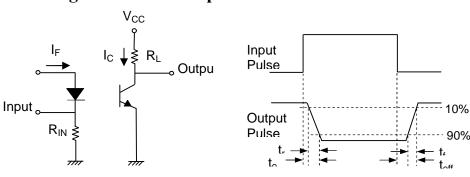


Expired Period: Forever

Taping Dimension

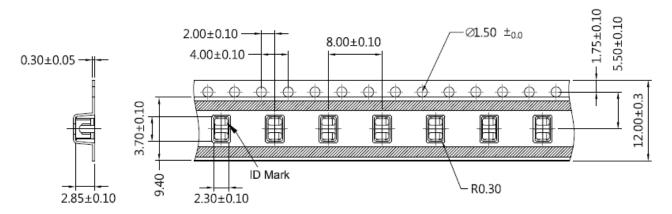

Reel Dimensions

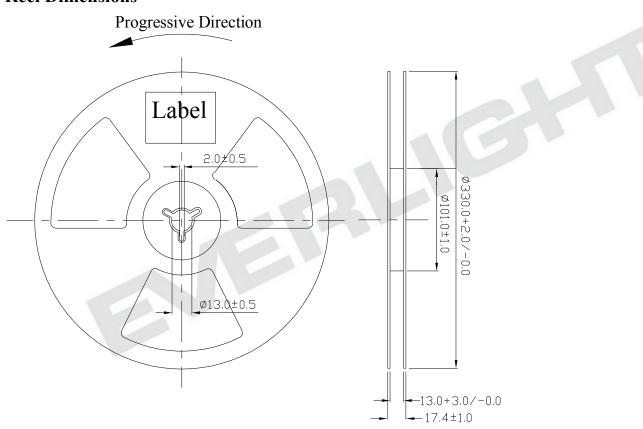

Note: The tolerances unless mentioned is ± 1.0 mm ,Unit = mm

LifecyclePhase:

Approved




Packing Quantity Specification


1. 3000pcs / 1 Reel

2.13 Reels (39Kpcs) / 1 Carton

Packing Procedure

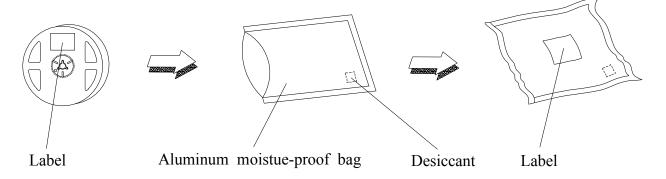

Outer Carton Dimension: 409mm(A)*245mm(B)*360mm(C)





Precautions For Use

The following are general recommendations for moisture sensitive level (MSL) 3 storage and use:


1. Storage

- 1.1 Do not open moisture proof bag before the products are ready to use.
- 1.2 Before opening the package, the device should be kept at 30 or less and 90%RH or less.
- 1.3 The device should be used within a year.
- 1.4 After opening the package, the device should be kept at 30 or less and 70%RH or less.
- 1.5 The device should be used within 168 hours (7 days) after opening the package.
- 1.6 If the moisture absorbent material (silica gel) has faded away or the device have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5 for 24 hours.

2. Soldering Condition

2.1 Pb-free solder temperature profile

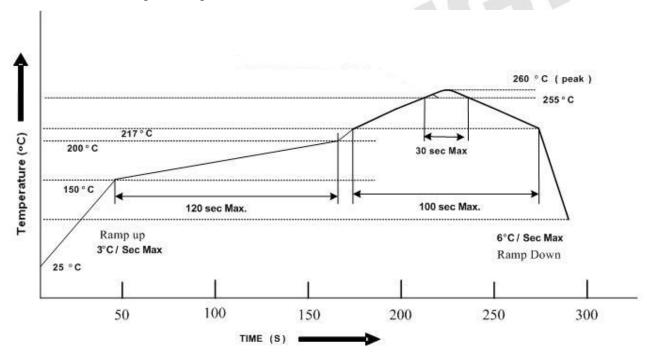

- 2.2 Reflow soldering should not be done more than two times.
- 2.3 When soldering, do not put stress on the device during heating.
- 2.4 After soldering, do not warp the circuit board.

3 8

www.everlight.com



3. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

4. Repairing


Repair should not be done after the device have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the device will or will not be damaged by repairing.



LifecyclePhase:



Label Form Specification



CPN: Customer's Production Number

P/N : Production Number QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

10