

6MHz, Rail-to-Rail I/O CMOS Op Amps

Feature

- **Stable 6MHz GBWP with Low I_Q of Only 480 μ A Typical per Amplifier**
- **Offset Voltage: +/-3mV Maximum**
- **High Slew Rate: 3.7V/ μ s**
- **Input Bias Current: 1pA Typical**
- **CMRR/PSRR:100dB/100dB**
- **Settling time to 0.1% with 2V Step: 0.46us**
- **Beyond the Rails Input Common-Mode Range**
- **Output Swing to within 10mV Typical of each Rail**
- **No Phase Reversal for Overdriven Inputs**
- **Supply Voltage Range: 2.5V to 5.5V**
- **-40°C to 125°C Operation Range**
- **Green, Popular Type Package**

General Description

The HT8631/2 are CMOS op-amps with low offset, stable high frequency response, low power, low supply voltage, and rail-to-rail inputs and outputs.

HT8631/2 have a high gain-bandwidth product of 6MHz, 3.7V/ μ s slew rate while consuming only 480 μ A of supply current per amplifier. The maximum input offset voltage is 3mV for HT8631/2. Beyond the rail input and rail-to-rail output characteristics allow the full power-supply voltage to be used for signal range. The operating range is from 2.5V to 5.5V.

This combination of features makes the HT8631/2 superior among rail-to-rail input/output CMOS op amps in its power class. It is specified over the extended industrial temperature range -40°C to +125°C.

The HT8631/2 can be used as cost-effective plug-in replacements for many commercially available op amps to reduce power and improve input/output range and performance.

Applications

- **Active Filters, ASIC Input or Output Amplifier**
- **Sensor Interface**
- **Smoke/Gas/Environment Sensors**
- **Portable Instruments and Mobile Device**
- **Audio Output**
- **PCMCIA Cards**
- **Battery or Solar Power Systems**
- **Medical Equipment**
- **Piezo Electrical Transducer Amplifier**

Absolute Maximum Ratings

(If out of these ratings, the filter may be fail or damaged)

Table 1

| Symbol | parameter | rating | units |
|------------------|-------------------------------------|----------|-------|
| VDD | Power supply | 6 | V |
| T _A | Operating ambient Temperature Range | -40~+125 | °C |
| T _{STG} | Storage Temperature | -65~+150 | °C |



Recommended Operating Conditions

Table 2

| Symbol | parameter | rating | units |
|----------------|-------------------------------------|----------|-------|
| VDD | Power supply | 2.5~5.5 | V |
| T _A | Operating ambient Temperature Range | -40~+125 | °C |



PIN Definition

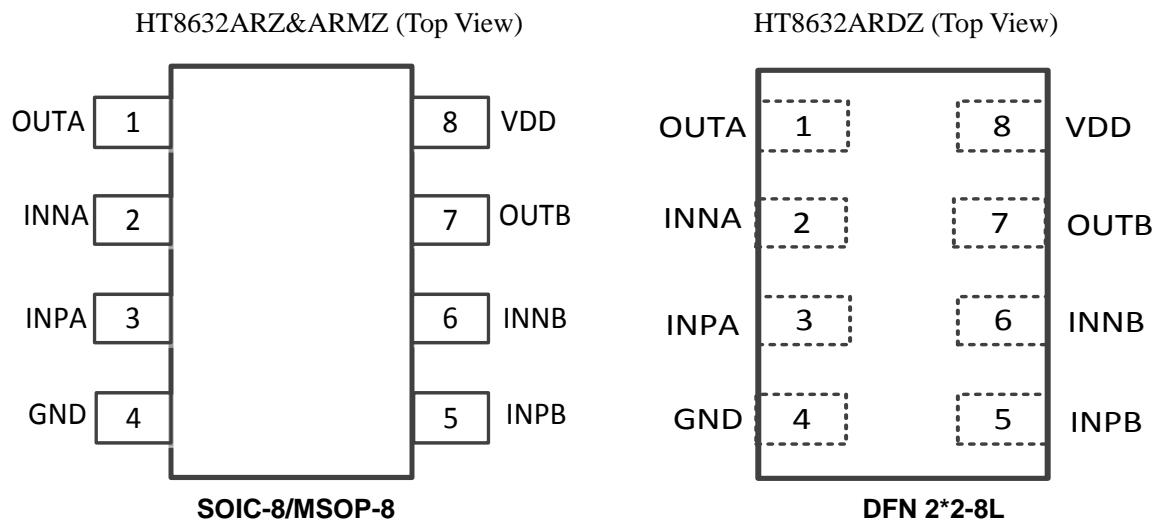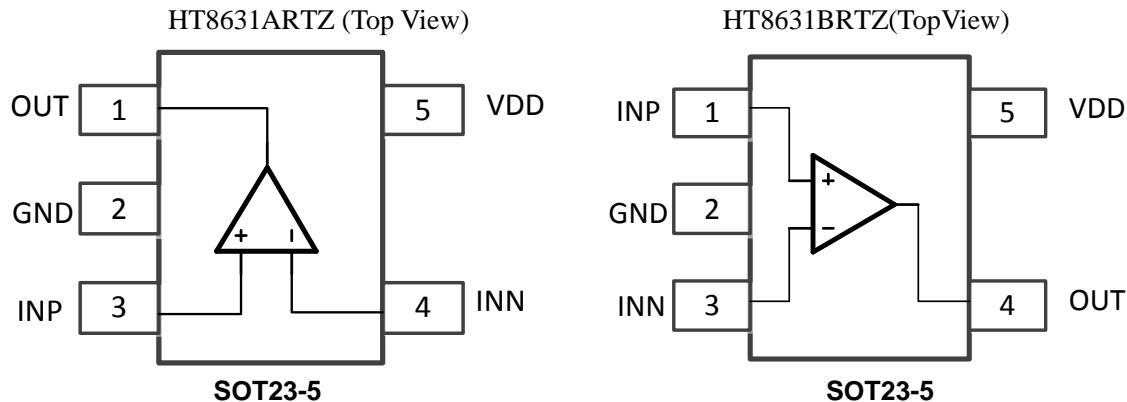

| Name | I/O | Analog/Digital | Description |
|------|--------|----------------|---|
| INP | I | A | Non-Inverting Input of Amplifier. Voltage range of this pin can go from 0 to VDD. |
| GND | GROUND | GROUND | Ground pin. Connect to the most negative supply, ALL GND pads are connected on die. |
| INN | I | A | Inverting Input of Amplifier. This pin has same voltage range as INP. |
| OUT | O | A | Amplifier Output. The voltage range extends to within millivolts of each supply rail. |
| VDD | POWER | POWER | Power supply (5V), connect to positive voltage supply |

Application Circuits

The HT8631/2 of operational amplifier can operate with power supply voltages from 2.5V to 5.5V. Each amplifier draws only 480uA quiescent current. The HT8631/2 can driver larger capacitive loads in unity-gain without oscillation. The unity-gain follower (buffer) is the most sensitive configuration to capacitive loading. When driving large capacitive loads with the HT8631/2 OPA, a small series resistor at the output improves the feedback loop's phase margin and stability by making the output load resistive at higher frequencies.


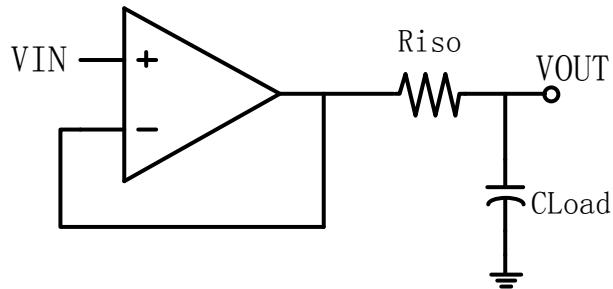



Fig.3 Applications Circuits of HT8631/2

MSOP8

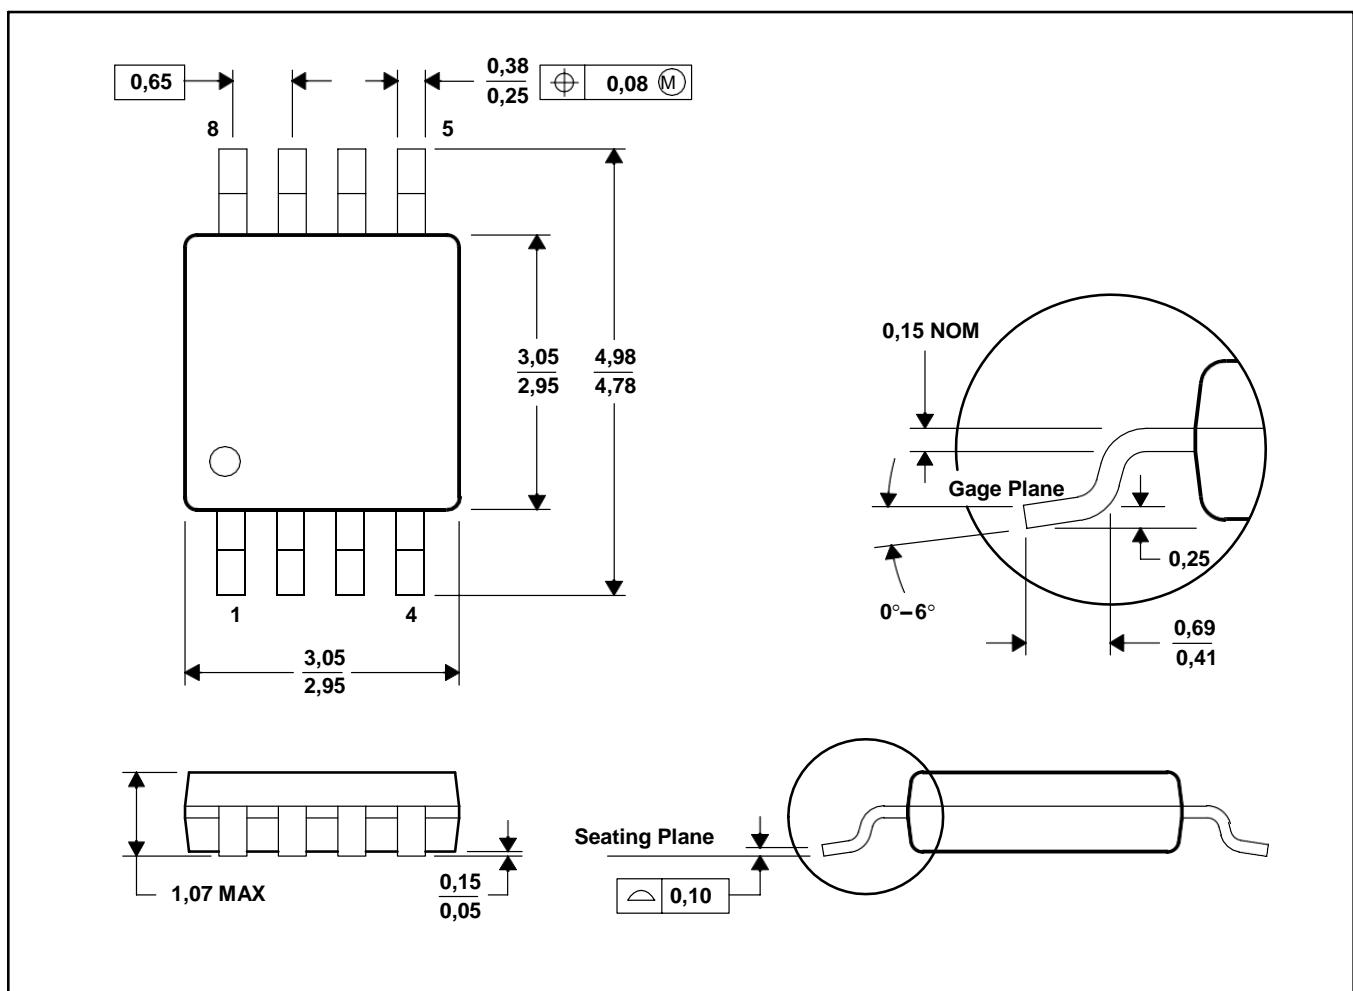


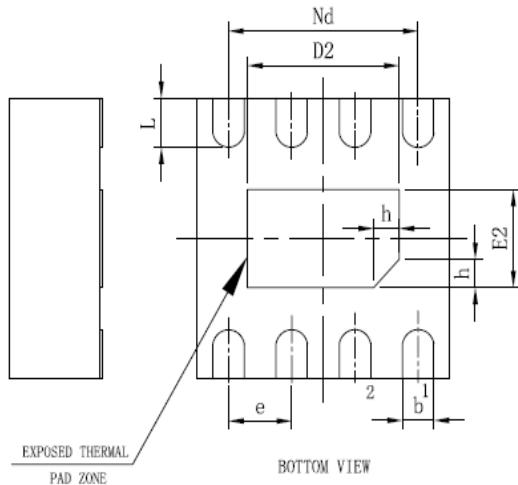
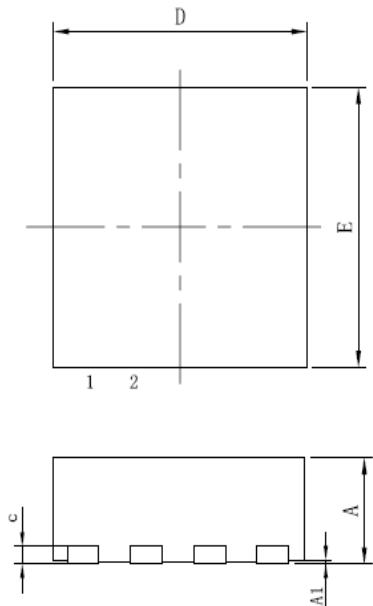
TSSOP8

Unit:mm

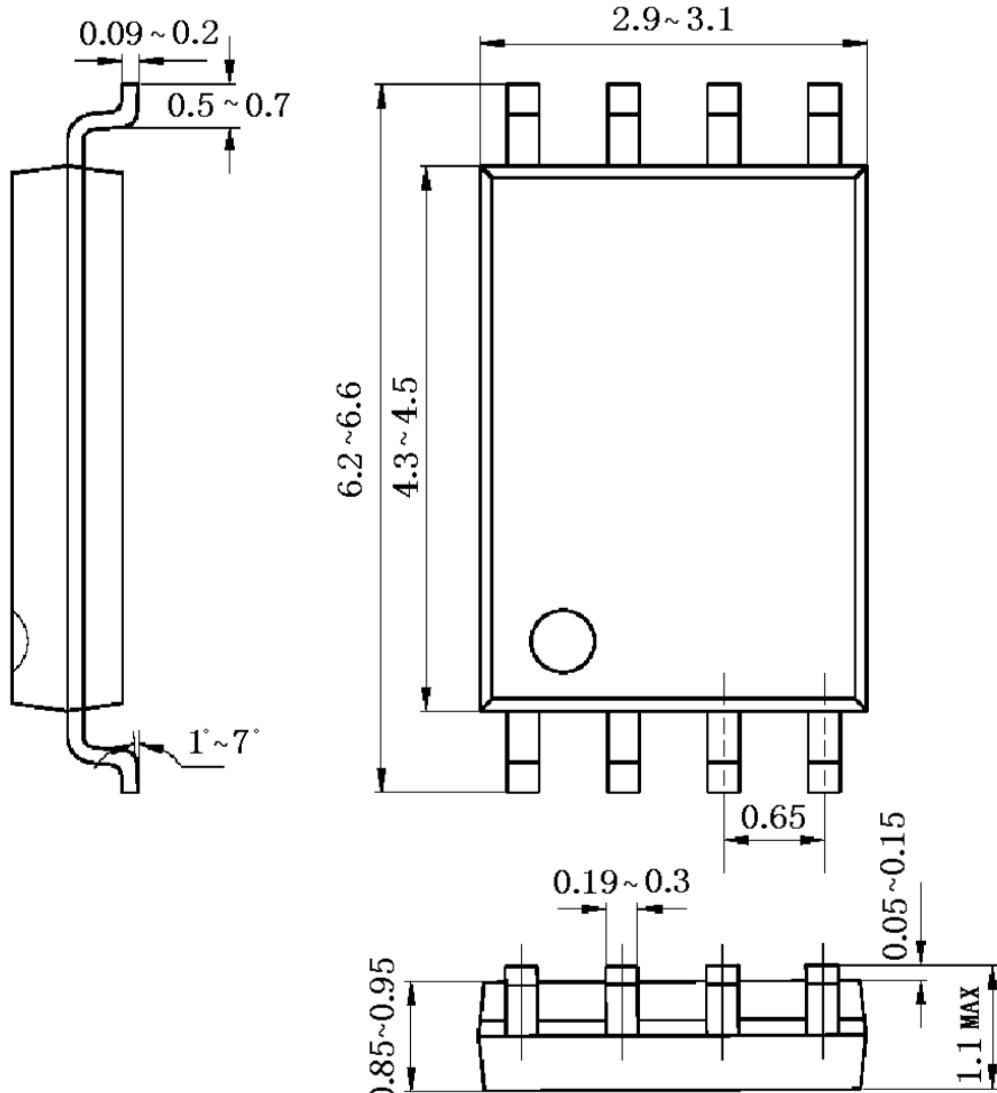



DFN-8L



| SYMBOL | MILLIMETER | | |
|-----------|------------|------|------|
| | MIN | NOM | MAX |
| A | 0.70 | 0.75 | 0.80 |
| A1 | — | 0.02 | 0.05 |
| b | 0.18 | 0.25 | 0.30 |
| c | 0.18 | 0.20 | 0.25 |
| D | 1.90 | 2.00 | 2.10 |
| D2 | 1.10 | 1.20 | 1.30 |
| e | 0.50BSC | | |
| Nd | 1.50BSC | | |
| E | 1.90 | 2.00 | 2.10 |
| E2 | 0.60 | 0.70 | 0.80 |
| L | 0.30 | 0.35 | 0.40 |
| h | 0.15 | 0.20 | 0.25 |
| 整体尺寸 (mm) | 63X39 | | |