
# **TinyLogic ULP-A Dual 2-Input NAND Gate**

# NC7WP00

The NC7WP00 is a dual 2-input NAND gate in tiny footprint packages. The device is designed to operate for  $V_{CC} = 0.9$  V to 3.6 V.

#### Features

- Designed for 0.9 V to 3.6 V V<sub>CC</sub> Operation
- 2.1 ns t<sub>PD</sub> at 3.3 V (Typ)
- Inputs/Outputs Over-Voltage Tolerant up to 3.6 V
- IOFF Supports Partial Power Down Protection
- Source/Sink 2.6 mA at 3.3 V
- Available in US8 and MicroPak<sup>TM</sup> Packages
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant






Figure 1. Pinout Diagrams (Top Views)




Figure 2. Logic Symbol



# **ON Semiconductor®**

www.onsemi.com

#### MARKING DIAGRAMS UQFN8 CCKK 1.6X1.6, 0.5P XYZ CASE 523AY 88888 XXXX US8 ALYW CASE 846AN CC, XXXX = Specific Device Code = 2-Digit Lot Run Traceability Code = 2-Digit Date Code Format = Assembly Plant Code = Assembly Site = Wafer Lot Number

= Assembly Start Week

#### **ORDERING INFORMATION**

See detailed ordering, marking and shipping information on page 6 of this data sheet.

#### **PIN ASSIGNMENT**

Pin	US8	UQFN8
1	A1	Y1
2	B1	B2
3	Y2	A2
4	GND	GND
5	A2	Y2
6	B2	B1
7	Y1	A1
8	V <sub>CC</sub>	V <sub>CC</sub>

#### FUNCTION TABLE (Y = $\overline{AB}$ )

KΚ XY

Ζ

А L

YW

Inp	Output	
А	В	Y
L	L	Н
L	н	Н
н	L	Н
н	Н	L

NOTE: H = HIGH Logic Level L = LOW Logic Level

#### © Semiconductor Components Industries, LLC, 2005 February, 2021 - Rev. 1

#### MAXIMUM RATINGS

Symbol	Characteri	stics	Value	Unit
V <sub>CC</sub>	DC Supply Voltage		-0.5 to +4.3	V
V <sub>IN</sub>	DC Input Voltage		-0.5 to +4.3	V
V <sub>OUT</sub>	DC Output Voltage	Active-Mode (High or Low State) Tri-State Mode (Note 1) Power-Down Mode (V <sub>CC</sub> = 0 V)	-0.5 to V <sub>CC</sub> + 0.5 -0.5 to +4.3 -0.5 to +4.3	V
I <sub>IK</sub>	DC Input Diode Current	V <sub>IN</sub> < GND	-50	mA
I <sub>OK</sub>	DC Output Diode Current	V <sub>OUT</sub> < GND	-50	mA
I <sub>OUT</sub>	DC Output Source/Sink Current		±50	mA
I <sub>CC</sub> or I <sub>GND</sub>	DC Supply Current per Supply Pin or Ground	nd Pin	±50	mA
T <sub>STG</sub>	Storage Temperature Range		-65 to +150	°C
ΤL	Lead Temperature, 1 mm from Case for 10	Seconds	260	°C
TJ	Junction Temperature Under Bias		+150	°C
$\theta_{JA}$	Thermal Resistance (Note 2)	US8 MicroPak	250 210	°C/W
PD	Power Dissipation in Still Air	US8 MicroPak	500 595	mW
MSL	Moisture Sensitivity		Level 1	-
F <sub>R</sub>	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	-
$V_{\text{ESD}}$	ESD Withstand Voltage (Note 3)	Human Body Model Charged Device Model	2000 1000	V
I <sub>Latchup</sub>	Latchup Performance (Note 4)		±100	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

 Applicable to devices with outputs that may be tri-stated.
Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow per JESD51-7.
HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued.

4. Tested to EIA/JÉSD78 Class II.

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter		Min	Max	Unit
V <sub>CC</sub>	Positive DC Supply Voltage		0.9	3.6	V
V <sub>IN</sub>	DC Input Voltage		0	3.6	V
V <sub>OUT</sub>	DC Output Voltage	Active-Mode (High or Low State) Tri-State Mode (Note 1) Power-Down Mode (V <sub>CC</sub> = 0 V)	0 0 0	V <sub>CC</sub> 3.6 3.6	
T <sub>A</sub>	Operating Temperature Range		-40	+85	°C
t <sub>r</sub> , t <sub>f</sub>	Input Transition Rise and Fall Time	$V_{CC}=3.3~V\pm0.3~V$	0	10	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

## NC7WP00

#### DC ELECTRICAL CHARACTERISTICS

				Т	A = 25°	с	T <sub>A</sub> = -40°0	C to +85°C	
Symbol	Parameter	Condition	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Uni
V <sub>IH</sub>	High-Level Input		0.9	-	0.5	-	-	_	V
	Voltage		1.1 to 1.3	$0.65 \times V_{CC}$	-	-	0.65 x V <sub>CC</sub>	_	
			1.4 to 1.6	$0.65 \times V_{CC}$	-	-	$0.65 \times V_{CC}$	-	
			1.65 to 1.95	$0.65 \times V_{CC}$	-	-	0.65 x V <sub>CC</sub>	_	
			2.3 to 2.7	1.6	-	-	1.6	-	
			3.0 to 3.6	2.1	-	-	2.1	-	
V <sub>IL</sub>	Low-Level Input		0.9	-	0.5	-	-	-	V
	Voltage		1.1 to 1.3	-	-	$0.35 \times V_{CC}$	-	$0.35 \times V_{CC}$	1
			1.4 to 1.6	-	-	$0.35 \times V_{CC}$	-	$0.35 \times V_{CC}$	1
			1.65 to 1.95	-	-	$0.35 \times V_{CC}$	-	$0.35 \times V_{CC}$	1
			2.3 to 2.7	_	-	0.7	-	0.7	1
			3.0 to 3.6	_	-	0.9	-	0.9	1
V <sub>OH</sub>	High-Level Output	$V_{IN} = V_{IH} \text{ or } V_{IL}$							V
	Voltage	I <sub>OH</sub> = -20 μA	0.9	_	V <sub>CC</sub> - 0.1	-	_	-	
			1.1 to 1.3	V <sub>CC</sub> - 0.1	-	-	V <sub>CC</sub> – 0.1	-	
			1.4 to 1.6	V <sub>CC</sub> - 0.1	-	-	V <sub>CC</sub> – 0.1	-	
			1.65 to 1.95	V <sub>CC</sub> – 0.1	-	_	V <sub>CC</sub> – 0.1	_	1
			2.3 to 2.7	V <sub>CC</sub> – 0.1	-	_	V <sub>CC</sub> – 0.1	_	1
			3.0 to 3.6	V <sub>CC</sub> – 0.1	-	-	V <sub>CC</sub> – 0.1	-	
		I <sub>OH</sub> = -0.5 mA	1.1 to 1.3	$0.75 \times V_{CC}$	-	-	$0.70 \times V_{CC}$	-	
		I <sub>OH</sub> = -1 mA	1.4 to 1.6	1.07	-	-	0.99	-	
		I <sub>OH</sub> = -1.5 mA	1.65 to 1.95	1.24	-	-	1.22	-	
		I <sub>OH</sub> = -2.1 mA	2.3 to 2.7	1.95	-	-	1.87	-	
		I <sub>OH</sub> = -2.6 mA	3.0 to 3.6	2.61	-	-	2.55	-	
V <sub>OL</sub>	Low-Level Output	$V_{IN} = V_{IH} \text{ or } V_{IL}$							V
	Voltage	I <sub>OL</sub> = 20 μA	0.9	-	0.1	-	-	-	
			1.1 to 1.3	-	-	0.1	-	0.1	
			1.4 to 1.6	-	-	0.1	-	0.1	
			1.65 to 1.95	-	-	0.1	-	0.1	
			2.3 to 2.7	-	-	0.1	-	0.1	
			3.0 to 3.6	_	-	0.1	-	0.1	1
		I <sub>OL</sub> = 0.5 mA	1.1 to 1.3	_	-	0.3 x V <sub>CC</sub>	-	0.3 x V <sub>CC</sub>	1
		I <sub>OL</sub> = 1 mA	1.4 to 1.6	_	-	0.31	-	0.37	1
		I <sub>OL</sub> = 1.5 mA	1.65 to 1.95	_	-	0.31	-	0.35	]
		I <sub>OL</sub> = 2.1 mA	2.3 to 2.7	-	-	0.31	-	0.33	1
		I <sub>OL</sub> = 2.6 mA	3.0 to 3.6	-	-	0.31	-	0.33	1
I <sub>IN</sub>	Input Leakage Current	V <sub>IN</sub> = 0 V to 3.6 V	0.9 to 3.6	-	-	±0.1	-	±0.5	μA
I <sub>OFF</sub>	Power Off Leakage Current	$V_{IN} = 0 V \text{ to } 3.6 V \text{ or}$ $V_{OUT} = 0 V \text{ to } 3.6 V$	0	_	-	0.5	_	0.5	μΑ
I <sub>CC</sub>	Quiescent Supply Current	$V_{IN} = V_{CC}$ or GND	0.9 to 3.6	-	-	0.9	-	0.9	μΑ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


#### AC ELECTRICAL CHARACTERISTICS

				٦	Γ <sub>A</sub> = 25°0	2	T <sub>A</sub> = -40°C to +85°C		
Symbol	Parameter	Condition	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Unit
	Propagation Delay,	$R_L$ = 1 M $\Omega$ , $C_L$ = 10 pF	0.9	-	40.7	-	-	-	ns
	(A or B) to Y	A or B) to Y Figures 3 and 4)	1.10 to 1.30	-	10.9	23.5	-	31.0	
			1.40 to 1.60	-	5.6	12.0	-	14.0	
			1.65 to 1.95	-	3.7	10.0	-	12.0	
			2.3 to 2.7	-	2.7	7.0	-	8.0	
			3.0 to 3.6	-	2.1	6.0	-	7.0	
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay,	$R_L = 1 M\Omega$ , $C_L = 15 pF$	0.9	-	42.2	-	-	-	ns
	(A or B) to Y (Figures 3 and 4)		1.10 to 1.30	-	11.4	24.9	-	34.0	
			1.40 to 1.60	-	6.0	13.0	-	16.0	
			1.65 to 1.95	-	4.0	10.0	-	12.0	
			2.3 to 2.7	-	3.0	7.0	-	8.0	
			3.0 to 3.6	-	2.3	6.0	-	7.0	
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay,	$R_L = 1 M\Omega$ , $C_L = 30 pF$	0.9	-	46.4	-	-	-	ns
	(A or B) to Y (Figures 3 and 4)		1.10 to 1.30	-	13.0	28.9	-	43.0	
			1.40 to 1.60	-	7.3	16.0	-	18.0	
			1.65 to 1.95	-	5.1	12.0	-	14.0	
			2.3 to 2.7	-	3.7	9.0	-	10.0	
			3.0 to 3.6	-	2.9	7.0	-	9.0	

#### **CAPACITIVE CHARACTERISTICS**

Symbol	Parameter	Test Condition	Typical (T <sub>A</sub> = 25°C)	Unit
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = 0 V	2.0	pF
C <sub>OUT</sub>	Output Capacitance	V <sub>CC</sub> = 0 V	4.0	pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 5)	f = 10 MHz, $V_{CC}$ = 0.9 to 3.6 V, $V_{IN}$ = 0 V or $V_{CC}$	6.0	pF

5.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation  $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}$ .  $C_{PD}$  is used to determine the no–load dynamic power consumption:  $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$ .



Test	Switch Position
t <sub>PLH</sub> / t <sub>PHL</sub>	Open
t <sub>PLZ</sub> / t <sub>PZL</sub>	2 x V <sub>CC</sub>
t <sub>PHZ</sub> / t <sub>PZH</sub>	GND

V<sub>mi</sub>

-t<sub>PLZ</sub>

t<sub>PHZ</sub>

- V<sub>CC</sub>

GND

~V<sub>CC</sub>


 $V_{OL} + V_{Y}$ - - V<sub>OL</sub>

V<sub>OH</sub> –

V<sub>OH</sub> I – VY

~0 V

Figure 3. Test Circuit

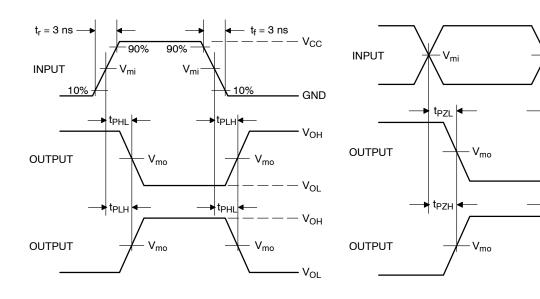

V <sub>CC</sub> , V	V <sub>mi</sub> , V	V <sub>mo</sub> , V	V <sub>Y</sub> , V
0.9	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.1
1.1 to 1.3	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.1
1.4 to 1.6	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.1
1.65 to 1.95	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.15
2.3 to 2.7	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.15
3.0 to 3.6	1.5	1.5	0.3

Figure 4. Switching Waveforms


#### **ORDERING INFORMATION**

Device	Package	Marking	Pin 1 Orientation (See below)	Shipping <sup>†</sup>
NC7WP00K8X	US8	WP00	Q4	3000 / Tape & Reel
NC7WP00L8X	MicroPak, UQFN8	Y3	Q4	5000 / Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


## Pin 1 Orientation in Tape and Reel

## Direction of Feed




MicroPak is trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.






DATE 31 AUG 2016



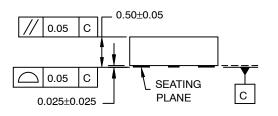


SIDE VIEW

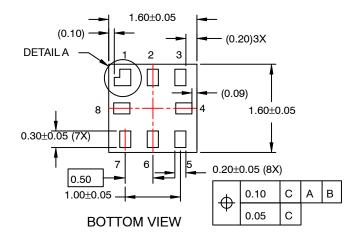



NOTES:

- A. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.
- D. LAND PATTERN RECOMMENDATION IS EXISTING INDUSTRY LAND PATTERN.




DOCUMENT NUMBER:	98AON13591G	Electronic versions are uncontrolled except when accessed directly from the Document Reposit Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.						
DESCRIPTION:	UQFN8 1.6X1.6, 0.5P		PAGE 1 OF 1					
ON Semiconductor reserves the right the suitability of its products for any pa	to make changes without further notice to an articular purpose, nor does ON Semiconducto	y products herein. ON Semiconductor makes no warranty, representation or assume any liability arising out of the application or use of any product or	ON Semiconductor and 🔟 are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the					


© Semiconductor Components Industries, LLC, 2019




US8 CASE 846AN ISSUE O


DATE 31 DEC 2016

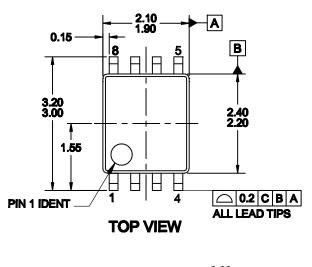

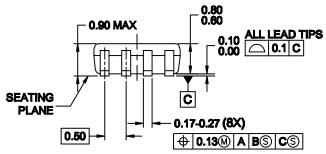



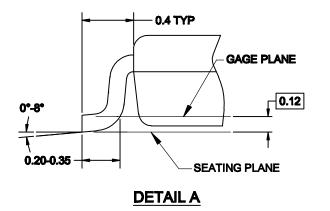




#### **RECOMMENDED LAND PATTERN**

# NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-187
- **B. DIMENSIONS ARE IN MILLIMETERS.**
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1994.

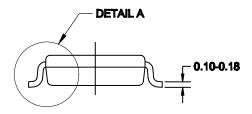

DOCUMENT NUMBER:	98AON13778G	BAON13778G Electronic versions are uncontrolled except when accessed directly from the Document Repo Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.					
DESCRIPTION:	US8	PAGE 1 OF 1					
ON Semiconductor reserves the right the suitability of its products for any pa	to make changes without further notice to an articular purpose, nor does ON Semiconducto	stries, LLC dba ON Semiconductor or its subsidiaries in the United States y products herein. ON Semiconductor makes no waranty, representation r assume any liability arising out of the application or use of any product or cidental damages. ON Semiconductor does not convey any license under	or guarantee regarding circuit, and specifically				

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcular performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

Email Requests to: orderlit@onsemi.com onsemi Website: www.onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative