

# **KBJ10005 THRU KBJ1010**


SINGLE PHASE 10.0 AMP BRIDGE RECTIFIERS



### **FEATURES**

- \* Ideal for printed circuit board
- \* Low forward voltage
- \* Low leakage current
- \* Mounting position: Any

# VOLTAGE RANGE 50 to 1000 Volts CURRENT

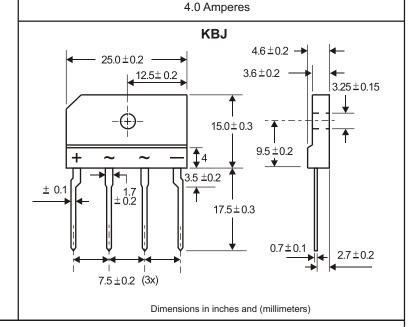

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwies specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

TYPE NUMBER		KBJ10005	KBJ1001	KBJ1002	KBJ1004	KBJ1006	KBJ1008	KBJ1010	UNITS
Maximum Recurrent Peak Reverse Voltage		50	100	200	400	600	800	1000	V
Maximum RMS Voltage		35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage		50	100	200	400	600	800	1000	V
Maximum Average Forward (with heatsink Note 2)		10.0							Α
Rectified Current at Tc=110°C (Without heatsink)		3.0							Α
Peak Forward Surge Current, 8.3 ms single half sine-wave									
superimposed on rated load (JEDEC method)		200							Α
Maximum Forward Voltage Drop per Bridge Element at 5.0A D.C.		1.05							V
Maximum DC Reverse Current	Ta=25℃	5.0					μА		
at Rated DC Blocking Voltage	Ta=100°C				500				μА
Typical Thermal Resistance R Jc (Note 1)		2.3							°C/W
Typical Thermal Resistance R JL (Note 2)		6.0							°C/W
Operating Temperature Range, TJ		-55 — +150							°C
Storage Temperature Range, Тятс		-55 —+150							°C

#### NOTES:

- 1. Thermal Resistance from Junction to Case with device mounted on 100mm x 100mm x 1.6mm Cu Plate Heatsink.
- 2. Thermal Resistance from Junction to Lead without Heatsink.

REV 1.0 2015 JAN PAGE:1/2

#### RATING AND CHARACTERISTIC CURVES (KBJ10005 THRU KBJ1010)

