

# **SR520U THRU SR5250U**

5.0 AMP. Schottky Barrier Rectifiers

### **Features**

Plastic package has Underwriters Laboratory
Flammability Classification 94V-0 utilizing
Flame Retardant Epoxy Molding Compound.

- Guard ring for overvoltage protection
- · High current capability, low forward voltage drop
- · Low power loss, high efficiency
- · High surge capability

#### **Mechanical Data**


· Case: Molded plastic DO-201AD

 Terminals: Plated leads solderable per MIL-STD-202, Method 208 guaranteed

· Polarity: Color band dentes cathode end

Mounting Position: AnyMaking: Type Number

· Lead Free: For RoHS/Lead Free Version

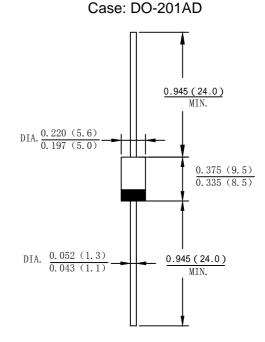

Dimensions in inches and (millimeters)

## **Maximum Ratings and Electrical Characteristics**

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

1 of capacitive load defate current by 2070													
Type Number	SYMBOL	SR 520U	SR 530U	SR 540U	SR 545U	SR 550U	SR 560U	SR 580U	SR 5100U	SR 5150U	SR 5200U	SR 5250U	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	45	50	60	80	100	150	200	250	V
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	31.5	35	42	56	70	105	140	175	V
Maximum DC Blocking Voltage	VDC	20	30	40	45	50	60	80	100	150	200	250	V
Average Rectified Output Current (Note 1) @T <sub>L</sub> =100°C	<b>I</b> F(AV)	5.0											Α
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	İfsm	150										А	
I <sup>2</sup> t Rating for Fusing (t < 8.3ms)	l²t	93.375											A <sup>2</sup> s
Forward Voltage @IF=5.0A	V <sub>FM</sub>	0.53 0.67					).67	0	.82	0.90		0.92	V
Peak Reverse Current @T <sub>A</sub> =25°C	l <sub>-</sub>	0.2 0.05									mA		
At Rated DC Blocking Voltage @T <sub>A</sub> =100°C	- Ir		10.0							5.0			
Typical Junction Capacitance (Note 2)	CJ	220 110								pF			
Typical Thermal Resistance Junction to Ambient(Note 1)	RеJA	65											°C/W
Operating Temperature Range	TJ	-55 to + 150											$^{\circ}\mathbb{C}$
Storage Temperature Range	Тѕтс	-55 to + 150											$^{\circ}$

Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case

2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C

version:05 1 of 3



# **SR520U THRU SR5250U**

5.0 AMP. Schottky Barrier Rectifiers

FIG. 1 - FORWARD CURRENT DERATING CURVE

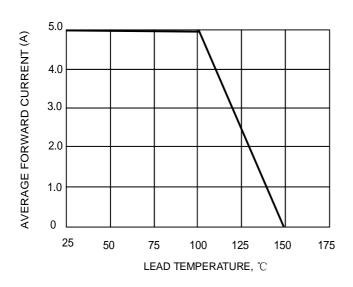


FIG.2-TYPICAL FORWARD CHARACTERISTICS

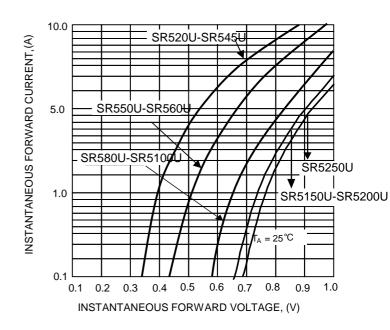


FIG. 3 MAXIMUM NON-REPETITIVE SURGE CURRENT


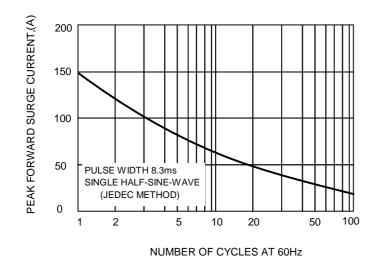


FIG.4 TYPICAL JUNCTION CAPACITANCE



version:05 2 of 3

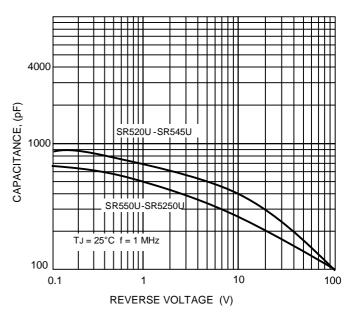

## **SR520U THRU SR5250U**

5.0 AMP. Schottky Barrier Rectifiers

## **Important Notice and Disclaimer**

- Reproducing and modifying information of the document is prohibited without permission from XINNUO
- XINNUO reserves the right to make changes to this document and its products and specifications
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications.
  - XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown here in are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own ris k andagree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.

version:05 3 of 3