


#### Features

- I RoHS compliant.
- I Bilateral symmetrical.
- I Less decay at on/off state.
- Approximately zero leaking current before clamping voltage
- I High capability to withstand repeated lightning strikes.
- Low electrode capacitance(≤1.0pF) and high isolation
  (≥100MΩ).
- I Temperature, humidity and lightness insensitive.
- I Working temperature range: : -45  $^{\circ}$ C ~ +85  $^{\circ}$ C
- I Storaging temperature range:  $-45^{\circ}$ C ~  $+85^{\circ}$ C


## Applications

- I Power Supplies
- I Motor sparks eliminating
- I Relay switching spark absorbing
- I Data line pulse guarding
- I Telephone/Fax/Modem

# Part Number Code



- I Satellite antenna
- I Radio amplifiers
- I Alarm systems
  - Cathode ray tubes in Monitors/ Television Viewing Systems

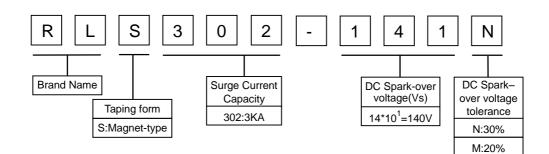

I







**RLS302 Series** 

#### **Electrical Characteristics**

Type Number	DC Spark-Over Voltage	Min. Insulation Resistance		Max. Capacitance (1kHz-6Vmax. )	Surge Current Capacity	Surge Life Test
	Vs	Test Voltage	I <sub>R</sub>	Cj	8/20µs	@8/20µs
	v	v	MΩ	pF	Α	
RLS302-141N	140(126~210)	50	100	1	3000	150A 10 times
RLS302-201M	200±20%	50	100	1	3000	150A 10 times
RLS302-251M	250±20%	100	100	1	3000	150A 10 times
RLS302-301M	300±20%	100	100	1	3000	150A 10 times
RLS302-401M	400±20%	250	100	1	3000	150A 10 times
RLS302-501M	500±20%	250	100	1	3000	150A 10 times
RLS302-601M	600±20%	250	100	1	3000	150A 10 times
RLS302-701M	700±20%	250	100	1	3000	150A 10 times
RLS302-102M	1000±20%	500	100	1	3000	150A 10 times
RLS302-122M	1200±20%	500	100	1	3000	150A 10 times
RLS302-302M	3000±20%	500	100	1	3000	150A 10 times
RLS302-362M	3600±20%	500	100	1	3000	150A 10 times

## **Test Methods And Results**

Test Item	Test Method	Specification	
DC Spark-over Voltage Vs(V)	Add and measure the DC Voltage gradually Maxto get the discharge threshold voltage. The measuring current is 1mA/1 second max.	It depands on each spec.	
Insulation Resistance	Measure the insulation resistance of two end of leadwire under the specified DC voltage.	100MΩ min.	
Capacitance Cj(pF)	Measure the Electrostatic Capacitance under the test condition of 1KHz,DC 6V(max).	1pF max.	
Life(JSE)	Apply a standard impulse voltage (8X20µsec)of 150A for 5 times with intervals of 30 sec., and then change the polarity of the surge and apply a impulse again. Then measure DC spark-over voltage, IR & Capacitance.	DC spark-over voltage JSE:	
Life(JSE)	Apply 10 KV voltage charged in 1500pF condenser and apply the current to the specimen,200 times at 10 seconds of intervals	Insulation Resistance & Capacitance to meet the specified value. Appearance: No cracks or failures.	
Cold Resistance	Measurement after -40 $^\circ\!\!\mathbb{C}$ /1000 HRS & normal temperature/2 HRS.		
Heat Resistance	Measurement after 125 $^\circ\!\!{\rm C}$ /1000 HRS & normal temperature/2 HRS.		
Humidity Resistance	dity Resistance Measurement after humidity 90~95 °C (45 °C ) /1000 HRS & normal temperature/2 HRS.		
Temperature Cycle	10 times repetition of cycle -40 °C /30min →normal, temp/2 min →125°C /30min, measurement after normal temp/2 HRS.		
Pull Strength	ull Strength Apply 0.5kg load for 10sec.		
Flexural Strength Bend lead wire at the point of 2mm from body under 0.25 load and back to its original point. Repeat 1 time.		Lead shall not pull out to snap.	

# **361°**Circuit Protection

Specifications are subject to change without notice. Please refer to http://**www.ruilon.com.cn** for current information.






### **RLS302 Series**

### **Recommended Soldering Conditions**

#### **Flow Soldering Conditions**



#### Hand Soldering

Solder iron temperature:  $350 \pm 5^{\circ}$ C Heating time: 3 seconds max.

#### General attention to soldering

1. High soldering temperatures and long soldering times can cause leaching of the termination, decrease in adherence strength, and the change of characteristic may occur.

2.For soldering, please refer to the soldering curves above. However, please keep exposures to temperatures exceeding  $200^{\circ}$ C to fewer than 50 seconds.

3.Please use a mild flux (containing less than 0.2wt% Cl). Also, if the flux is water soluble, be sure to wash thoroughly to remove any residue from the underside of components that could affect resistance.

1) Time shown in the above figures is measured from the point when chip surface reaches temperature.

2) Temperature difference in high temperature part should be within  $110^{\circ}$ C

3) After soldering, do not force cool, allow the parts to cool gradually.

#### Cleaning


When using ultrasonic cleaning, the board may resonate if the output power is too high. Since this vibration can cause cracking or a decrease in the adherence of the termination, we recommend that you use the conditions below.

Frequency: 40kHz max.

Output power: 20W/liter

Cleaning time: 5 minutes max.

#### **Dimensions**



DIM	Millimeters	Inches	
Α	28±2.0	1.102±0.079	
В	6.7±1.0	0.264±0.039	
С	0.5±0.05	0.02±0.002	
D	Ф3.1±0.5	Ф0.122±0.02	




Specifications are subject to change without notice. Please refer to http://www.ruilon.com.cn for current information.






#### **RLS302 Series**

## **Packaging Information**



Symbol	Millimeters	Inches		
w	52.5±1.5	2.067±0.059		
Р	5.0±0.5	0.197±0.02		
L1-L2	1.0 max	0.039max		
<b>T</b> 6.0±1.0		0.236±0.039		
z	1.2max	0.047max		
t	3.2max	0.126max		
S	0.8max	0.031max		
Α	75.0	2.953		
В	68.0	2.677		
С	255.0	10.039		
Quantity:1500PCS/ inner box				





Specifications are subject to change without notice. Please refer to http://www.ruilon.com.cn for current information.

