

### 16.75 GHz Surface Mount Bandpass Filter



#### **B168MB1S**

#### **DESCRIPTION**

One of DLI's surface mountable catalog bandpass filters. This filter utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature. The catalog BPF's are offered in a variety of frequency bands, which offers a drop in solution with highly repeatable performance.

#### **FEATURES**


- Small Size
- Fully Shielded Component
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

#### **SPECIFICATIONS\***

Parameter	Frequency Range (GHz)	Min	Тур.	Max
Insertion Loss (dB)	15.75 - 17.75	ı	2.5	2.75
Return Loss (dB)		12	15	-
Low Side Rejection (dB)	DC - 13.5	40	45	-
High Side Rejection (dB)	19.25– 24.0	40	45	
Input Power (W)				TBD
Size (L x W x H)	0.350 x 0.200 x 0.098 in 8.9 x 5.0 x 2.5 mm			

\*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary up to ±0.5dB over

# **Typical Measured Performance**

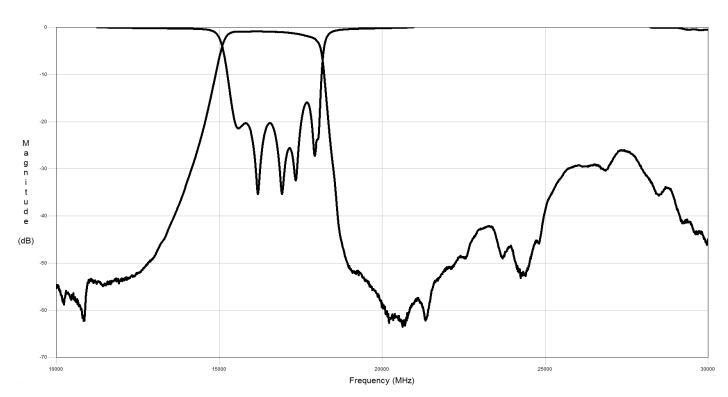

2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710 | KCCSales@knowles.com



# 16.75 GHz Surface Mount Bandpass Filter

# COMPEX • DLI • JOHANSON MFG NOVACAP • SYFER • VOLTRONICS www.knowlescapacitors.com

## **B168MB1S**

# **Physical Dimensions** Units = inches .350±.002 -CATALOG NUMBER B168MB1S -200±.002 $(.196) \cdot$ (.350) -STAINLESS STEEL COVER 83 NOM 98 MAX) CERAMIC FILTER .002 TYP. -R.0055 .0165 R.0105 2X .100 DETAIL A R.027 **Recommended PCB Layout** $50\Omega$ trace dimensions are application specific. Ensure adequate grounding beneath the part.

**Lead Free**