
Hall IC



PT3617 Hi-sensitivity Hall-effect Latch

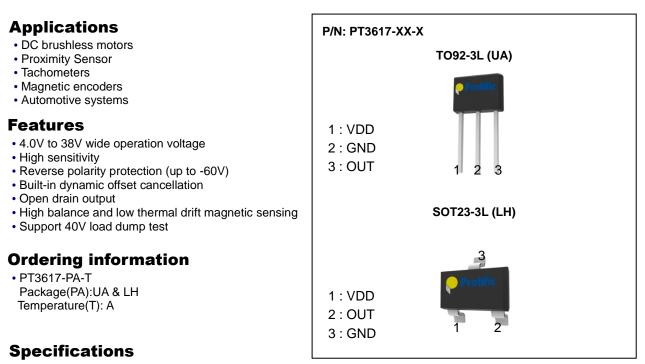

Absolute Maximum Ratings (Ta=25°C)

| Parameter | Symbol | Conditions | Rating | Unit |
|-----------------------------|--------------------|------------|-------------------|------|
| Maximum supply voltage | V _{DDMAX} | | 40 | V |
| Minimum supply voltage | V _{DDMIN} | | -60 | V |
| Allowable power dissipation | P _D | TO-92(UA) | 550 ^{*1} | mW |
| | | SOT-23(LH) | 500 ^{*1} | mW |
| Operating temperature range | T _A | Suffix 'A' | -40~+150 | °C |
| Storage temperature range | Ts | | -65~+150 | °C |
| Relative Humidity | R _H | | 20~90 | % |
| Max. output current | I _{OMAX} | | 50 | mA |

¹: On 50mm x 50mm x 1.6mm glass epoxy board

♦ All PROLIFIC products described or contained herein do not have specifications that can handle applications require extremely high levels of reliability, such as life-support systems, aircraft control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your PROLIFIC representative nearest you before using any PROLIFIC products described or contained herein in such applications.

PROLIFIC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, the rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all PROLIFIC products described or contained herein.

• PROLIFIC TECHNOLOGY INC.

7F, No.48, Sec.3, Nan Kang Rd., Nan Kang, Taipei, 115, Taiwan.








Electrical Characteristics (T_A=+25°C)

| Characteristic | Symbol | Test Condition | Min. | Тур. | Max. | Units |
|--|------------------|--------------------------------|------|------|------|-------|
| Supply Voltage | V _{DD} | | 4.0 | | 38 | V |
| Output Sink Voltage | V _{OL} | @ I _{OUT} =20mA | | 130 | 280 | mV |
| Output Leakage Current | I _{он} | Output switch off | | | 0.1 | uA |
| Output Clamp Voltage | V _{BV} | | | 40 | 42 | V |
| Supply Current | I _{DD} | Output open | | 4 | 6 | mA |
| Magnetic Characteri | stics (T, | _=+25°C, V _{DD} =5V) | | | | |
| Operate Point | B _{OP} | | 10 | 22 | 45 | G |
| Release Point | B _{RP} | | -45 | 22 | -10 | G |
| Hysteresis | B _{HYS} | | 25 | 44 | 62 | G |
| Magnetic Characteri | stics (T, | a=+25°C, V _{DD} =12V) | | | | |
| Operate Point | B _{OP} | | 10 | 22 | 42 | G |
| Release Point | B _{RP} | | -42 | -22 | -10 | G |
| Hysteresis | B _{HYS} | | 28 | 44 | 60 | G |
| Magnetic Characteristics (T _A =-40°C~150°C, V _{DD} =12V) | | | | | | |
| Operate Point | B _{OP} | | 10 | 22 | 50 | G |
| Release Point | B _{RP} | | -50 | -22 | -10 | G |
| Hysteresis | B _{HYS} | | 35 | 44 | 72 | G |

Output Behavior versus Polarity (T_A=-40°C~150°C, V_{DD}=4.0V~38V)

| Parameters | Test Conditions(LH) | Output(LH) | Test Conditions(UA) | Output(UA) |
|------------|--|------------|------------------------------------|------------|
| South pole | B>Bop | Low | B>Bop | Low |
| North pole | B <brp< td=""><td>High</td><td>B<brp< td=""><td>High</td></brp<></td></brp<> | High | B <brp< td=""><td>High</td></brp<> | High |


South Pole






North Pole

South Pole






Output = Low

Output = High SOT-23(LH) Package

Output =Low Output = High TO-92(UA) Package

North Pole





General Specifications

The PT3617 is designed for magnetic actuating using a bipolar magnetic field. The built-in dynamic offset cancellation of pre-amplifier stage achieves optimal symmetrical magnetic sensing. This Hall effect IC is optimal for DC brushless fan application. The supply voltage range is from 4.0V to 38V and the maximum output current is 50mA. The internal protection device could benefit PT3617 to survive up to -32V in reversed battery situation.

This Hall effect sensor IC integrate the sensor, pre-amplifier with dynamic offset cancellation and the hysteresis comparator in single chip. The architecture block diagram is shown in Fig. 1.



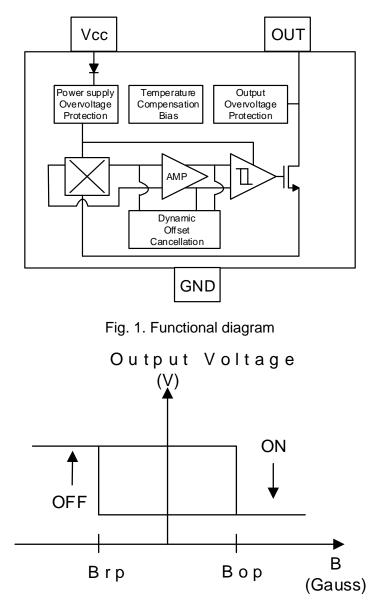



Fig. 2. Output behavior







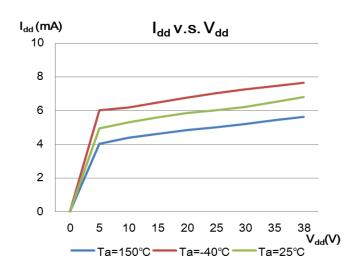

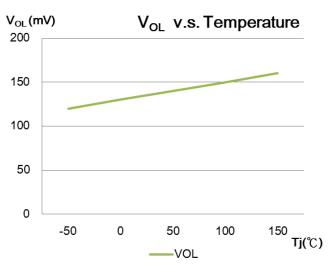

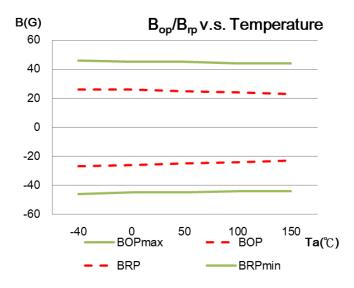

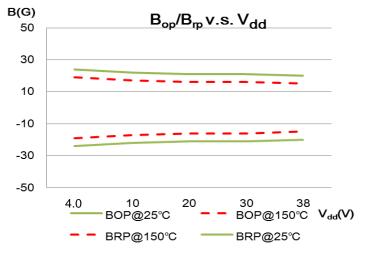

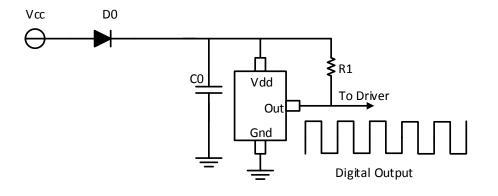

PT3617

NOTE :


- D0: general diode
- C0: decoupling capacitor 0.1uF(recommended)
- R1: 1K~10Kohm (recommended)



Type Package Packing Quantity (EA) Quantity per Box (EA) MOQ TO-92 Box 1000 20000 80000 SOT-23 Reel 3000 12000 168000

Packing dimension

TO-92

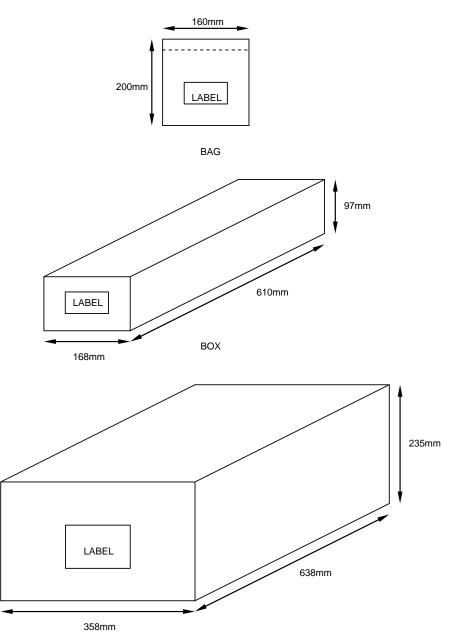


CARTON




Packing dimension

SOT-23

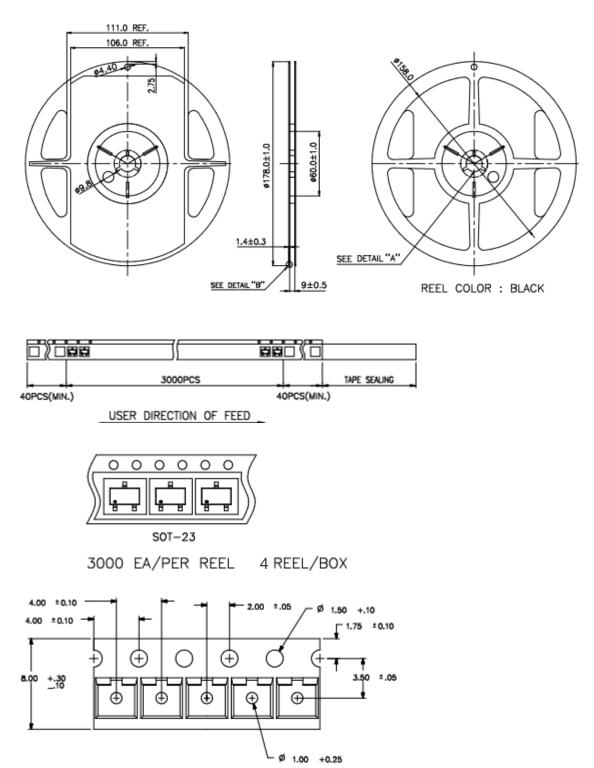



Package Outline TO-92(UA)

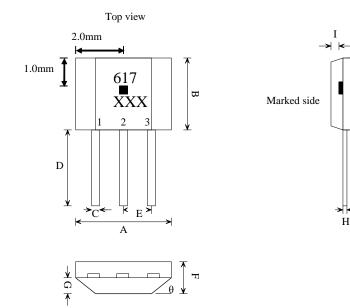


Marking: Part Number : 617 Date Code : X(Year) XX(Week)

1. VDD/DC power supply
 2. GND/DC ground
 3. OUT/output pin

Η


| SYMBOLS | DIMENSIONS IN MILLIMETERS(mm) | | | | |
|-----------|-------------------------------|-------|-------|--|--|
| 51 WIDULS | MIN | NOM | MAX | | |
| А | 3.90 | 4.00 | 4.10 | | |
| В | 2.80 | 2.90 | 3.00 | | |
| С | 0.38 | 0.42 | 0.47 | | |
| D | 14.30 | 14.50 | 14.70 | | |
| Е | 1.25 | 1.28 | 1.31 | | |
| F | 1.40 | 1.50 | 1.60 | | |
| G | 0.67 | 0.72 | 0.77 | | |
| Н | 0.33 | 0.38 | 0.43 | | |
| Ι | 0.38 | 0.45 | 0.52 | | |
| θ | | 45° | | | |


Prolific Package Outline SOT-23(LH)

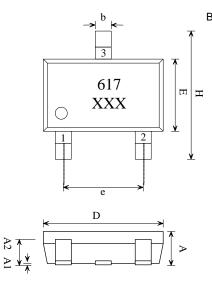

Marking: Part Number : 617 Date Code : X(Year) XX(Week)

Sensor Location





1. VDD/DC power supply
 2. OUT/output pin
 3. GND/DC ground

| SYMBOLS | DIMENSIONS IN MILLIMETERS(mm) | | | | |
|----------|-------------------------------|------|------|--|--|
| 51 MBOLS | MIN | NOM | MAX | | |
| А | 1.10 | 1.20 | 1.30 | | |
| A1 | 0.11 | 0.12 | 0.13 | | |
| A2 | 1.05 | 1.10 | 1.15 | | |
| b | 0.35 | 0.40 | 0.45 | | |
| С | 0.15 | 0.20 | 0.25 | | |
| D | 2.90 | 3.00 | 3.10 | | |
| E | 1.50 | 1.60 | 1.70 | | |
| F | 0.35 | 0.40 | 0.45 | | |
| Н | 2.70 | 2.80 | 2.90 | | |
| е | 1.80 | 1.90 | 2.00 | | |
| L | 0.35 | 0.40 | 0.45 | | |




Thermal resistance

TO92-3L

| Parameter | Symbol | Conditions | Rating | Units |
|--|----------------|------------|-------------------|-------|
| Allowable power dissipation | P _d | | 550 ^{*1} | mW |
| Junction to ambient thermal resistance | θ_{JA} | | 255 | °C/W |
| Junction to case thermal resistance | θ_{JC} | | 90 | °C/W |
| Maximum junction temperature | TJ | | 165 | °C |

*1: Reduced by 14.3mW for each increase in Ta of 1°C over 25°C When mounted on 50mm x 50mm x 1.6mm glass epoxy board

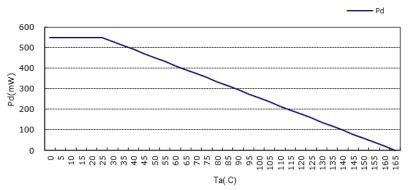


Pd versus Ambient temperature

SOT-23

| Parameter | Symbol | Conditions | Rating | Units |
|--|----------------|------------|-------------------|-------|
| Allowable power dissipation | P _d | | 500 ^{*1} | mW |
| Junction to ambient thermal resistance | θ_{JA} | | 280 | °C/W |
| Junction to case thermal resistance | θ_{JC} | | 110 | °C/W |
| Maximum junction temperature | TJ | | 165 | °C |

*1: Reduced by 14.3mW for each increase in Ta of 1°C over 25°C When mounted on 50mm x 50mm x 1.6mm glass epoxy board



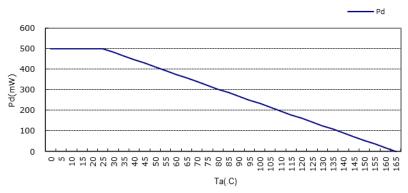



| Part Number | Temperature | Package Type | Package Qty | Prolific Type Code |
|-------------|--------------|--------------|--------------|--------------------|
| | Range | | | |
| PT3617UAA | -40°C~+150°C | TO92-3L | 1000pcs/Bulk | PT3617E1OAG7D2 |
| PT3617LHA | -40°C~+150°C | SOT23-3L | 3000pcs/Reel | PT3617E1SAG8D2 |

- Specifications of any and all PROLIFIC products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- PROLIFIC Technology Inc. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any and all PROLIFIC products described or contained herein fall under strategic products (including services) controlled under the Foreign Exchange and Foreign Trade Control Law of Taiwan, such products must not be exported with our obtaining export license from the Ministry of international Trade and Industry in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of PROLIFIC Technology Inc.
- Any and all information described or contained herein are subject to change without notice due to
 product/technology improvement, etc. When designing equipment, refer to the Delivery Specification for
 the PROLIFIC product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. PROLIFIC believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

Specifications and information herein are subject to change without notice.