

PS11103A High Linearity SP3T RF Switch

GENERAL DESCRIPTION

The PS11103A is a single-pole/triple-throw (SP3T) antenna switch, which supports from 0.1GHz to 3GHz. The device features low insertion loss and high isolation, which make it suitable for high linearity receiving application. It also has the advantage of high linearity performance. The PS11103A is not subject to cellular interference and is applied to multi-mode and multi-band LTE mobile phones.

The PS11103A has the ability to integrate SP3T RF switch and GPIO controller on a SOI chip. Internal driver and decoder for switch control signals are offered by the GPIO controller, which makes it flexible in RF path band and routing selection.

No external DC blocking capacitors required on the RF paths as long as no external DC voltage is applied, which can save PCB area and cost.

The PS11103A is available in a Green UTQFN -1.1×1.1-9L package.

APPLICATIONS

2G/3G/4G Receiving

FEATURES

- Supply Voltage Range: 2.4V to 3V
- **GPIO Controller**
- Operating Frequency Range: 0.1GHz to 3GHz
- Low Insertion Loss: 0.5dB (TYP) at 2.7GHz
- High Isolation: 20dB (MIN) at 2.7GHz
- Advanced Silicon-On-Insulator (SOI) Process
- No External DC Blocking Capacitors Required
- Available in a Green UTDFN-1.1×1.1-9L package

BLOCK DIAGRAM

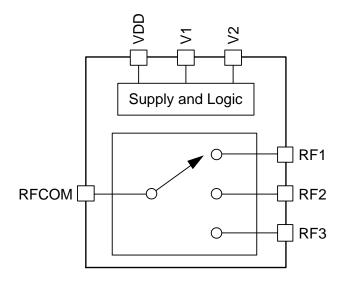


Figure 1. PS11103A Block Diagram

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION	
PS11103A	UTQFN-1.1×1.1-9L	-40°C to +85°C	PS11103AYURK9G/TR	E6	Tape and Reel, 5000	

MARKING INFORMATION

NOTE: Fixed character for E6.



Green (RoHS & HSF): PS Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your PSMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V _{DD}	3.3V
Control Voltage (V1, V2 Pins), VCTL	3V
RF Input Power, PIN	27dBm
Junction Temperature	+150°C
Storage Temperature Range	-55°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility	
HBM	1000V

RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range	40°C to +85°C
Operating Frequency Range	0.1GHz to 3GHz
Supply Voltage, V _{DD}	2.4V to 3V
Control High Voltage, VCTL_H	1.35V to 3V
Control Low Voltage, VCTL L	0V to 0.40V

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. PSMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

PS Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

(TOP VIEW)



UTQFN-1.1×1.1-9L

PIN DESCRIPTION

PIN	NAME	FUNCTION
1	V1	DC Control Voltage 1
2	RF2	RF Port 2.
3	RF1	RF Port 1.
4	RFCOM	RF Common Port.
5	RF3	RF Port 3.
6, 9	GND	Ground.
7	VDD	DC Power Supply.
8	V2	DC Control Voltage 2.

LOGIC TRUTH TABLE

VDD	V1	V2	ACTIVE PATH
Н	Н	L	RFCOM to RF1
Н	Н	Н	RFCOM to RF2
Н	L	Н	RFCOM to RF3
Н	L	L	Isolation

ELECTRICAL CHARACTERISTICS

 $(V_{DD}=2.4V \ to \ 3V, \ T_{A}=+25^{\circ}C, \ P_{IN}=0 dBm, \ 50\Omega, \ typical \ values \ are \ at \ V_{DD}=2.8V, \ unless \ otherwise \ noted.)$

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	
DC Specifications						1	
Supply Voltage	V_{DD}			2.8	3	V	
Supply Current	I _{DD}			32	65	μA	
0 1 1 1 1	V _{CTL_H}	High	1.35	1.8	3	V	
Control Voltage	V _{CTL_L}	Low	0		0.4	V	
Control Current	I _{CTL}	V _{CTL} = 0V		3	7	μA	
Switching Time	t _{SW}	50% of control voltage to 90% of RF power		1	2	μs	
Turn-On Time	t _{ON}	Time from V _{DD} = 0V to part on and RF at 90%		5	10	μs	
RF Specifications							
		0.1GHz to 1.0GHz		0.30	0.42		
nsertion Loss RFCOM to All RF Ports)	IL	1.0GHz to 2.0GHz		0.40	0.62	dB	
(2.0GHz to 2.7GHz		0.50	0.72	<u>]</u>	
		0.1GHz to 1.0GHz	30	35			
Isolation (RFCOM to All RF Ports)	ISO	1.0GHz to 2.0GHz	24	30		dB	
(2.0GHz to 2.7GHz	20	25			
		0.1GHz to 1.0GHz		25			
Input Return Loss (RFCOM to All RF Ports)	RL	1.0GHz to 2.0GHz		24		dB	
(tti oom to / iii tti i oito)		2.0GHz to 2.7GHz	23				
0.1dB Compression Point (RFCOM to All RF Ports)	P _{0.1dB}	0.1GHz to 3GHz		27		dBm	
2 nd Harmonics	2f ₀	P _{IN} = 26dBm, 0.1GHz to 3GHz		85		dBc	
3 rd Harmonics	3f ₀	P _{IN} = 26dBm, 0.1GHz to 3GHz		75		dBc	

TYPICAL APPLICATION CIRCUIT

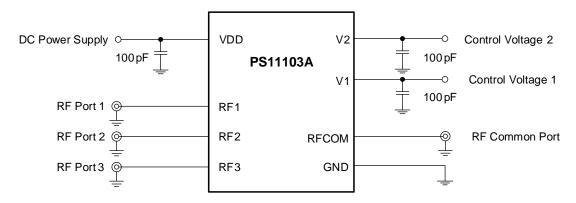


Figure 2. PS11103A Typical Application Circuit

EVALUATION BOARD LAYOUT


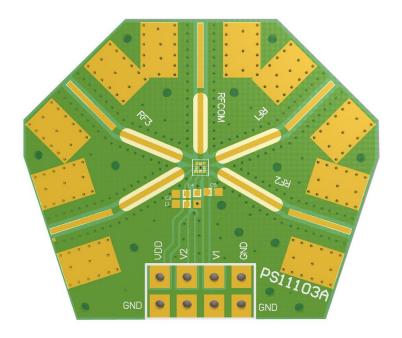


Figure 3. PS11103A Evaluation Board Layout

PACKAGE OUTLINE DIMENSIONS UTQFN-1.1×1.1-9L

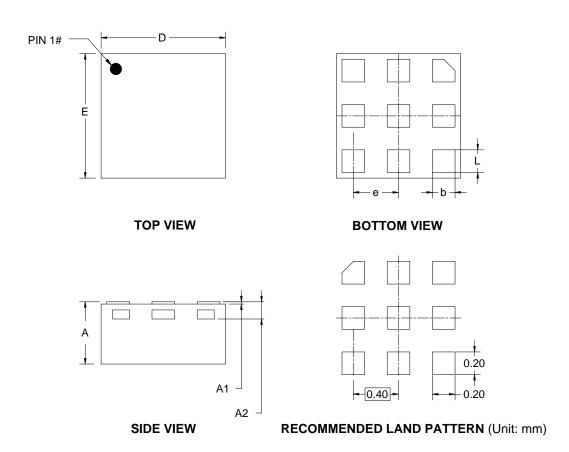


Comple ed	Dimensions In Millimeters					
Symbol	MIN	MOD	MAX			
А	0.500	0.500 0.550				
A1	0.000	0.000 0.020				
A2						
D	1.000 1.100 1.000 1.100		1.200			
Е			1.200			
b	0.150	0.150 0.200 0.350 0.400				
е	0.350					
L	0.150 0.200		0.250			


NOTE: This drawing is subject to change without notice.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

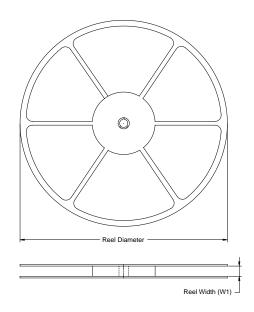

TAPE DIMENSIONS

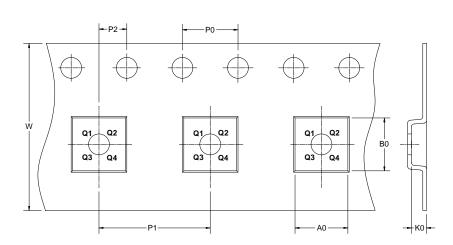




NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
UTQFN-1.1×1.1-9L	7"	9.5	1.30	1.30	0.69	4.0	4.0	2.0	8.0	Q2

CARTON BOX DIMENSIONS

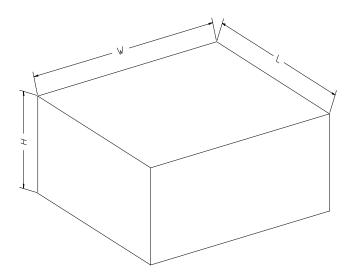

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton	
7" (Option)	368	227	224	8	
7"	442	410	224	18	20000

PS11103A



For the latest specifications or product information:

Website: www.ps-micro.com.cn

Phone: 86-21-50772230

Email: info@ps-micro.com.cn

THE INFORMATION CONTAINED HEREIN IS BELIEVED TO BE RELIABLE. PSMICRO MAKES NO WARRANTIES REGARDING INFORMATION CONTAINED HEREIN. PSMICRO ASSUMES NO RESPONSIBILITIES OR LIABILITIES FOR THE USE OF THE INFORMATION CONTAINED HEREIN. THE INFORMATION CONTAINED HEREIN IS PROVIDED "AS IS, WHERE IS", AND THE ENTIRE RISK ASSOCIATED WITH SUCH INFORMATION IS ENTIRELY WITH THE USER. ALL INFORMATION CONTAINED HEREIN IS SUBJECT TO CHANGE WITHOUT NOTICE. THE INFORMATION CONTAINED HEREIN OR ANY USE OF SUCH INFORMATION DOES NOT GRANT, EXPLICITLY OR IMPLICITLY TO ANY PARTY ANY PATENT RIGHTS, LICENSES, OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS, WHETHER WITH REGARD TO SUCH INFORMATION ITSELF OR ANYTHING DESCRIBED BY SUCH INFORMATION.

PSMICRO products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2021, 2022 © PS Micro Corp | All rights reserved | Weedspread is a registered trademark of PS Micro Corp