

GENERAL DESCRIPTION

The PS11108A is a single-pole/eight-throw (SP8T) antenna switch, which supports from 0.1GHz to 3GHz. The device features low insertion loss and high isolation, which make it suitable for 2G/3G/4G transmitting/receiving (TRx) applications. It also has the advantage of high linearity performance. The PS11108A is not subject to cellular interference and is applied to multi-mode and multi-band LTE mobile phones.

The PS11108A has the ability to integrate SP8T RF switch and GPIO controller on a SOI chip. Internal driver and decoder for switch control signals are offered by the GPIO controller, which makes it flexible in RF path band and routing selection.

No external DC blocking capacitors required on the RF paths as long as no external DC voltage is applied, which can save PCB area and cost.

The PS11108A is available in a Green UTQFN-2x2-14L package.

APPLICATIONS

2G/3G/4G Antenna Diversity
Pre-PA Switching and Receiving Band Switching

FEATURES

- **Supply Voltage Range: 2.4V to 3.4V**
- **GPIO Controller**
- **Low Insertion Loss: 0.6dB (TYP) at 2.7GHz**
- **Operating Frequency Range: 0.1GHz to 3GHz**
- **High Isolation: 20dB (MIN) at 2.7GHz**
- **Advanced Silicon-On-Insulator (SOI) Process**
- **No External DC Blocking Capacitors Required**
- **Available in a Green UTQFN-2x2-14L Package**

BLOCK DIAGRAM

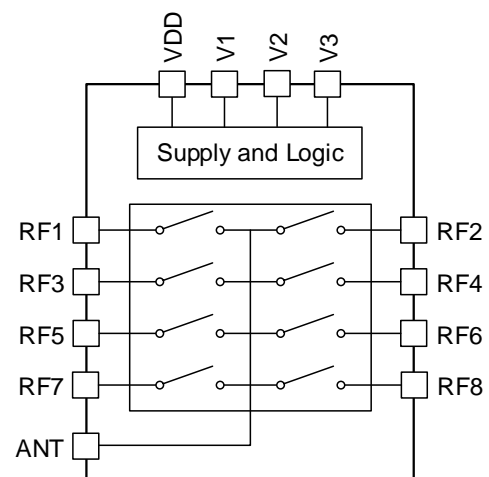



Figure 1. PS11108A Block Diagram

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
PS11108A	UTQFN-2x2-14L	-40°C to +85°C	PS11108AYURB14G/TR	R44 XXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XXXX = Date Code and Trace Code.



Green (RoHS & HSF): PS Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your PSMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

- Supply Voltage, V_{DD}3.6V
- Control Voltage (V1, V2 and V3 Pins), V_{CTL} 3.6V
- RF Input Power, P_{IN}30dBm
- Junction Temperature.....+150°C
- Storage Temperature Range.....-55°C to +150°C
- Lead Temperature (Soldering, 10s).....+260°C

RECOMMENDED OPERATING CONDITIONS

- Operating Temperature Range.....-40°C to +85°C
- Operating Frequency Range.....0.1GHz to 3GHz
- Supply Voltage, V_{DD}2.4V to 3.4V
- Control High Voltage, V_{CTL_H}1.3V to 3.4V
- Control Low Voltage, V_{CTL_L}0.4V

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. PSMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

PS Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

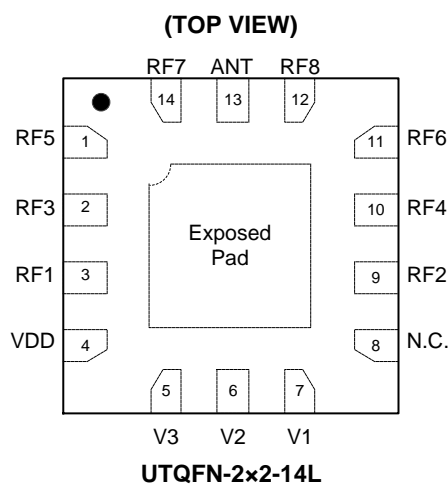

PIN DESCRIPTION

PIN	NAME	FUNCTION
1	RF5	RF I/O Port 5.
2	RF3	RF I/O Port 3.
3	RF1	RF I/O Port 1.
4	VDD	DC Power Supply.
5	V3	DC Control Voltage 3.
6	V2	DC Control Voltage 2.
7	V1	DC Control Voltage 1.
8	N.C.	Not Connected.
9	RF2	RF I/O Port 2.
10	RF4	RF I/O Port 4.
11	RF6	RF I/O Port 6.
12	RF8	RF I/O Port 8.
13	ANT	Antenna Port.
14	RF7	RF I/O Port 7.
Exposed Pad	GND	Ground. Exposed pad must be connected to ground.

LOGIC TRUTH TABLE

CONTROL PINS			SWITCHED RF PATHS							
V1	V2	V3	RF1	RF2	RF3	RF4	RF5	RF6	RF7	RF8
0	0	0	Insertion Loss	Isolation	Isolation	Isolation	Isolation	Isolation	Isolation	Isolation
0	0	1	Isolation	Insertion Loss	Isolation	Isolation	Isolation	Isolation	Isolation	Isolation
0	1	0	Isolation	Isolation	Insertion Loss	Isolation	Isolation	Isolation	Isolation	Isolation
0	1	1	Isolation	Isolation	Isolation	Insertion Loss	Isolation	Isolation	Isolation	Isolation
1	0	0	Isolation	Isolation	Isolation	Isolation	Insertion Loss	Isolation	Isolation	Isolation
1	0	1	Isolation	Isolation	Isolation	Isolation	Isolation	Insertion Loss	Isolation	Isolation
1	1	0	Isolation	Isolation	Isolation	Isolation	Isolation	Isolation	Insertion Loss	Isolation
1	1	1	Isolation	Isolation	Isolation	Isolation	Isolation	Isolation	Isolation	Insertion Loss

ELECTRICAL CHARACTERISTICS

($V_{DD} = 2.4V$ to $3.4V$, $T_A = +25^\circ C$, $P_{IN} = 0dBm$, 50Ω , Typical values are at $V_{DD} = 2.8V$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Specifications						
Supply Voltage	V_{DD}		2.4	2.8	3.4	V
Supply Current	I_{DD}			40	95	μA
Control Voltage	V_{CTL_H}	High	1.3	1.8	3.4	V
	V_{CTL_L}	Low	0		0.4	
Control Current	I_{CTL}	$V_{CTL} = 0V$		3	6	μA
Switching Time	t_{SW}	50% of control voltage to 90% of RF power		0.5	2	μs
Turn-On Time	t_{ON}	Time from $V_{DD} = 0V$ to part ON and RF at 90%		5		μs
RF Specifications						
Insertion Loss (ANT to All RF Ports)	IL	0.1GHz to 1.0GHz		0.35	0.97	dB
		1.0GHz to 2.0GHz		0.45	1.33	
		2.0GHz to 2.7GHz		0.60	1.45	
Isolation (ANT to All RF Ports)	ISO	0.1GHz to 1.0GHz	23	37		dB
		1.0GHz to 2.0GHz	19	30		
		2.0GHz to 2.7GHz	18	25		
Input Return Loss (ANT to All RF Ports)	RL	0.1GHz to 1.0GHz		30		dB
		1.0GHz to 2.0GHz		22		
		2.0GHz to 2.7GHz		20		
0.1dB Compression Point (ANT to All RF Ports)	$P_{0.1dB}$	0.1GHz to 3GHz		30		dBm
2 nd Harmonics	$2f_0$	$P_{IN} = 26dBm$, 0.1GHz to 3GHz		85		dBc
3 rd Harmonics	$3f_0$	$P_{IN} = 26dBm$, 0.1GHz to 3GHz		80		dBc

TYPICAL APPLICATION CIRCUIT

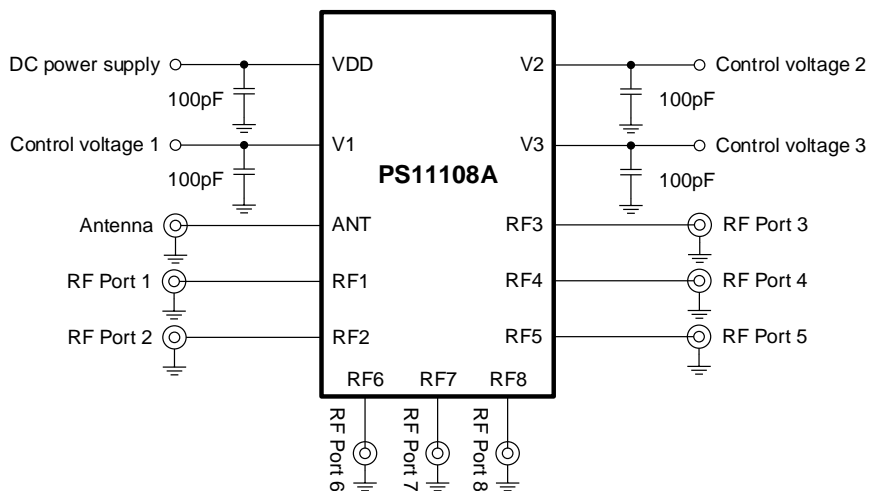


Figure 2. PS11108A Typical Application Circuit


EVALUATION BOARD LAYOUT




Figure 3. PS11108A Evaluation Board Layout

PACKAGE OUTLINE DIMENSIONS


UTQFN-2x2-14L




TOP VIEW



BOTTOM VIEW



SIDE VIEW




RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.50	0.55	0.60
A1	0.00	0.02	0.05
A2	0.15 REF		
b	0.13	0.18	0.23
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D1	0.90	1.00	1.10
E1	0.90	1.00	1.10
e	0.40	0.45	0.50
e1	0.35	0.40	0.45
k	0.15	-	-
L	0.185	0.235	0.285
L1	0.118 REF		
R	0.125 REF		
R1	0.075	-	-

TAPE AND REEL INFORMATION

REEL DIMENSIONS

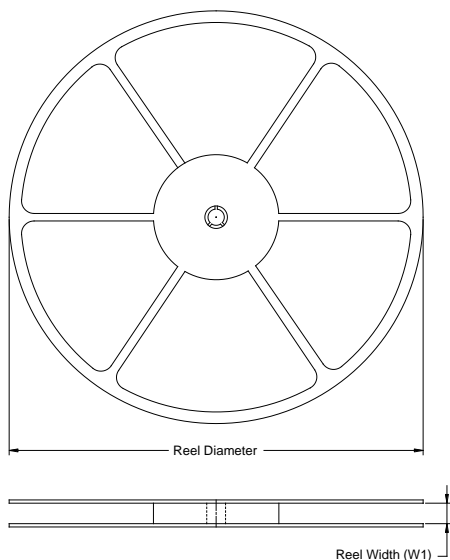

TAPE DIMENSIONS

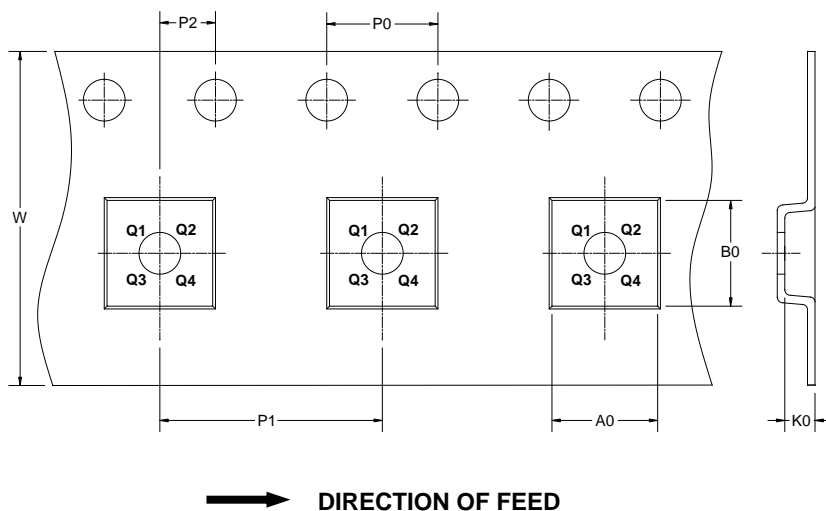


NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
UTQFN-2x2-14L	7"	9.5	2.25	2.25	0.75	4.0	4.0	2.0	8.0	Q2

DD0001

CARTON BOX DIMENSIONS

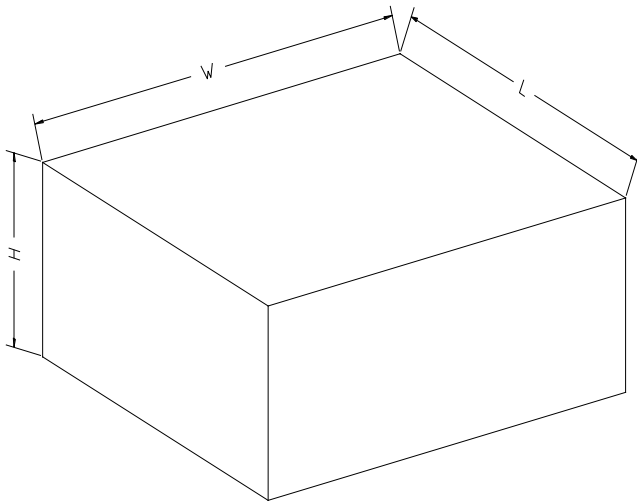

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002



For the latest specifications or product information:

Website: www.ps-micro.com.cn

Phone: 86-21-50772230

Email: info@ps-micro.com.cn

THE INFORMATION CONTAINED HEREIN IS BELIEVED TO BE RELIABLE. PSMICRO MAKES NO WARRANTIES REGARDING INFORMATION CONTAINED HEREIN. PSMICRO ASSUMES NO RESPONSIBILITIES OR LIABILITIES FOR THE USE OF THE INFORMATION CONTAINED HEREIN. THE INFORMATION CONTAINED HEREIN IS PROVIDED "AS IS, WHERE IS", AND THE ENTIRE RISK ASSOCIATED WITH SUCH INFORMATION IS ENTIRELY WITH THE USER. ALL INFORMATION CONTAINED HEREIN IS SUBJECT TO CHANGE WITHOUT NOTICE. THE INFORMATION CONTAINED HEREIN OR ANY USE OF SUCH INFORMATION DOES NOT GRANT, EXPLICITLY OR IMPLICITLY TO ANY PARTY ANY PATENT RIGHTS, LICENSES, OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS, WHETHER WITH REGARD TO SUCH INFORMATION ITSELF OR ANYTHING DESCRIBED BY SUCH INFORMATION.

PSMICRO products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2020, 2021, 2022 © PS Micro Corp | All rights reserved | Weedspread is a registered trademark of PS Micro Corp