


3.81, 5.08, 5.4 mm pitch/Disconnectable Crimp style connectors(Wire-to-board/Wire-to-wire)

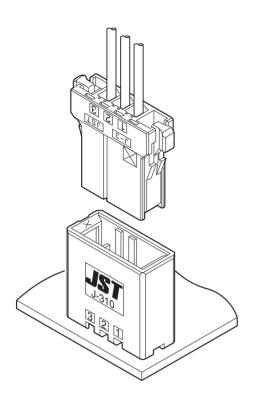

Connectors for signal circuit or power supply circuit, applicable to the factory automation, heavy electric machinery, and other industrial equipment in general.

In spite of the various kinds of housings available, their contacts are designed to be common.

The applicable tooling can be standardized.

- Double-spring construction
- Housing lances
- · Clear click feeling

Specifications ———

· Current rating : AC/DC

Unit: A

| | _ | | | | | | | | |
|----------|-------|-----------------|-------|------|------|------|------|------|--|
| No. of | | Wire size (AWG) | | | | | | | |
| circuits | #14 | #16 | #18 | #20 | #22 | #24 | #26 | #28 | |
| 1 | 15.0 | 14.0 | 11.5 | 9.5 | 8.0 | 6.5 | 5.75 | 4.75 | |
| 2 | 13.5 | 13.5 | 11.25 | 9.25 | 7.5 | 6.25 | 5.5 | 4.5 | |
| 3 | 12.25 | 12.25 | 10.5 | 8.5 | 7.0 | 5.75 | 5.0 | 4.1 | |
| 4 | 11.25 | 11.25 | 10.0 | 8.0 | 6.5 | 5.5 | 4.75 | 4.0 | |
| 5 | 10.5 | 10.5 | 9.5 | 7.5 | 6.25 | 5.25 | 4.5 | 4.0 | |
| 6 | 9.75 | 9.75 | 9.0 | 7.0 | 6.0 | 5.0 | 4.25 | 3.75 | |
| 8 | 9.0 | 9.0 | 8.25 | 6.5 | 5.5 | 4.5 | 3.75 | 3.25 | |
| 9 | 8.5 | 8.5 | 8.0 | 6.25 | 5.25 | 4.5 | 3.75 | 3.25 | |
| 10 | 8.5 | 8.5 | 8.0 | 6.25 | 5.25 | 4.5 | 3.75 | 3.25 | |
| 12 | 8.25 | 8.25 | 7.75 | 6.0 | 5.0 | 4.0 | 3.5 | 3.0 | |
| 16 | 8.0 | 8.0 | 7.5 | 6.0 | 4.75 | 4.0 | 3.5 | 3.0 | |
| 20 | 8.0 | 8.0 | 7.25 | 6.0 | 4.5 | 4.0 | 3.5 | 2.75 | |
| 40 | 7.5 | 7.5 | 6.25 | 5.25 | 4.0 | 3.5 | 3.0 | 2.5 | |

- · Voltage rating: J310/J340/J380 series (3.81 mm pitch) 250 V AC/DC J320/J350 series (5.08 mm pitch) 600 V AC/DC
- · Temperature range: -55°C to + 105°C

(including temperature rise in applying electrical current)

Contact resistance: Initial value/ 5 mΩ max.

After environmental tests/ 10 mΩ max.

- · Insulation resistance: 1,000 m Ω min.
- · Withstanding voltage:

J310/J340/J380 series (3.81 mm pitch) 1,500 VAC/minute J320/J350 series (5.08 mm pitch) 2,200 VAC/minute

- · Applicable wire: AWG #28 to #14
- Applicable PC board thickness: 1.6 to 2.4 mm
- * Refer to the page of each product for the specifications of the J330 series and common type (J350D, J360T).
- In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).
- * Dimensional unit: mm
- * RoHS2 Compliance
- * Contact JST for details.

Standards –


Recognized E60389

△ :R50133261

| J300 series | products line-u | р | | | | | |
|-------------------------------------------------------------|----------------------------------|-------------------|---------------------------------------|---------------------|-----------------------------------------|--|--|
| | | 3.81 mm pi | itch , Voltage rating 25 | 0 V AC/DC | | | |
| Туре | Wire-to | | , , , , , , , , , , , , , , , , , , , | Wire-to-wire | | | |
| | Top entry type Side entry type F | | Free hanging type | Panel mou | inting type | | |
| J310S Single-row type | | | | Screw type | Housing lock type | | |
| No. of circuits | 3, 4, 5, 6, 8,10 | 3, 4, 5, 6, 8,10 | 3, 4, 5, 8,10 | 3, 4, 5, 8,10 | | | |
| J310D Dual-row type [Line pitch 5.08 mm] | | | | | | | |
| No. of circuits | 6, 8,10,12,16, 20 | 6, 8,10,12,16, 20 | 6, 8,10,12,16, 20 | 6, 8,10,12,16, 20 | 6,12, 20 | | |
| J310M Dual-row module type [Line pitch 7.62 mm] | | | | | | | |
| No. of circuits | 6 | 6 | | | | | |
| J340F Four-row type [Line pitch 5.08 mm] | | | | | | | |
| No. of circuits | | 12, 20 | | | | | |
| J380 Dual-row type [Line pitch | | | Туре | Wire-t Panel mou | e rating 600 V AC/DC o-wire unting type | | |
| 5.08 mm] (Thin type) No. of circuits | 40 | 20, 40 | J330 [Line pitch 7.7 mm] | Screw type | Housing lock type | | |
| | | | No. of circuits | 30, 40 | | | |

| J300 series | oroducts line-up |) | | | | |
|---------------------------------------------------------------|------------------|---------------------|---------------------|--------------|-----------------------|-------------------|
| | | 5.08 mm pi | tch , Voltag | e rating 600 | 0 V AC/DC | |
| Туре | | o-board | | | Wire-to-wire | |
| | Top entry type | Side entry type | Free han | ging type | Panel mou | inting type |
| J320S Single-row type | | | | | Screw type | Housing lock type |
| No. of circuits | 2, 3, 4, 5, 6 | 2, 3, 4, 5, 6 | 1, 2, | 3, 4 | 1, 2, 3, 4 | 4 |
| J350D Dual-row type [Line pitch 5.08 mm] | ARABARARARA AN | | | | | |
| No. of circuits | 12, 20 | 4,12, 20 | 1: | 2 12 | | |
| J320M Dual-row module type [Line pitch 7.62 mm] | | | | | | |
| No. of circuits | 6,10,12 | 6, 8,10,12 | 6,- | 2 | 6,12, 20 | |
| J320T Triple-row module type [Line pitch 7.62 mm] | | | | | | |
| No. of circuits | | 9 | | | | |
| | Dual-row | common type (J350D) | | | Triple-row common typ | e (J360T) |
| Common type | | | (Line pitch 6.5 mm) | | | |
| No. of circuits | | 12 | | | 9,18, 24 | |

Receptacle contact

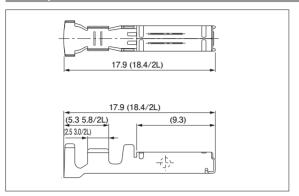

| Model No. | | | pplicable | Insulation O.D. | Q'ty | | |
|--------------------|--------------------|------|-----------------|-----------------|---------|-------|-------------------|
| Strip contact | Loose piece | Size | mm ² | AWG# | (mm) | reel | box (Loose piece) |
| SF3F-002 (*) -P2.0 | BF3F-002 (*) -P2.0 | S | 0.08~0.20 | 28~24 | 0.8~1.4 | 3,700 | 1,000 |
| SF3F-01 (*) -P2.0 | BF3F-01 (*) -P2.0 | М | 0.20~0.50 | 24~20 | 1.2~2.6 | 3,700 | 1,000 |
| SF3F-41 (*) -P2.0 | LF3F-41 (*) -P2.0 | L | 0.50~1.25 | 20~16 | 1.8~2.8 | 3,200 | 1,000 |
| SF3F-71 (*) -P2.0 | BF3F-71 (*) -P2.0 | 2L | 1.25~2.0 | 16~14 | 2.4~3.4 | 3,200 | 1,000 |

Material and Finish

Copper alloy (superior conductivity), nickel-undercoated, selective gold-plated tin-plated (reflow treatment)


RoHS2 compliance
Note: Finish (*): GF.....Nickel-undercoated, 0.38 μm selective gold-plated

GFA...Nickel-undercoated, 0.38 μ m selective gold-plated (A type)

GI......Nickel-undercoated, $0.76\,\mu m$ selective gold-plated GIA.....Nickel-undercoated, $0.76\,\mu m$ selective gold-plated (A type)

..Tin-plated (reflow treatment)

Tab contact

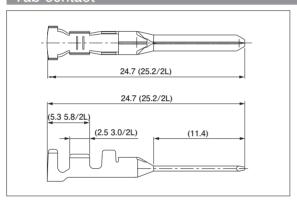

| Model No. | | | pplicable | Insulation O.D. | | Q'ty | |
|---------------------|---------------------|------|-----------------|-----------------|---------|-------|-------------------|
| Strip contact | Loose piece | Size | mm ² | AWG# | (mm) | reel | box (Loose piece) |
| SF3M-002 (*) -M2.0N | BF3M-002 (*) -M2.0N | S | 0.08~0.20 | 28~24 | 0.8~1.4 | 3,500 | 1,000 |
| SF3M-01 (*) -M2.0N | BF3M-01 (*) -M2.0N | М | 0.20~0.50 | 24~20 | 1.2~2.6 | 3,500 | 1,000 |
| SF3M-41 (*) -M2.0N | LF3M-41 (*) -M2.0N | L | 0.50~1.25 | 20~16 | 1.8~2.8 | 3,300 | 1,000 |
| SF3M-71 (*) -M2.0N | BF3M-71 (*) -M2.0N | 2L | 1.25~2.0 | 16~14 | 2.4~3.4 | 3,200 | 1,000 |

Material and Finish

Copper alloy (superior conductivity), nickel-undercoated, selective gold-plated tin-plated (reflow treatment)

RoHS2 compliance

Note: 1. Finish (*):GF...Nickel-undercoated, 0.38 µm selective gold-plated

GI....Nickel-undercoated, 0.76 µm selective gold-plated ..Tin-plated (reflow treatment)

Crimping machine, Applicator

| Strip contact | Crimping | | Applicator | r | Hand tools | |
|---------------------|----------|------------------|------------------------|----------------------------|------------|--|
| Model No. | machine | Crimp applicator | Dies | Crimp applicator with dies | | |
| SF3F-002 (*) -P2.0 | | | MK / SE3E / M 002 20 | APLMK SF3F/M002-20 | YRK-8821 | |
| SF3M-002 (*) -M2.0N | | | WIK/ 31 31 / WI-002-20 | AI LIWIN OI OI 7 WIOOZ-ZO | 1 HK-002 I | |
| SF3F-01 (*) -P2.0 | | | MK / SESE / M 01 30 | APLMK SF3F/M01-20 | VDV 0011 | |
| SF3M-01 (*) -M2.0N | AP-K2N | MKS-L | WIK/ 3F3F/ WI-01-20 | AI LIVIN 31 31 7 W01-20 | 1 HK-0011 | |
| SF3F-41 (*) -P2.0 | AF-NZIN | WING-L | MK / SE3E / M //1 20 | APLMK SF3F/M41-20 | VDK 9901 | |
| SF3M-41 (*) -M2.0N | | | WIK/ 31 31 / WI-41-20 | AF LIVIN 31 31 / IVI41-20 | 1 HK-0001 | |
| SF3F-71 (*) -P2.0 | | | MK / SESE / M 71 20 | APLMK SF3F/M71-20 | VDK 1071 | |
| SF3M-71 (*) -M2.0N | | | WIR/ 31 31 / WI-/ 1-20 | AFLIVIN SI SE/ IVI/ 1-20 | 1 mm-10/1 | |

| Loose piece | Tianu tools |
|---------------------|-------------|
| BF3F-002 (*) -P2.0 | YRF-882 |
| BF3M-002 (*) -M2.0N | THI -002 |
| BF3F-01 (*) -P2.0 | YRF-881 |
| BF3M-01 (*) -M2.0N | THI -001 |
| LF3F-41 (*) -P2.0 | YRF-880 |
| LF3M-41 (*) -M2.0N | 1 HI -000 |
| BF3F-71 (*) -P2.0 | YRF-1070 |
| BF3M-71 (*) -M2.0N | YRF-1071 |
| | |

Note: Finish (*): GF.....Nickel-undercoated, 0.38 μ m selective gold-plated

GFA...Nickel-undercoated, 0.38 μm selective gold-plated (A type)

GINickel-undercoated, 0.76 µm selective gold-plated

GIANickel-undercoated, 0.76 μ m selective gold-plated (A type)

...Tin-plated (reflow treatment)

Note: Finish (*) : $\,$ GFNickel-undercoated, $0.38\,\mu\mathrm{m}$ selective gold-plated

GFA...Nickel-undercoated, 0.38 µm selective gold-plated (A type) GINickel-undercoated, 0.76 µm selective gold-plated GIA....Nickel-undercoated, 0.76 µm selective gold-plated (A type)

T......Tin-plated (reflow treatment) · Extraction tool for J300 series: EJ-JFAJ3

Special extraction tool for J300 series: For receptacle only ...EJ-JFAJ3R, For tab only ...EJ-JFAJ3T
 Refer to the page of "Crimping tools" for details of YRK series hand crimping tools that uses a strip contact.

Recognition mark

· Plating of the contact

Each contact has a marking on its side so that the type or thickness of the plating is recognized.

2 ... gold-plated 0.38 μ m thickness

2 ... gold-plated 0.38 μ m thickness (A type)

3 ... gold-plated 0.76 μ m thickness


3 ... gold-plated 0.76 μ m thickness (A type)


5 ... tin-plated (reflow treatment)


· Common marking on the contact and its application tools In order to avoid incorrect combination of the hand crimp tools or extraction tools and the contacts, the series name (for example J-3) and wire range mark (S, M, L, 2L) are shown on both the tools and the contacts.


J-3 S.....AWG #28 \sim #24 M....AWG #24 \sim #20

L....AWG #20 ~ #16 2L...AWG #16 ~ #14











Keying plug

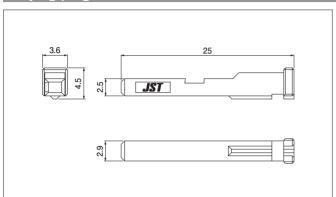

| Model No. | Material and Finish |
|-----------|----------------------------------|
| J3KP-VS | Glass-filled PBT, UL94V-0, white |

RoHS2 compliance

Tab contact (Cutting jig)

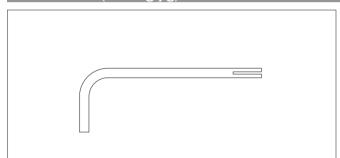


| Model No. |
|-----------|
| CT-JFAJ3A |

Note: Unlisted in UL/TÜV

Assembly layout < Top entry type > < Side entry type > (8.6) (28.9) Wire-to-board < Free hanging type / Panel mounting type > (40.6) Wire-to-wire

Receptacle housing

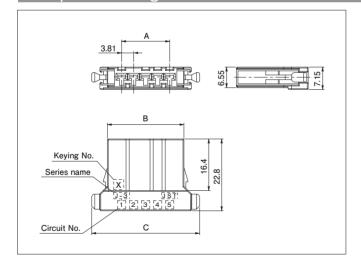


| No. of | Keying | Model No. | Dim | nensions | (mm) | Q'ty |
|----------|---------|---------------|-------|----------|-------|------|
| circuits | Reyling | woder ivo. | Α | В | O | /bag |
| 3 | Х | F31FSS-03V-KX | 7.62 | 16.70 | 26.62 | 200 |
| 3 | Υ | F31FSS-03V-KY | 7.62 | 16.70 | 26.62 | 200 |
| 4 | Х | F31FSS-04V-KX | 11.43 | 20.51 | 30.43 | 200 |
| | Υ | F31FSS-04V-KY | 11.43 | 20.51 | 30.43 | 200 |
| 5 | Х | F31FSS-05V-KX | 15.24 | 24.32 | 34.24 | 200 |
| | Υ | F31FSS-05V-KY | 15.24 | 24.32 | 34.24 | 200 |
| 6 | Х | F31FSS-06V-KX | 19.05 | 28.13 | 38.05 | 200 |
| | Υ | F31FSS-06V-KY | 19.05 | 28.13 | 38.05 | 200 |
| 8 | Х | F31FSS-08V-KX | 26.67 | 35.75 | 45.67 | 100 |
| | Υ | F31FSS-08V-KY | 26.67 | 35.75 | 45.67 | 100 |
| 10 | Х | F31FSS-10V-KX | 34.29 | 43.37 | 53.29 | 100 |
| | Υ | F31FSS-10V-KY | 34.29 | 43.37 | 53.29 | 100 |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Tab housing (Free hanging type)

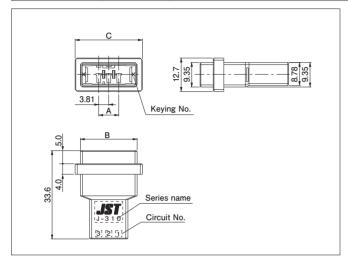


| No. of | Keying | Madal Na | Dim | Q'ty | | |
|----------|--------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------|---------------------------------------|------|
| circuits | Keying | Model No. | MSF-03V-KY 7.62 MSF-04V-KX 11.43 MSF-04V-KY 11.43 MSF-05V-KX 15.24 MSF-05V-KY 15.24 MSF-08V-KX 26.67 MSF-08V-KY 26.67 | В | С | /bag |
| _ | Х | F31MSF-03V-KX | 7.62 | 21.62 | 25.57 | 200 |
| 3 | Υ | F31MSF-03V-KY | 7.62 | 21.62 | 25.57 | 200 |
| | Х | F31MSF-04V-KX | 11.43 | 25.43 | 29.38 | 200 |
| 4 | Υ | F31MSF-04V-KY | 11.43 | 25.43 | 29.38 | 200 |
| _ | Х | F31MSF-05V-KX | 15.24 | 29.24 | 33.19 | 200 |
| 5 | Υ | F31MSF-05V-KY | 15.24 | 29.24 | C 25.57 25.57 29.38 29.38 | 200 |
| • | Х | F31MSF-08V-KX | 26.67 | 40.67 | 44.62 | 100 |
| 8 | Υ | F31MSF-08V-KY | 26.67 | 40.67 | 44.62 | 100 |
| 10 | Х | F31MSF-10V-KX | 34.29 | 48.29 | 52.24 | 100 |
| 10 | Υ | F31MSF-10V-KY | 34.29 | 48.29 | 52.24 | 100 |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Tab housing (Panel mounting type)

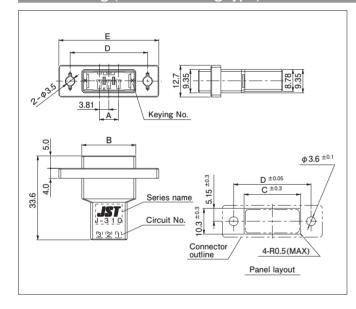

| No. of | Karina | Model No. | | Dime | ensions | (mm) | | Q'ty |
|----------|--------|---------------|-------|-------|---------|-------|-------|------|
| circuits | Keying | Model No. | Α | В | С | D | E | /bag |
| | Х | F31MSP-03V-KX | 7.62 | 21.62 | 22.60 | 31.00 | 40.00 | 200 |
| 3 | Υ | F31MSP-03V-KY | 7.62 | 21.62 | 22.60 | 31.00 | 40.00 | 200 |
| | Х | F31MSP-04V-KX | 11.43 | 25.43 | 26.40 | 34.50 | 43.50 | 200 |
| 4 | Υ | F31MSP-04V-KY | 11.43 | 25.43 | 26.40 | 34.50 | 43.50 | 200 |
| | Х | F31MSP-05V-KX | 15.24 | 29.24 | 30.20 | 38.00 | 47.00 | 200 |
| 5 | Υ | F31MSP-05V-KY | 15.24 | 29.24 | 30.20 | 38.00 | 47.00 | 200 |
| | Х | F31MSP-08V-KX | 26.67 | 40.67 | 41.60 | 50.00 | 59.00 | 100 |
| 8 | Υ | F31MSP-08V-KY | 26.67 | 40.67 | 41.60 | 50.00 | 59.00 | 100 |
| 40 | Х | F31MSP-10V-KX | 34.29 | 48.29 | 49.20 | 58.00 | 67.00 | 100 |
| 10 | Υ | F31MSP-10V-KY | 34.29 | 48.29 | 49.20 | 58.00 | 67.00 | 100 |

Material and Finish


Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Note: 1. Punch holes in the panel. Burrs must be removed.

- 2. The strength of the panel must be considered when punching two or more holes.
- 3. The connector must be inserted from the same side as the hole is punched.

Header (Top entry type)

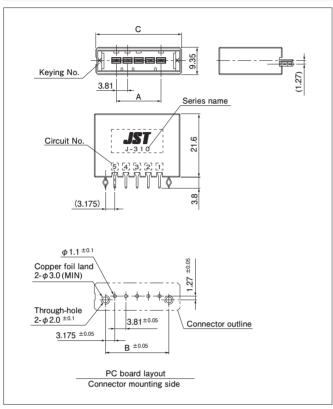

| No. of | Keying | Model No. | Dim | ensions | (mm) | O24/lb.a | |
|----------|---------|-----------------|-------|---------|-------|----------|--|
| circuits | Reyling | Wiodel No. | Α | ВС | | Q'ty/box | |
| | Х | B03B-F31SK-GGXR | 7.62 | 13.97 | 21.62 | 220 | |
| 3 | Υ | B03B-F31SK-GGYR | 7.62 | 13.97 | 21.62 | 220 | |
| | Х | B04B-F31SK-GGXR | 11.43 | 17.78 | 25.43 | 180 | |
| 4 | Υ | B04B-F31SK-GGYR | 11.43 | 17.78 | 25.43 | 180 | |
| _ | Х | B05B-F31SK-GGXR | 15.24 | 21.59 | 29.24 | 160 | |
| 5 | Y | B05B-F31SK-GGYR | 15.24 | 21.59 | 29.24 | 160 | |
| | Х | B06B-F31SK-GGXR | 19.05 | 25.40 | 33.05 | 140 | |
| 6 | Υ | B06B-F31SK-GGYR | 19.05 | 25.40 | 33.05 | 140 | |
| | Х | B08B-F31SK-GGXR | 26.67 | 33.02 | 40.67 | 120 | |
| 8 | Υ | B08B-F31SK-GGYR | 26.67 | 33.02 | 40.67 | 120 | |
| 10 | Х | B10B-F31SK-GGXR | 34.29 | 40.64 | 48.29 | 100 | |
| 10 | Υ | B10B-F31SK-GGYR | 34.29 | 40.64 | 48.29 | 100 | |


Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

- Note: 1. Contact JST about the headers supplied in magazine stick.
 - 2. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

Header (Side entry type)

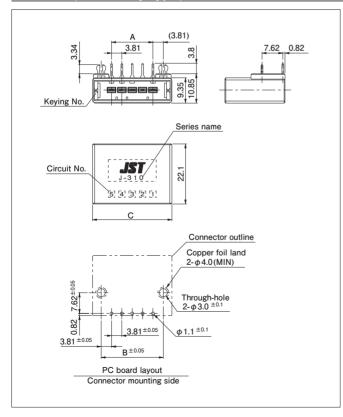

| No. of | Keying | Model No. | Din | nensions | (mm) | O'tu /b ov |
|----------|---------|-----------------|-------|----------|-------|------------|
| circuits | Reyling | woder No. | Α | В | С | Q'ty/box |
| _ | Х | S03B-F31SK-GGXR | 7.62 | 15.24 | 21.62 | 165 |
| 3 | Y | S03B-F31SK-GGYR | 7.62 | 15.24 | 21.62 | 165 |
| | Х | S04B-F31SK-GGXR | 11.43 | 19.05 | 25.43 | 135 |
| 4 | Y | S04B-F31SK-GGYR | 11.43 | 19.05 | 25.43 | 135 |
| | Х | S05B-F31SK-GGXR | 15.24 | 22.86 | 29.24 | 120 |
| 5 | Y | S05B-F31SK-GGYR | 15.24 | 22.86 | 29.24 | 120 |
| | Х | S06B-F31SK-GGXR | 19.05 | 26.67 | 33.05 | 105 |
| 6 | Y | S06B-F31SK-GGYR | 19.05 | 26.67 | 33.05 | 105 |
| | Х | S08B-F31SK-GGXR | 26.67 | 34.29 | 40.67 | 90 |
| 8 | Y | S08B-F31SK-GGYR | 26.67 | 34.29 | 40.67 | 90 |
| | Х | S10B-F31SK-GGXR | 34.29 | 41.91 | 48.29 | 75 |
| 10 | Υ | S10B-F31SK-GGYR | 34.29 | 41.91 | 48.29 | 75 |


Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated


RoHS2 compliance This product displays (LF)(AU) on a label.

- Note: 1. Contact JST about the headers supplied in magazine stick.
 - 2. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

J300 SERIES/J310D

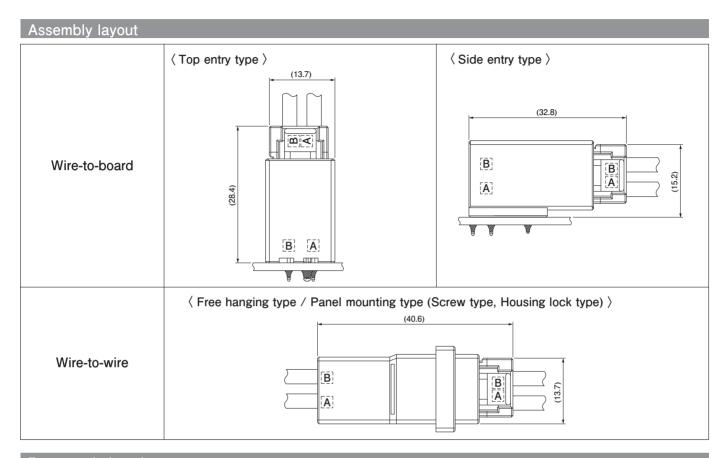

Receptacle housing

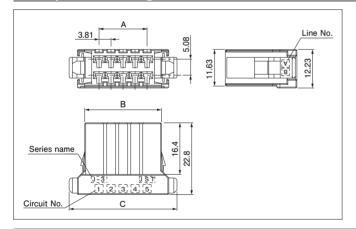


| No. of | Keying | eying Model No. | Dim | (mm) | Q'ty/bag | |
|----------|---------|-----------------|-------|-------|----------|----------|
| circuits | Reyling | Model No. | Α | В | С | Q ty/bag |
| 6 | _ | F31FDS-06V-K | 7.62 | 16.70 | 26.62 | 200 |
| 8 | _ | F31FDS-08V-K | 11.43 | 20.51 | 30.43 | 100 |
| 10 | _ | F31FDS-10V-K | 15.24 | 24.32 | 34.24 | 100 |
| 12 | _ | F31FDS-12V-K | 19.05 | 28.13 | 38.05 | 100 |
| 16 | _ | F31FDS-16V-K | 26.67 | 35.75 | 45.67 | 100 |
| 20 | _ | F31FDS-20V-K | 34.29 | 43.37 | 53.29 | 100 |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Tab housing (Free hanging type)

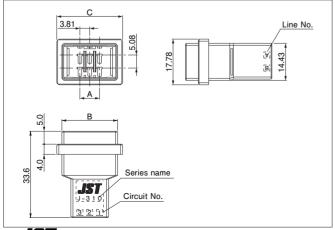

| No. of | Keving | Keying Model No. | Dim | (mm) | Q'ty/bag | |
|----------|--------|------------------|-------|-------|----------|-----|
| circuits | Keying | Model No. | A B C | | Q ty/bag | |
| 6 | _ | F31MDF-06V-K | 7.62 | 21.62 | 25.57 | 200 |
| 8 | _ | F31MDF-08V-K | 11.43 | 25.43 | 29.38 | 100 |
| 10 | _ | F31MDF-10V-K | 15.24 | 29.24 | 33.19 | 100 |
| 12 | _ | F31MDF-12V-K | 19.05 | 33.05 | 37.00 | 100 |
| 16 | _ | F31MDF-16V-K | 26.67 | 40.67 | 44.62 | 100 |
| 20 | _ | F31MDF-20V-K | 34.29 | 48.29 | 52.24 | 100 |
| | | | | | | |


Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

J300 SERIES/J310D

Tab housing (Panel mounting type)

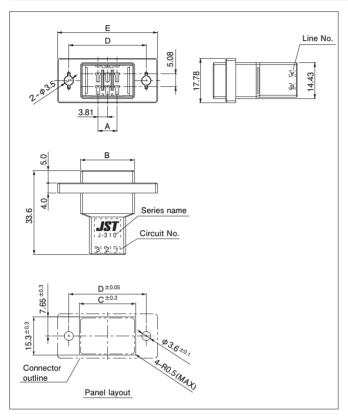

| No. of circuits | Kovina | ing Model No. | Dimensions (mm) | | | | | Q'ty |
|-----------------|---------|---------------|-----------------|-------|-------|-------|-------|------|
| circuits | Keyirig | Model No. | Α | В | С | D | Е | /bag |
| 6 | _ | F31MDP-06V-K | 7.62 | 21.62 | 22.60 | 31.00 | 40.00 | 200 |
| 8 | _ | F31MDP-08V-K | 11.43 | 25.43 | 26.40 | 34.50 | 43.50 | 100 |
| 10 | _ | F31MDP-10V-K | 15.24 | 29.24 | 30.20 | 38.00 | 47.00 | 100 |
| 12 | _ | F31MDP-12V-K | 19.05 | 33.05 | 34.00 | 42.00 | 51.00 | 100 |
| 16 | _ | F31MDP-16V-K | 26.67 | 40.67 | 41.60 | 50.00 | 59.00 | 100 |
| 20 | _ | F31MDP-20V-K | 34.29 | 48.29 | 49.20 | 58.00 | 67.00 | 100 |


Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

- Note: 1. Punch holes in the panel. Burrs must be removed.
 - The strength of the panel must be considered when punching two or more holes.
 - The connector must be inserted from the same side as the hole is punched.

Tab housing (Panel mounting Housing lock type)

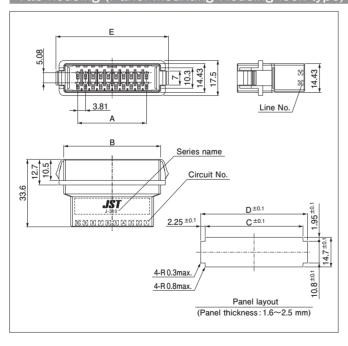

| No. of | No. of circuits Keying | Model No. | | Dimensions (mm) | | | | | |
|----------|------------------------|---------------|-------|-----------------|-------|-------|-------|------|--|
| circuits | Keying | | Α | В | С | D | E | /bag | |
| 6 | _ | F31MDPL-06V-K | 7.62 | 21.62 | 22.15 | 26.65 | 26.33 | 100 | |
| 12 | _ | F31MDPL-12V-K | 19.05 | 33.05 | 33.55 | 38.05 | 37.76 | 100 | |
| 20 | _ | F31MDPL-20V-K | 34.29 | 48.29 | 48.80 | 53.30 | 53.00 | 80 | |

Material and Finish


Glass-filled PBT, UL94V-0, black

RoHS2 compliance

- Note: 1. Punch holes in the panel. Burrs must be removed.
 - The strength of the panel must be considered when punching two or more holes.
 - 3. The connector must be inserted from the same side as the hole is punched.
 - 4. Unlisted in UL/TÜV.

J300 SERIES/J310D

Header (Top entry type)

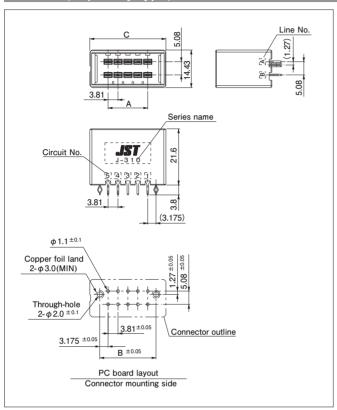

| No. of | Keying | Model No. | Dim | O'tu /bay | | |
|----------|--------|----------------|-------|-----------|-------|----------|
| circuits | Keying | woder No. | Α | В | С | Q'ty/box |
| 6 | | B06B-F31DK-GGR | 7.62 | 13.97 | 21.62 | 132 |
| 8 | _ | B08B-F31DK-GGR | 11.43 | 17.78 | 25.43 | 108 |
| 10 | _ | B10B-F31DK-GGR | 15.24 | 21.59 | 29.24 | 96 |
| 12 | _ | B12B-F31DK-GGR | 19.05 | 25.40 | 33.05 | 84 |
| 16 | | B16B-F31DK-GGR | 26.67 | 33.02 | 40.67 | 72 |
| 20 | _ | B20B-F31DK-GGR | 34.29 | 40.64 | 48.29 | 60 |

Material and Finish


Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

Note: 1. Contact JST about the headers supplied in magazine stick.

2. Contact JST about 0.76 μm gold-plated product and tin-plated product.

Header (Side entry type)

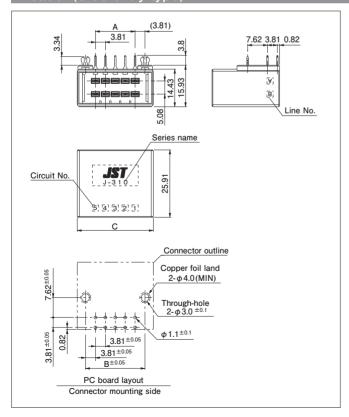

| No. of | Kovina | Keving Model No. | | Dimensions (mm) | | | |
|----------|--------|------------------|-------|-----------------|-------|----------|--|
| circuits | Keying | woder No. | Α | В | С | Q'ty/box | |
| 6 | _ | S06B-F31DK-GGR | 7.62 | 15.24 | 21.62 | 88 | |
| 8 | _ | S08B-F31DK-GGR | 11.43 | 19.05 | 25.43 | 72 | |
| 10 | _ | S10B-F31DK-GGR | 15.24 | 22.86 | 29.24 | 64 | |
| 12 | _ | S12B-F31DK-GGR | 19.05 | 26.67 | 33.05 | 56 | |
| 16 | _ | S16B-F31DK-GGR | 26.67 | 34.29 | 40.67 | 48 | |
| 20 | _ | S20B-F31DK-GGR | 34.29 | 41.91 | 48.29 | 40 | |

Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black


Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

 $\label{localization} \textbf{RoHS2 compliance} \quad \textbf{This product displays (LF)(AU) on a label}.$


Note: 1. Contact JST about the headers supplied in magazine stick.

2. Contact JST about 0.76 $\mu \mathrm{m}$ gold-plated product and tin-plated product.

Assembly layout

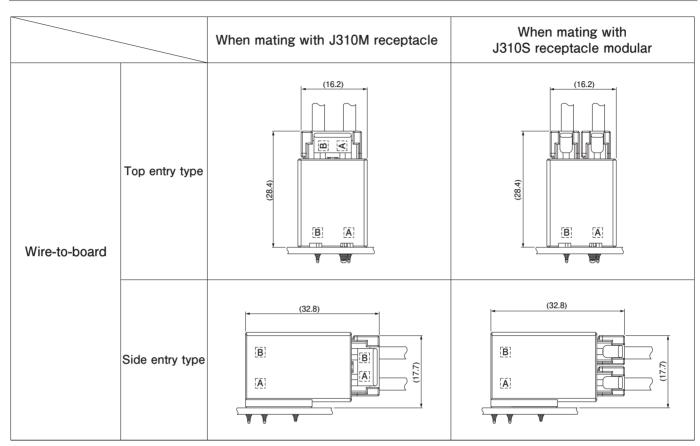

Receptacle housing

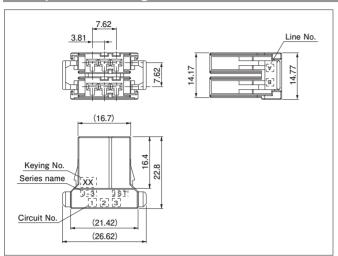


| No. of circuits | Keying | Model No. | Q'ty/bag |
|-----------------|--------|----------------|----------|
| | XX | F31FMS-06V-KXX | 100 |
| 6 | YY | F31FMS-06V-KYY | 100 |
| | XY | F31FMS-06V-KXY | 100 |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Header (Top entry type)

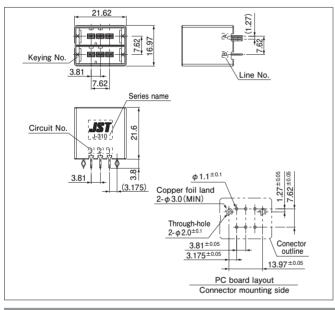

| No. of circuits | Keying | Model No. | Q'ty/box |
|-----------------|--------|------------------|----------|
| | XX | B06B-F31MK-GGXXR | 132 |
| 6 | YY | B06B-F31MK-GGYYR | 132 |
| | XY | B06B-F31MK-GGXYR | 132 |


Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

- Note: 1. Contact JST about the headers supplied in magazine stick.
 - 2. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

Header (Side entry type)

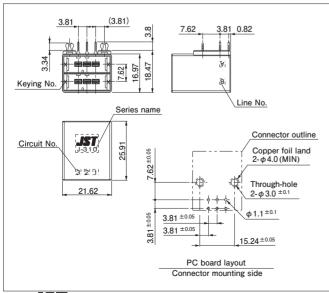

| No. of circuits | Keying | , 0 | |
|-----------------|--------|------------------|----|
| | XX | S06B-F31MK-GGXXR | 88 |
| 6 | YY | S06B-F31MK-GGYYR | 88 |
| | XY | S06B-F31MK-GGXYR | 88 |

Material and Finish


Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

Note: 1. Contact JST about the headers supplied in magazine stick.


2. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.


Keying

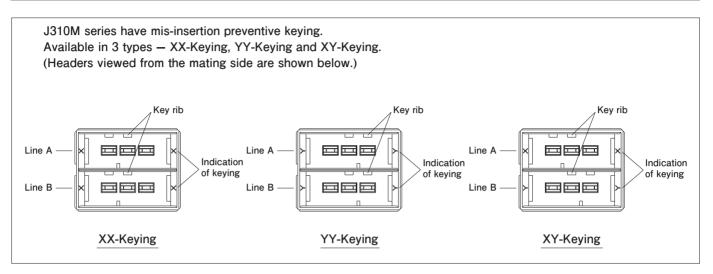


List of combinations

With the combination of the J310M headers and the J310M/J310S (3 circuits) receptacle housings, the following modular combinations are possible.

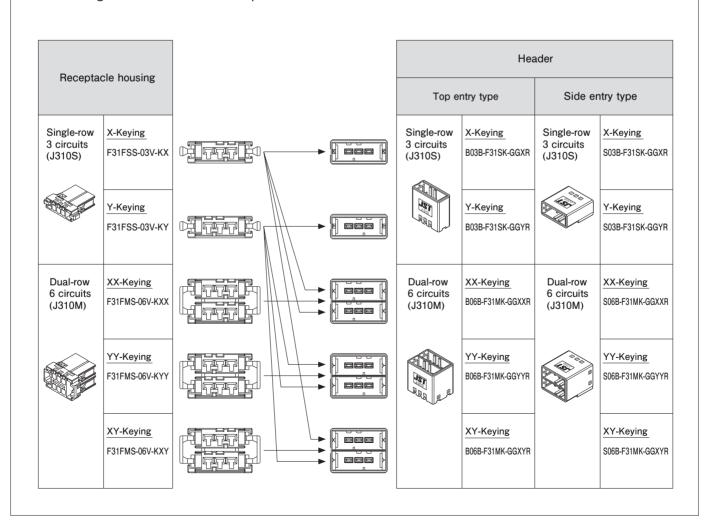

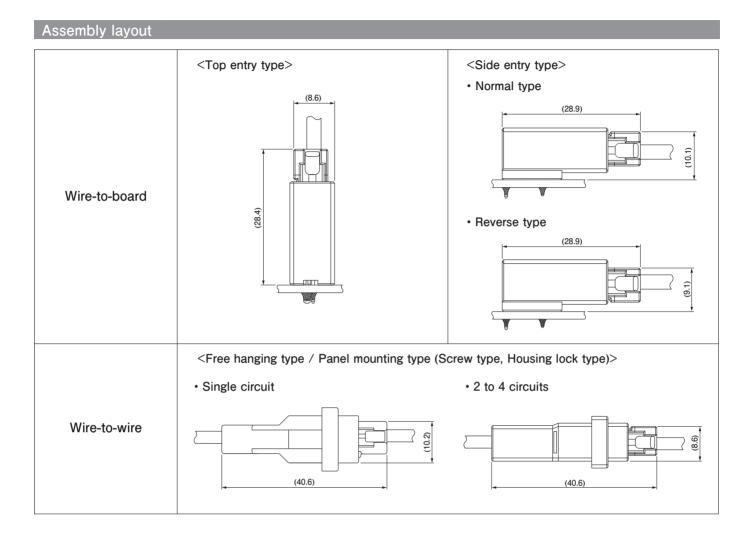

Receptacle housing

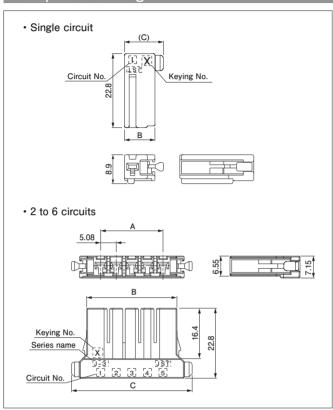


| No. of | Keying | Model No. | Dim | (mm) | Q'ty/bag | |
|----------|---------|---------------|-------|-------|----------|-----|
| circuits | Reyling | woder No. | Α | A B | | |
| | Х | F32FSS-01V-KX | _ | 9.40 | 12.00 | 200 |
| 1 | Υ | F32FSS-01V-KY | _ | 9.40 | 12.00 | 200 |
| 2 | Х | F32FSS-02V-KX | 5.08 | 14.16 | 24.08 | 200 |
| 2 | Υ | F32FSS-02V-KY | 5.08 | 14.16 | 24.08 | 200 |
| 3 | Х | F32FSS-03V-KX | 10.16 | 19.24 | 29.16 | 200 |
| 3 | Υ | F32FSS-03V-KY | 10.16 | 19.24 | 29.16 | 200 |
| 4 | Х | F32FSS-04V-KX | 15.24 | 24.32 | 34.24 | 200 |
| 4 | Υ | F32FSS-04V-KY | 15.24 | 24.32 | 34.24 | 200 |
| 5 | Х | F32FSS-05V-KX | 20.32 | 29.40 | 39.32 | 200 |
| 5 | Υ | F32FSS-05V-KY | 20.32 | 29.40 | 39.32 | 200 |
| | Х | F32FSS-06V-KX | 25.40 | 34.48 | 44.40 | 100 |
| 6 | Υ | F32FSS-06V-KY | 25.40 | 34.48 | 44.40 | 100 |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Tab housing (Free hanging type)

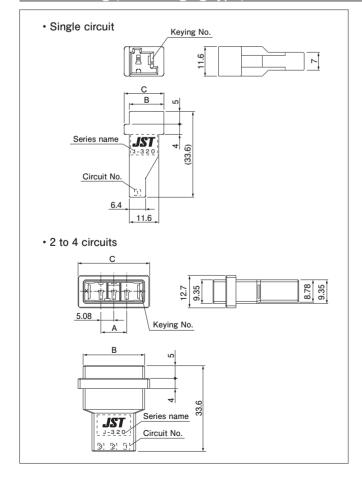


| | No. of | Keying | Model No. | Dimensions (mm) | | | Q'ty/bag |
|---|----------|--------|---------------|-----------------|-------|-------|-----------|
| | circuits | Keying | | Α | В | С | a ty/ bag |
| | 1 | Х | F32MSF-01V-KX | _ | 13.60 | 15.60 | 150 |
| | ' | Υ | F32MSF-01V-KY | _ | 13.60 | 15.60 | 150 |
| | 2 | Х | F32MSF-02V-KX | 5.08 | 19.08 | 23.03 | 200 |
| | 2 | Υ | F32MSF-02V-KY | 5.08 | 19.08 | 23.03 | 200 |
| | 3 | Х | F32MSF-03V-KX | 10.16 | 24.16 | 28.11 | 200 |
| | 3 | Υ | F32MSF-03V-KY | 10.16 | 24.16 | 28.11 | 200 |
| | 4 | Х | F32MSF-04V-KX | 15.24 | 29.24 | 33.19 | 200 |
| _ | 7 | Υ | F32MSF-04V-KY | 15.24 | 29.24 | 33.19 | 200 |

Material and Finish
Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Tab housing (Panel mounting type)

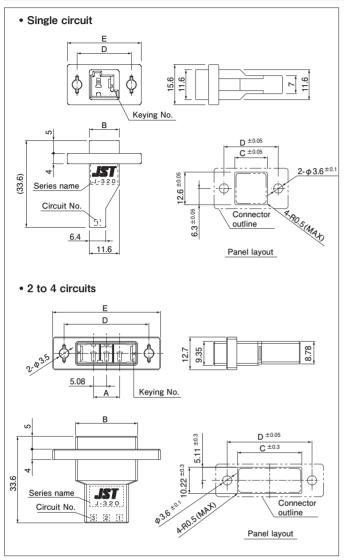

| No. of | Keying Model No. | | | | Q'ty | | | |
|----------|------------------|---------------|-------|-------|-------|-------|-------|------|
| circuits | Reyling | woder No. | Α | В | С | D | E | /bag |
| - | Х | F32MSP-01V-KX | _ | 11.60 | 12.60 | 21.00 | 28.60 | 150 |
| 1 | Υ | F32MSP-01V-KY | _ | 11.60 | 12.60 | 21.00 | 28.60 | 150 |
| 2 | Х | F32MSP-02V-KX | 5.08 | 19.08 | 20.00 | 28.00 | 36.83 | 200 |
| 2 | Υ | F32MSP-02V-KY | 5.08 | 19.08 | 20.00 | 28.00 | 36.83 | 200 |
| 3 | Х | F32MSP-03V-KX | 10.16 | 24.16 | 25.00 | 33.00 | 41.91 | 200 |
| 3 | Υ | F32MSP-03V-KY | 10.16 | 24.16 | 25.00 | 33.00 | 41.91 | 200 |
| 4 | Х | F32MSP-04V-KX | 15.24 | 29.24 | 30.00 | 38.00 | 46.99 | 200 |
| 4 | Υ | F32MSP-04V-KY | 15.24 | 29.24 | 30.00 | 38.00 | 46.99 | 200 |

Material and Finish


Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Note: 1. Punch holes in the panel. Burrs must be removed.

- The strength of the panel must be considered when punching two or more holes.
- 3. The connector must be inserted from the same side as the hole is punched.

Tab housing (Panel mounting type Housing lock type)

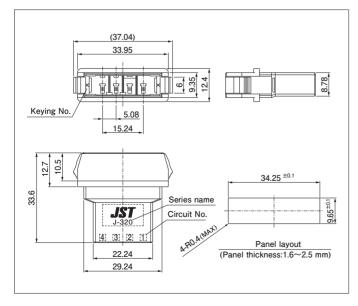

| No. of circuits | Keying | Model No. | Q'ty/bag |
|-----------------|--------|----------------|----------|
| 4 | Х | F32MSPL-04V-KX | 90 |

Material and Finish


Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Note: 1. Punch holes in the panel. Burrs must be removed.

- 2. The strength of the panel must be considered when punching two or more holes.
- 3. The connector must be inserted from the same side as the hole is punched.
- 4. Unlisted in TÜV.

Header (Top entry type)

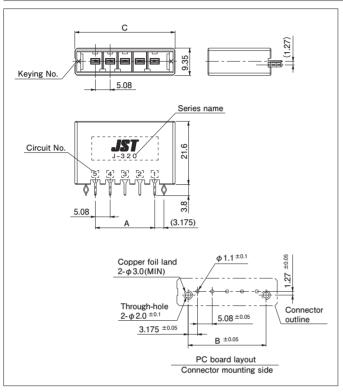

| No. of | Kariban. | Madel Na | Dim | nensions | (mm) | Q'ty/box |
|----------|----------|-----------------|-------|----------|-------|-----------|
| circuits | Keying | Model No. | Α | В | С | Q ty/ box |
| 2 | Х | B02B-F32SK-GGXR | 5.08 | 11.43 | 19.08 | 240 |
| 2 | Y | B02B-F32SK-GGYR | 5.08 | 11.43 | 19.08 | 240 |
| 3 | Х | B03B-F32SK-GGXR | 10.16 | 16.51 | 24.16 | 200 |
| 3 | Υ | B03B-F32SK-GGYR | 10.16 | 16.51 | 24.16 | 200 |
| 4 | Х | B04B-F32SK-GGXR | 15.24 | 21.59 | 29.24 | 160 |
| 4 | Y | B04B-F32SK-GGYR | 15.24 | 21.59 | 29.24 | 160 |
| 5 | Х | B05B-F32SK-GGXR | 20.32 | 26.67 | 34.32 | 140 |
| 3 | Y | B05B-F32SK-GGYR | 20.32 | 26.67 | 34.32 | 140 |
| 6 | Х | B06B-F32SK-GGXR | 25.40 | 31.75 | 39.40 | 120 |
| | Y | B06B-F32SK-GGYR | 25.40 | 31.75 | 39.40 | 120 |

Material and Finish


Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black

Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label. Note: 1. Contact JST about the headers supplied in magazine stick.

2. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

Header (Side entry type)

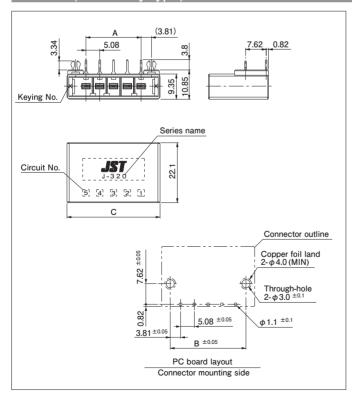

| No. of | Keying Model No. | | Dimensions (mm) | | | Q'ty/box |
|----------|------------------|-----------------|-----------------|-------|-------|----------|
| circuits | Reyling | woder ivo. | Α | В | С | Q ty/box |
| 2 | Х | S02B-F32SK-GGXR | 5.08 | 12.70 | 19.08 | 180 |
| 2 | Υ | S02B-F32SK-GGYR | 5.08 | 12.70 | 19.08 | 180 |
| 3 | Х | S03B-F32SK-GGXR | 10.16 | 17.78 | 24.16 | 150 |
| 3 | Υ | S03B-F32SK-GGYR | 10.16 | 17.78 | 24.16 | 150 |
| 4 | Х | S04B-F32SK-GGXR | 15.24 | 22.86 | 29.24 | 120 |
| 4 | Υ | S04B-F32SK-GGYR | 15.24 | 22.86 | 29.24 | 120 |
| 5 | Х | S05B-F32SK-GGXR | 20.32 | 27.94 | 34.32 | 105 |
| 5 | Υ | S05B-F32SK-GGYR | 20.32 | 27.94 | 34.32 | 105 |
| 6 | Х | S06B-F32SK-GGXR | 25.40 | 33.02 | 39.40 | 90 |
| U | Υ | S06B-F32SK-GGYR | 25.40 | 33.02 | 39.40 | 90 |

Material and Finish


Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

Note: 1. Contact JST about the headers supplied in magazine stick.

2. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

Header (Side entry type Reverse type)

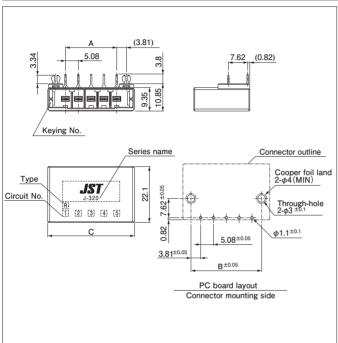

| No. of | Koving | Keying Model No. | | nensions | (mm) | Q'ty |
|----------|------------------------|------------------|-------|----------|-------|------|
| circuits | No. of circuits Keying | Wiodel No. | Α | В | С | /box |
| 5 | Х | SR05B-F32SK-GGXR | 20.32 | 27.94 | 34.32 | 105 |
| 6 | Х | SR06B-F32SK-GGXR | 25.40 | 33.02 | 39.40 | 90 |

Material and Finish


Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

- Note: 1. Contact JST about the headers supplied in magazine stick.
 - 2. Contact JST about $0.76\,\mu\mathrm{m}$ gold-plated product and tin-plated product
 - 3. Unlisted in TÜV.

Assembly layout When mating with When mating with J320M receptacle J320S receptacle modular (16.2) (16.2) Top entry type (28.2) (28.4) [A]Wire-to-board _aam_ (33.8) (34) Side entry type Free hanging B) type Wire-to-wire [A] Panel mounting type (40.4) (40.6)

Receptacle housing

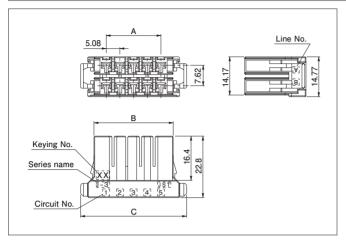


| No. of | Keying | Model No. | Dim | (mm) | Q'ty | |
|----------|---------|----------------|-------|-------|-------|---------|
| circuits | Reyling | woder No. | Α | В | С | /bag |
| | XX | F32FMS-06V-KXX | 10.16 | 19.24 | 29.16 | 100 |
| 6 | YY | F32FMS-06V-KYY | 10.16 | 19.24 | 29.16 | 100 |
| | XY | F32FMS-06V-KXY | 10.16 | 19.24 | 29.16 | 100 |
| | XX | F32FMS-10V-KXX | 20.32 | 29.40 | 39.32 | 100 |
| 10 | YY | F32FMS-10V-KYY | 20.32 | 29.40 | 39.32 | 100 |
| | XY | F32FMS-10V-KXY | 20.32 | 29.40 | 39.32 | 100 |
| | XX | F32FMS-12V-KXX | 25.40 | 34.48 | 44.40 | 100 |
| 12 | YY | F32FMS-12V-KYY | 25.40 | 34.48 | 44.40 | 100 |
| | XY | F32FMS-12V-KXY | 25.40 | 34.48 | 44.40 | 100 |
| 20 | XX | F32FMS-20V-KXX | 45.72 | 54.80 | 64.72 | 84(box) |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Tab housing (Free hanging type)

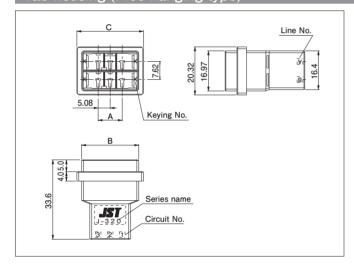


| No. of | Keying | Model No. | Dimensions (mm) | | | Q'ty |
|----------|--------|----------------|-----------------|-------|-------|------|
| circuits | reying | ying Model No. | | В | С | /bag |
| | XX | F32MDF-06V-KXX | 10.16 | 24.16 | 28.11 | 100 |
| 6 | YY | F32MDF-06V-KYY | 10.16 | 24.16 | 28.11 | 100 |
| | XY | F32MDF-06V-KXY | 10.16 | 24.16 | 28.11 | 100 |
| | XX | F32MDF-12V-KXX | 25.40 | 39.40 | 43.35 | 100 |
| 12 | YY | F32MDF-12V-KYY | 25.40 | 39.40 | 43.35 | 100 |
| | XY | F32MDF-12V-KXY | 25.40 | 39.40 | 43.35 | 100 |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Tab housing (Panel mounting type)

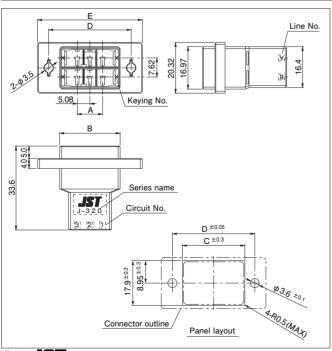

| No. of circuits | Keying | Keving Model No. | | Dimensions (mm) | | | | |
|-----------------|---------|------------------|-------|-----------------|-------|-------|-------|---------|
| circuits | Keyirig | ; Iviouei ivo. | Α | В | C | D | E | /bag |
| | XX | F32MDP-06V-KXX | 10.16 | 24.16 | 25.00 | 33.00 | 41.91 | 100 |
| 6 | YY | F32MDP-06V-KYY | 10.16 | 24.16 | 25.00 | 33.00 | 41.91 | 100 |
| | XY | F32MDP-06V-KXY | 10.16 | 24.16 | 25.00 | 33.00 | 41.91 | 100 |
| | XX | F32MDP-12V-KXX | 25.40 | 39.40 | 41.00 | 49.00 | 57.91 | 100 |
| 12 | YY | F32MDP-12V-KYY | 25.40 | 39.40 | 41.00 | 49.00 | 57.91 | 100 |
| | XY | F32MDP-12V-KXY | 25.40 | 39.40 | 41.00 | 49.00 | 57.91 | 100 |
| 20 | XX | F32MDP-20V-KXX | 45.72 | 59.72 | 61.00 | 70.00 | 78.23 | 42(box) |


Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

- Note: 1. Punch holes in the panel. Burrs must be removed.
 - 2. The strength of the panel must be considered when punching two or more holes.
 - 3. The connector must be inserted from the same side as the hole is punched.

Header (Top entry type)

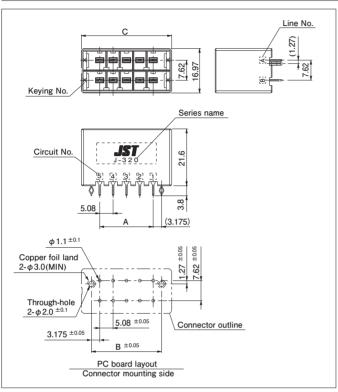

| No. of | Vauina | Keying Model No. | Dim | ensions | (mm) | Q'ty |
|----------|--------|------------------|-------|---------|-------|------|
| circuits | Keying | woder No. | Α | В | С | /box |
| | XX | B06B-F32MK-GGXXR | 10.16 | 16.51 | 24.16 | 120 |
| 6 | YY | B06B-F32MK-GGYYR | 10.16 | 16.51 | 24.16 | 120 |
| | XY | B06B-F32MK-GGXYR | 10.16 | 16.51 | 24.16 | 120 |
| | XX | B10B-F32MK-GGXXR | 20.32 | 26.67 | 34.32 | 84 |
| 10 | YY | B10B-F32MK-GGYYR | 20.32 | 26.67 | 34.32 | 84 |
| | XY | B10B-F32MK-GGXYR | 20.32 | 26.67 | 34.32 | 84 |
| | XX | B12B-F32MK-GGXXR | 25.40 | 31.75 | 39.40 | 72 |
| 12 | YY | B12B-F32MK-GGYYR | 25.40 | 31.75 | 39.40 | 72 |
| | XY | B12B-F32MK-GGXYR | 25.40 | 31.75 | 39.40 | 72 |

Material and Finish


Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

Note: 1. Contact JST about the headers supplied in magazine stick.

2. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

Header (Side entry type)

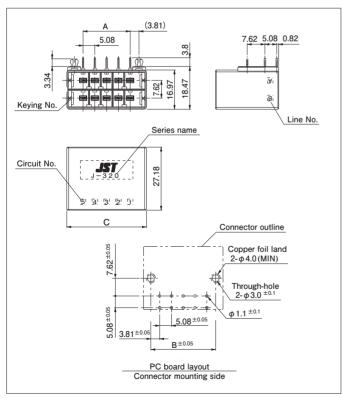

| Keying Model No. | Dimensions (mm) | | | Q'ty | |
|------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Keying | Model No. | Α | В | С | /box |
| XX | S06B-F32MK-GGXXR | 10.16 | 17.78 | 24.16 | 80 |
| YY | S06B-F32MK-GGYYR | 10.16 | 17.78 | 24.16 | 80 |
| XY | S06B-F32MK-GGXYR | 10.16 | 17.78 | 24.16 | 80 |
| XY | S08B-F32MK-GGXYR | 15.24 | 22.86 | 29.24 | 64 |
| XX | S10B-F32MK-GGXXR | 20.32 | 27.94 | 34.32 | 56 |
| YY | S10B-F32MK-GGYYR | 20.32 | 27.94 | 34.32 | 56 |
| XY | S10B-F32MK-GGXYR | 20.32 | 27.94 | 34.32 | 56 |
| XX | S12B-F32MK-GGXXR | 25.40 | 33.02 | 39.40 | 48 |
| YY | S12B-F32MK-GGYYR | 25.40 | 33.02 | 39.40 | 48 |
| XY | S12B-F32MK-GGXYR | 25.40 | 33.02 | 39.40 | 48 |
| | XX YY XY XY XX YY XY XY | XX S06B-F32MK-GGXXR YY S06B-F32MK-GGYYR XY S06B-F32MK-GGXYR XY S08B-F32MK-GGXYR XX S10B-F32MK-GGXXR YY S10B-F32MK-GGYYR XY S10B-F32MK-GGYYR XY S10B-F32MK-GGXYR XY S12B-F32MK-GGXYR YY S12B-F32MK-GGXYR | XX S06B-F32MK-GGXXR 10.16 YY S06B-F32MK-GGYYR 10.16 XY S06B-F32MK-GGXYR 10.16 XY S08B-F32MK-GGXYR 15.24 XX S10B-F32MK-GGXXR 20.32 YY S10B-F32MK-GGYYR 20.32 XY S10B-F32MK-GGXYR 20.32 XY S12B-F32MK-GGXYR 25.40 YY S12B-F32MK-GGYYR 25.40 | XX S06B-F32MK-GGXXR 10.16 17.78 YY S06B-F32MK-GGYYR 10.16 17.78 XY S06B-F32MK-GGXYR 10.16 17.78 XY S06B-F32MK-GGXYR 15.24 22.86 XX S10B-F32MK-GGXXR 20.32 27.94 YY S10B-F32MK-GGYYR 20.32 27.94 XY S10B-F32MK-GGXYR 20.32 27.94 XY S10B-F32MK-GGXYR 20.32 27.94 XX S12B-F32MK-GGXXR 25.40 33.02 YY S12B-F32MK-GGYYR 25.40 33.02 | XX S06B-F32MK-GGXXR 10.16 17.78 24.16 YY S06B-F32MK-GGYYR 10.16 17.78 24.16 XY S06B-F32MK-GGXYR 10.16 17.78 24.16 XY S06B-F32MK-GGXYR 15.24 22.86 29.24 XX S10B-F32MK-GGXXR 20.32 27.94 34.32 YY S10B-F32MK-GGYYR 20.32 27.94 34.32 XY S10B-F32MK-GGYYR 20.32 27.94 34.32 XX S12B-F32MK-GGXXR 25.40 33.02 39.40 YY S12B-F32MK-GGYYR 25.40 33.02 39.40 |

Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

Note: 1. Contact JST about the headers supplied in magazine stick.


2. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

Keving

J320M series have mis-insertion preventive keying. Available in 3 types - XX-Keying, YY-Keying and XY-Keying. (Headers viewed from the mating side are shown below.) Key rib Key rib Key rib Line A 団 Line A Line A |⊞/ 园 园 园 団 回 Indication Indication Indication of keying of keying of keying Line B Line B Line B XX-Keying YY-Keying XY-Keying


List of combinations

With the combination of the J320M headers and the J320M/J320S receptacle housings, the following modular combinations are possible.

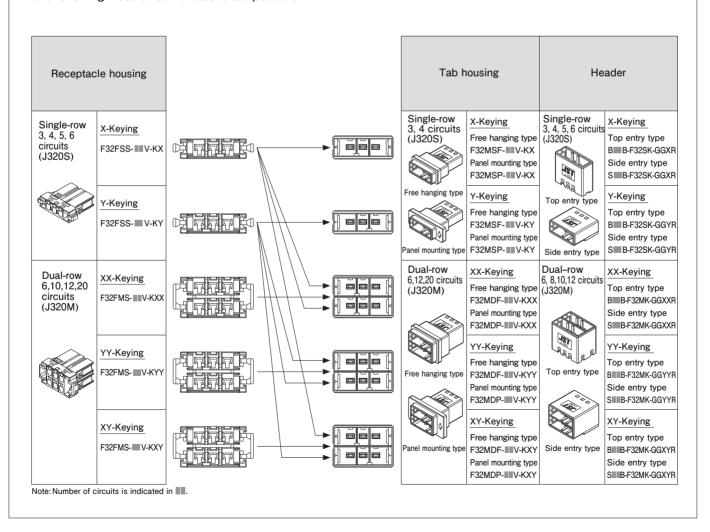

When mating with J320S receptacle When mating with J320M receptacle Wire-to-board Side entry type (39.1) (39.1) (39.1) (39.1) (39.1) (39.1) (39.1) (39.1)


Receptacle housing

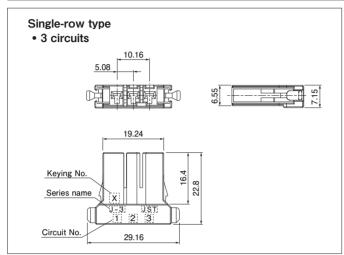

| No. of circuits | Keying | Model No. | Q'ty/bag |
|-----------------|--------|---------------|----------|
| 3 | Х | F32FSS-03V-KX | 200 |
| 3 | Υ | F32FSS-03V-KY | 200 |

Material
Glass-filled PBT, UL94V-0, black

RoHS2 compliance

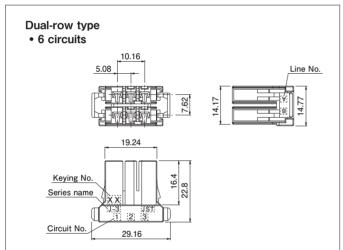


| No. of circuits | Keying | Model No. | Q'ty/bag |
|-----------------|--------|----------------|----------|
| | XX | F32FMS-06V-KXX | 100 |
| 6 | YY | F32FMS-06V-KYY | 100 |
| | XY | F32FMS-06V-KXY | 100 |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Header (Side entry type)

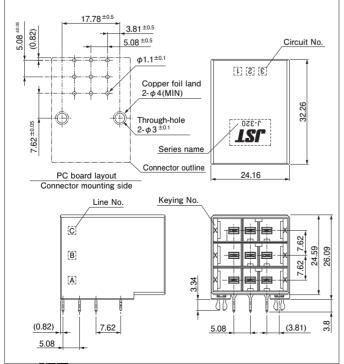

| No. of circuits | circuits Keying Model No. | | Q'ty/box |
|-----------------|---------------------------|------------------|----------|
| | XXX | S09B-F32TK-GGXAR | 42 |
| 0 | XXY | S09B-F32TK-GGXBR | 42 |
| 9 | XYX | S09B-F32TK-GGXCR | 42 |
| | YYX | S09B-F32TK-GGXDR | 42 |

Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black

Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label. Note: Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

YYX-Keying

J320T series have mis-insertion preventive keying. Available in 4 types — XXX-Keying, XXY-Keying, XYX-Keying and YYX-Keying. (Headers viewed from the mating side are shown below.) Line A Line A Line B Line C Line B Line C Line B Line C Line B Line C Key rib Key rib Key rib Key rib


XYX-Keying

List of combinations

XXX-Keying


With the combination of the J320T headers and the J320S/J320M receptacle housings, the following modular combinations are possible.

XXY-Keying

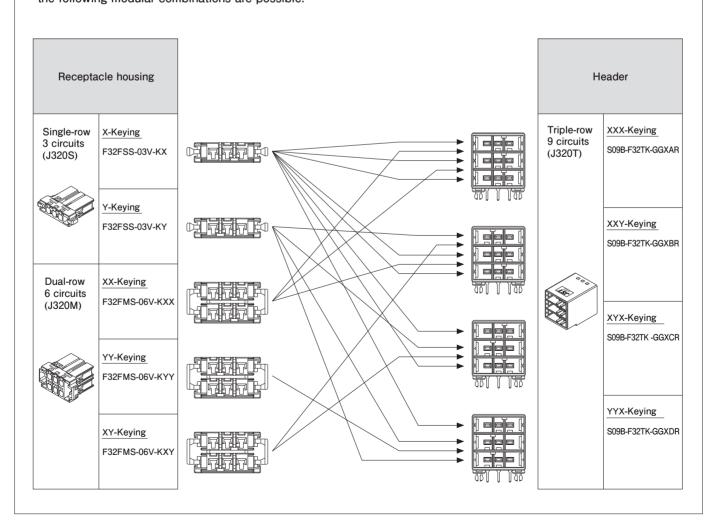

J300 SERIES/J330

Assembly layout

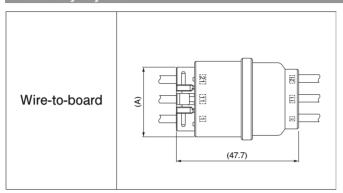

* In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).

* Dimensional unit : mm

* RoHS2 Compliance

* Contact JST for details.

Specifications

· Current rating: AC/DC

Unit: A

| No. of | | Dimensions (mm) | | | |
|----------|-----|-----------------|-----|-----|------|
| circuits | #14 | #16 | #18 | #20 | A |
| 30 | 8.5 | 7.0 | 5.5 | 4.0 | 27.2 |
| 40 | 8.5 | 7.0 | 5.5 | 4.0 | 34.9 |

· Voltage rating: 600 V AC/DC

· Temperature range: -55°C to +105°C

(including temperature rise in applying

electrical current)


· Contact resistance: Initial value/ 5 m Ω max.

After environmental tests/ $10 \text{ m}\Omega$ max.

· Insulation resistance: 1,000 M Ω min. · Withstanding voltage: 2,200 VAC/minute

· Applicable wire: AWG #28 to #14

Receptacle housing (Reverse type Panel mounting type)

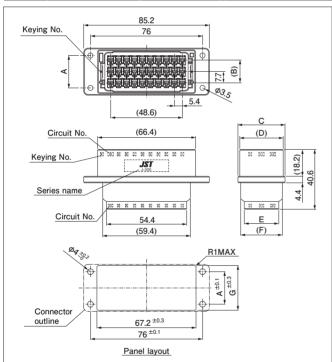

| No. of circuits | Keying | Model No. | Dimensions (mm) | | | | | | | Q'ty |
|------------------|--------|-----------------|-----------------|------|------|------|------|------|------|------|
| circuits Reyning | | wiodei No. | Α | В | O | D | Е | F | ß | /box |
| | Х | F33FRTPA-30V-KX | 22.0 | 15.4 | 31.9 | 29.5 | 23.3 | 28.3 | 30.3 | 56 |
| 30 | Υ | F33FRTPA-30V-SY | 22.0 | 15.4 | 31.9 | 29.5 | 23.3 | 28.3 | 30.3 | 56 |
| | Z | F33FRTPA-30V-EZ | 22.0 | 15.4 | 31.9 | 29.5 | 23.3 | 28.3 | 30.3 | 56 |
| | Х | F33FRFPA-40V-KX | 29.7 | 23.1 | 39.6 | 37.2 | 31.0 | 36.0 | 38.0 | 12 |
| 40 | Υ | F33FRFPA-40V-SY | 29.7 | 23.1 | 39.6 | 37.2 | 31.0 | 36.0 | 38.0 | 12 |
| 40 | Z | F33FRFPA-40V-EZ | 29.7 | 23.1 | 39.6 | 37.2 | 310 | 36.0 | 38.0 | 12 |
| | W | F33FRFPA-40V-MW | 29.7 | 23.1 | 39.6 | 37.2 | 31.0 | 36.0 | 38.0 | 12 |

Material and Finish


Glass-filled PBT, UL94V-0, X-Keying (black), Y-Keying (white), Z-Keying (blue), W-Keying (green)

RoHS2 compliance

Note: 1. Punch holes in the panel. Burrs must be removed.

- The strength of the panel must be considered when punching two or more holes.
- 3. The connector must be inserted from the same side as the hole is punched.
- 4. Unlisted in UL/TÜV.

Tab housing (Reverse type)

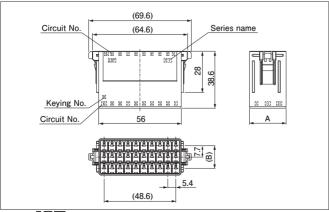

| No. of | Kardan. | Madal Na | Dimensions (mm) | | Q'ty |
|----------|---------|----------------|-----------------|------|------|
| circuits | Keying | Model No. | Α | В | /box |
| | Х | F33MRTS-30V-KX | 24.9 | 15.4 | 64 |
| 30 | Y | F33MRTS-30V-SY | 24.9 | 15.4 | 64 |
| | Z | F33MRTS-30V-EZ | 24.9 | 15.4 | 64 |
| | Х | F33MRFS-40V-KX | 32.6 | 23.1 | 64 |
| 40 | Y | F33MRFS-40V-SY | 32.6 | 23.1 | 64 |
| 40 | Z | F33MRFS-40V-EZ | 32.6 | 23.1 | 64 |
| | W | F33MRFS-40V-MW | 32.6 | 23.1 | 64 |

Material and Finish

Glass-filled PBT, UL94V-0, X-Keying (black), Y-Keying (white), Z-Keying (blue), W-Keying (green)


RoHS2 compliance

Note: Unlisted in UL/TÜV.

J300 SERIES/J340F

Wire-to-board Side entry type

Receptacle housing

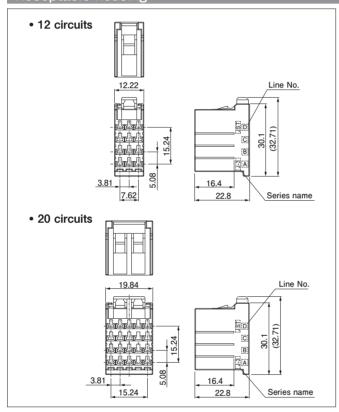


| No. of circuits | Keying | Model No. | Q'ty/bag |
|-----------------|--------|--------------|----------|
| 12 | _ | F34FFC-12V-K | 100 |
| 20 | _ | F34FFC-20V-K | 100 |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Header (Side entry type)

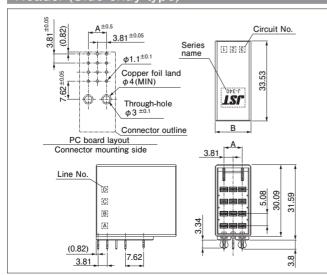

| No. of | Varing | Madal Na | Dimensi | Q'tv/box | |
|----------|--------|-----------------|---------|----------|----------|
| circuits | Keying | Model No. | Α | В | Q ty/box |
| 12 | _ | SC12B-F34FK-GGR | 7.62 | 15.02 | 63 |
| 20 | _ | SC20B-F34FK-GGR | 15.24 | 22.64 | 42 |


Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black

Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label. Note: Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

J300 SERIES/J350D

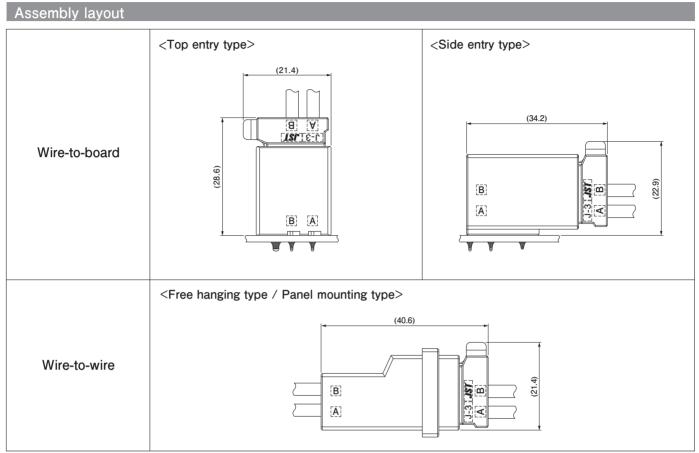

*When mating with receptacle housing (2-circuit)

Receptacle housing • 2 circuits • 4 circuits • 6 circuits (20.7) Line No. 16.4 Series name 5.08 16.4 5.08 16.4 Line No. 10.16 22.8 Series name 22.8 Series name • 10 circuits • 20 circuits 16.4 Line No. 16.4 Line No. 20.32 22.8 Series name Series name


| No. of circuits | Keying | Model No. | Q'ty/bag | | | |
|---------------------|--------|--------------|----------|--|--|--|
| 2 | _ | F35FDC-02V-K | 200 | | | |
| 4 | _ | F35FDC-04V-K | 200 | | | |
| 6 | _ | F35FDC-06V-K | 200 | | | |
| 10 | _ | F35FDC-10V-K | 100 | | | |
| Material and Finish | | | | | | |

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

J300 SERIES/J350D

Tab housing (Free hanging type)

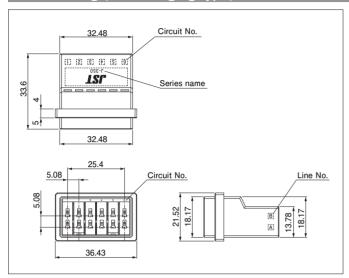


| No. of circuits | Keying | Model No. | Q'ty/box | |
|-----------------|--------|--------------|----------|--|
| 12 | _ | F35MDF-12V-K | 50 | |

Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance Note: Unlisted in TÜV.

Tab housing (Panel mounting type)

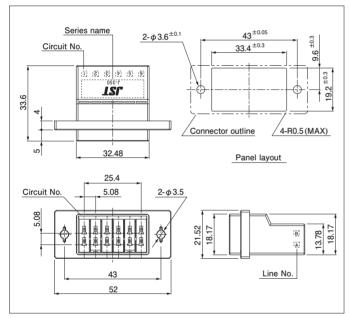


| | No. of circuits | Keying | Model No. | Q'ty/box | | | | |
|---|---------------------|--------|--------------|----------|--|--|--|--|
| · | 12 | _ | F35MDP-12V-K | 41 | | | | |
| i | Material and Finish | | | | | | | |

Glass-filled PBT, UL94V-0, black

RoHS2 compliance

- Note: 1. Punch holes in the panel. Burrs must be removed.
 - The strength of the panel must be considered when punching two or more holes.
 - 3. The connector must be inserted from the same side as the hole is punched.
 - 4. Unlisted in TÜV.

Header (Top entry type)

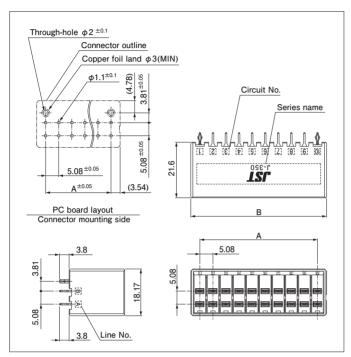


| No. of circuits | Manda a | Madal Na | Dimensi | O2+ - /h | |
|-----------------|---------|-----------------|---------|----------|----------|
| circuits | Keying | Model No. | Α | В | Q'ty/box |
| 12 | _ | BC12B-F35DK-GGR | 25.40 | 32.48 | 56 |
| 20 | _ | BC20B-F35DK-GGR | 45.72 | 52.80 | 32 |

Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label. Note: Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

Header (Side entry type)

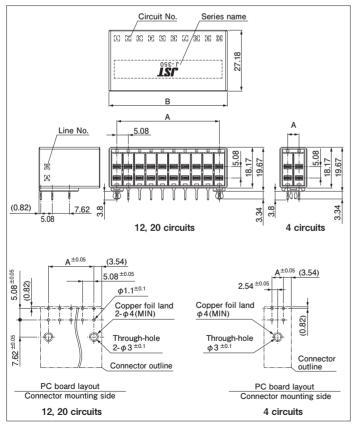

| No. of | Varina | Model No. | Dimensi | O'ty/bay | |
|----------|--------|-----------------|---------|----------|----------|
| circuits | Keying | woder No. | Α | В | Q'ty/box |
| 4 | _ | SC04B-F35DK-GGR | 5.08 | 12.16 | 152 |
| 12 | _ | SC12B-F35DK-GGR | 25.40 | 32.48 | 56 |
| 20 | _ | SC20B-F35DK-GGR | 45.72 | 52.80 | 32 |

Material and Finish


Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

Note: Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

J300 SERIES/KEYING BLOCK

Keying block

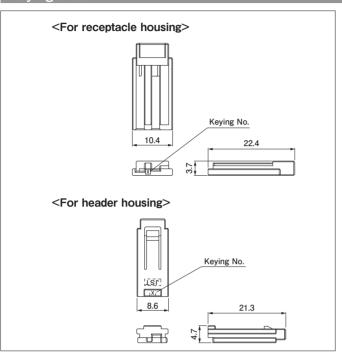

| | Keying | Model No. | Q'ty/bag |
|------------------------|--------|-----------|----------|
| | Х | J3KF-VR-X | 1,000 |
| For receptacle housing | Y | J3KF-VY-Y | 1,000 |
| For receptacle nousing | Z | J3KF-VE-Z | 1,000 |
| | W | J3KF-VS-W | 1,000 |
| | Х | J3KM-VR-X | 1,000 |
| For header housing | Y | J3KM-VY-Y | 1,000 |
| Tof fleader flousing | Z | J3KM-VE-Z | 1,000 |
| | W | J3KM-VS-W | 1,000 |

Material and Finish

Glass-filled PBT, UL94V-0, X-Keying (red), Y-Keying (yellow), Z-Keying (blue), W-Keying (white)

RoHS2 compliance

Note: Unlisted in UL / TÜV.

Features


Mis-mating prevention keying block can be freely mounted to keying block space.

- 16 types of keying can be provided by mounting 4 types of keying block to 2 keying block spaces.
- Since a color varies on each type of keying, the kind of keying is easy to recognize.

Variation of keying


| | X-Keying (red) | Y-Keying (yellow) | Z-Keying (blue) | W-Keying (white) |
|------------------------|-------------------|----------------------|--------------------|---------------------|
| For header housing | 5 | | T | |
| For receptacle housing | | | حلك | |

How to use keying block (When using J380D)

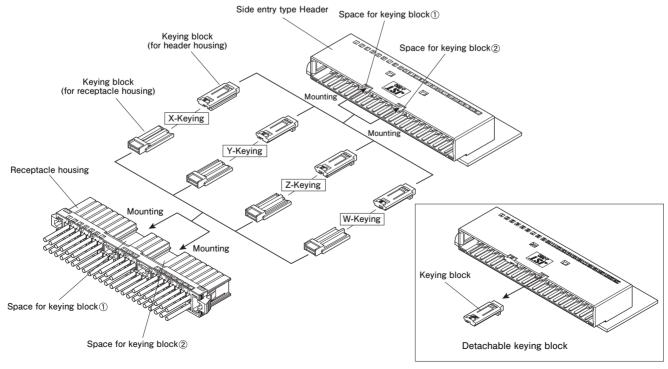


J300 SERIES/J380D (for keying block)

Assembly layout

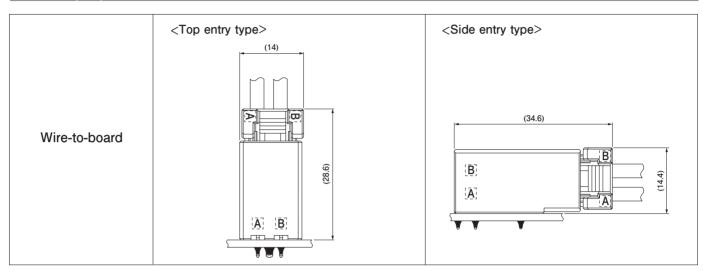

Receptacle housing

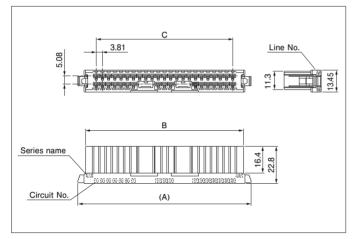

| No. of circuits | Keying | Model No. | Dim | Q'ty | | |
|-----------------|---------|---------------|-------|------|-------|------|
| circuits | Reyling | WIOGEI IVO. | Α | В | С | /bag |
| 20 | _ | F38FDS-20V-KE | 68.3 | 58.9 | 45.72 | 100 |
| 40 | _ | F38FDS-40V-KE | 106.4 | 97.0 | 83.82 | 60 |


Material and Finish

Glass-filled PBT, UL94V-0, black

RoHS2 compliance This product displays (LF)(AU) on a label. Note: Unlisted in UL / $T\ddot{U}V$.

J300 SERIES/J380D (for keying block)

Header (Top entry type)

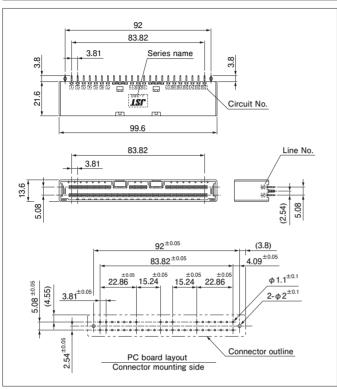

| No. of circuits | Keying | Model No. | Q'ty/box |
|-----------------|--------|-----------------|----------|
| 40 | _ | B40B-F38DK-GGER | 24 |


Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

- Note: 1. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.
 - 2. Unlisted in UL / TÜV.

Header (Side entry type)

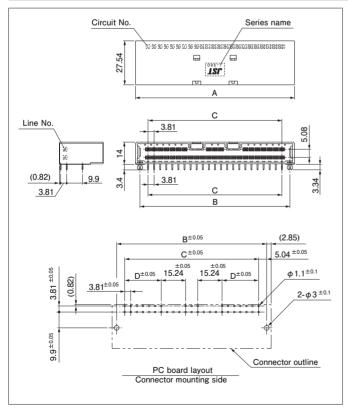


| No. of circuits | Keying | eving Model No. | | Dimensions (mm) | | | | |
|-----------------|---------|-----------------|------|-----------------|-------|-------|------|--|
| circuits | Reyling | woder ivo. | Α | В | С | D | /box | |
| 20 | _ | S20B-F38DK-GGER | 61.5 | 55.8 | 45.72 | 3.81 | 120 | |
| 40 | _ | S40B-F38DK-GGER | 99.6 | 93.9 | 83.82 | 22.86 | 72 | |

Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

- Note: 1. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.
 - 2. Unlisted in UL / TÜV.




Dual-row Common type (J350D)

Unit: A

| | | | | | C | Current | rating | (AC, | DC) | Unit: A |
|----------------------------------------------------|----------------------------------------|---------------|---------------------------------------------------------------------------------------|---------|--------|---------|----------|-------|-----|-------------------------------------|
| Receptacle | Tab | Appearance | Circuit figure | | | | e size (| | | |
| side | side | | | Circuit | Note 1 | #14 | #16 | #18 | #20 | Remark |
| Normal Receptacle hosuing | Contact for common connection Tab side | | Contact for common connection Tab side | 12 | _ | 13.0 | 11.5 | 9.5 | 7.5 | Total input current on single-row |
| lbly n | Contact for common connection Tab side | | Contact for common connection Tab side Contact for common connection Receptacle side | 12 | _ | 13.0 | 11.5 | 9.5 | 7.5 | Total input current on all circuits |
| g asserr nnectio | | Header Header | Contact for common connection Receptacle side | 4 | 11.25 | 11.25 | 11.25 | 10.0 | 8.0 | |
| Receptacle hosuing assembly with common connection | Header | | | 12 | 8.25 | 8.25 | 8.25 | 7.75 | 6.0 | _ |
| ceptacle | | | | 20 | 8.0 | 8.0 | 8.0 | 7.25 | 6.0 | |
| Re | Tab housing | | Contact for common connection Receptacle side Tab contact | 12 | _ | 8.25 | 8.25 | 7.75 | 6.0 | _ |

· Rationalization of wiring is realized by the common connection inside the connector

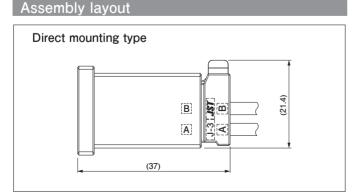

*When mating with receptacle housing (2-circuit)

Specifications -

- · Current rating: Refer to the above table.
- Voltage rating: 600 V AC/DC
- · Temperature range: -55°C to +105°C

(including temperature rise in applying


electrical current)

Note: Use only receptacle housing assembly with common cnnection.


Contact resistance: Initial value/ $10~\text{m}\Omega$ max.

After environmental tests/ 20 m Ω max.

- · Insulation resistance: 1,000 M Ω min.
- · Withstanding voltage: 2,200 VAC/minute
- · Applicable wire: AWG #28 to #14
- * In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).
- * Dimensional unit: mm
- * RoHS2 Compliance
- * Contact JST for details.

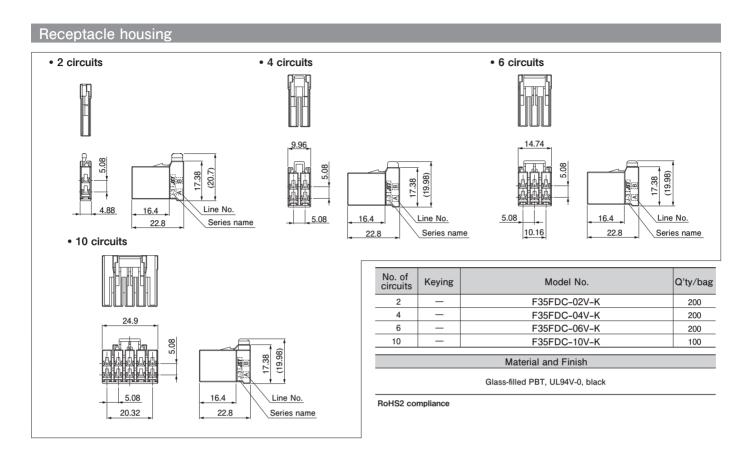

Receptacle housing assembly with common connection

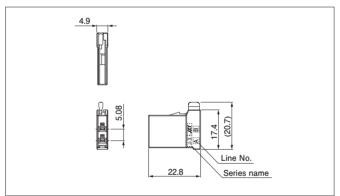

| No. of circuits | Keying | Model No. | Q'ty/box |
|-----------------|--------|----------------------|----------|
| _ | - | F35FDC-00(2-A1D)V-EC | 700 |
| | | | |


Material and Finish

Contact for common connection: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, blue


RoHS2 compliance

Note: 1. Contact JST about 0.76 μm gold-plated product and tin-plated product.

2. Unlisted in UL / TÜV.

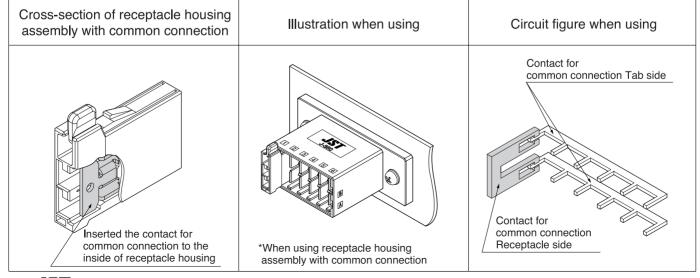

Tab housing Assembly

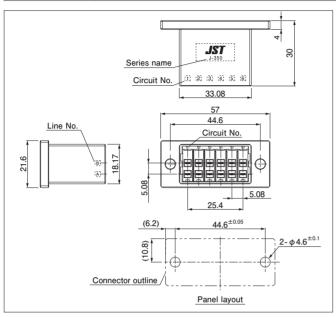

| No. of circuits | Keying | Model No. | Q'ty/box |
|-----------------|--------|-----------------|----------|
| 12 | _ | P12B-F35DK-GFAR | 196 |

Material and Finish


Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Note: 1. Punch holes in the panel. Burrs must be removed.

- The strength of the panel must be considered when punching two or more holes.
- $\ensuremath{\mathrm{3.}}$ The connector must be inserted from the same side as the hole is punched.
- 4. Contact JST about $0.76\mu m$ gold-plated product and tin-plated product.
- 5. Refer to the top page of J350D (Common type) for circuit figure.

Tab housing (Free hanging type)

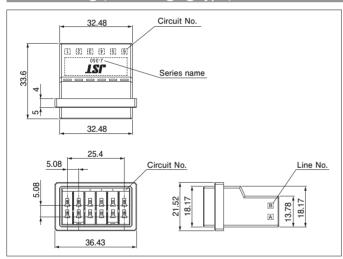


| No. of circuits | Keying | Model No. | Q'ty/box | | | | | |
|-----------------|--------|--------------|----------|--|--|--|--|--|
| 12 | _ | F35MDF-12V-K | 50 | | | | | |
| Makadal | | | | | | | | |

Glass-filled PBT, UL94V-0, black

RoHS2 compliance Note: Unlisted in TÜV.

Tab housing (Panel mounting type)

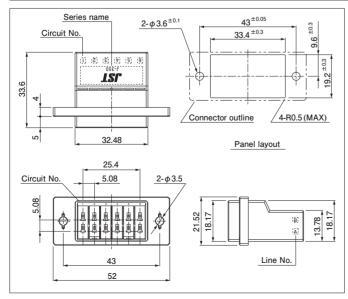

| No. of circuits | Keying | Model No. | Q'ty/box |
|-----------------|--------|--------------|----------|
| 12 | _ | F35MDP-12V-K | 41 |

Material and Finish


Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Note: 1. Punch holes in the panel. Burrs must be removed.

- 2. The strength of the panel must be considered when punching two or more holes.
- 3. The connector must be inserted from the same side as the hole is punched.
- 4. Unlisted in TÜV.

Header (Top entry type)

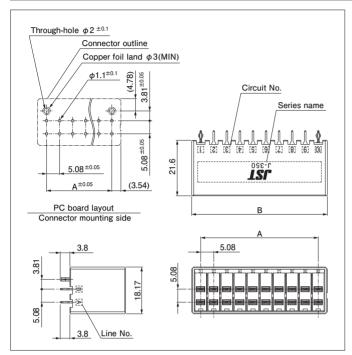


| No. of circuits | Keying | Caving Madel No | | Dimensions (mm) | | |
|-----------------|---------|-----------------|-------|-----------------|----------|--|
| circuits | Reyling | Model No. | Α | В | Q'ty/box | |
| 12 | _ | BC12B-F35DK-GGR | 25.40 | 32.48 | 56 | |
| 20 | _ | BC20B-F35DK-GGR | 45.72 | 52.80 | 32 | |

Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label. Note: Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.

Header (Side entry type)

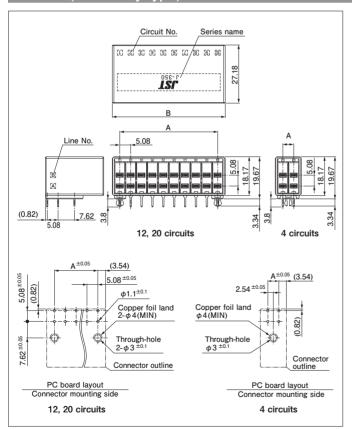

| No. of | Variation. | Madal Na | Dimensi | O24/b.a | |
|----------|------------|-----------------|---------|---------|----------|
| circuits | Keying | Model No. | Α | В | Q'ty/box |
| 4 | _ | SC04B-F35DK-GGR | 5.08 | 12.16 | 152 |
| 12 | _ | SC12B-F35DK-GGR | 25.40 | 32.48 | 56 |
| 20 | _ | SC20B-F35DK-GGR | 45.72 | 52.80 | 32 |

Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black Reinforcement: Copper alloy, nickel-undercoated, selective gold-plated

RoHS2 compliance This product displays (LF)(AU) on a label.

Note: Contact JST about 0.76 $\mu \mathrm{m}$ gold-plated product and tin-plated product.

Triple-row Common type (J360T)

| Receptacle side | Tab side | Appearance | Circuit figure |
|----------------------------------------------------------|---------------------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------|
| otacle housing | Contact for common connection Tab side (Panel mounting type) | Contact for common connection Tab side (Panel mounting type) | Contact for common connection Tab side |
| Normal Receptacle housing | Contact for common connection Tab side (Direct mounting type) | | |
| Receptacle housing assembly with common connection | Contact for common connection Tab side (Direct mounting type) | | Contact for common connection Tab side Contact for common connection Receptacle side |

· Rationalization of wiring is realized by the common connection inside the connector

Specifications

· Current rating: AC/DC

Unit: A

| | Wire size (AWG) | | | | |
|------------------------------------------------------------------------------------------|-----------------|------|------|-----|--|
| | #14 #16 | | | | |
| Receptacle housing (Total input current on single-row) | 12.0 | 10.5 | 8.5 | 6.5 | |
| Receptacle housing assembly with common connection (Total input current on all circuits) | 15.0 | 13.5 | 11.5 | 9.5 | |

- · Voltage rating: 600 V AC/DC
- · Temperature range: -55°C to +105°C

(including temperature rise in applying electrical current)

- Contact resistance: Initial value/ 10 mΩ max.
 - After environmental tests/ 20 m Ω max.
- · Insulation resistance: 1,000 MΩ min.


(When using receptacle housing)


· Withstanding voltage: 2,200 VAC/minute

(When using receptacle housing)

- · Applicable wire: AWG #28 to #14
- * In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).
- * Dimensional unit : mm
- * RoHS2 Compliance
- * Contact JST for details.


Assembly layout

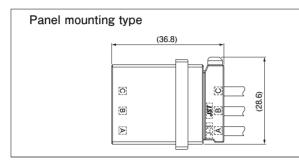

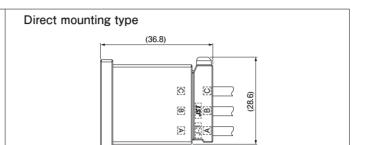

*When mating with receptacle housing (3-circuit)

Receptacle housing

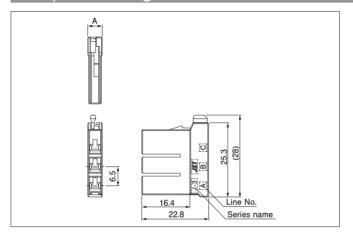


| No. of circuits | Keying | Model No. | Dimensions (mm) | Q'ty/ bag |
|-----------------|--------|--------------|-----------------|--------------|
| 3 | - | F36FTC-03V-K | 4.9 | 200 |
| 9 | - | F36FTC-09V-K | 15.0 | - |
| 18 | - | F36FTC-18V-K | 30.3 | - |
| 24 | - | F36FTC-24V-K | 41.2 | 60 |

Material and Finish
Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Note: 9, 18, and 24-circuit products are not approved by UL / TÜV standards.

Receptacle housing assembly with common connection

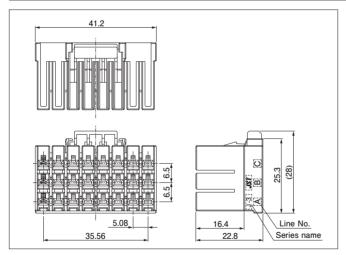

| No. of circuits | Model No. | Q'ty/bag |
|-----------------|-----------------------|----------|
| 21 | F36FTC-21(24-C8T)V-KC | 60 |


Material and Finish


Contact for common connection: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Note: 1. Contact JST about 0.76 μm gold-plated product.


2. Unlisted in UL / TÜV.






Inserted the contact for common connection to the right side of receptacle housing

Illustration when using




* When mating with receptacle housing assemby with common connection

Circuit figure wten using Contact for common connection Tab side



Common tab housing Assembly

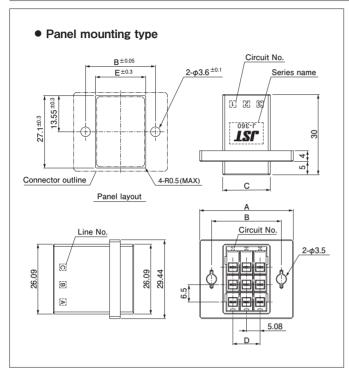

| No. of | Keying | Model No. | | Dimensions (mm) | | | Q'ty | |
|----------|--------|----------------|------|-----------------|------|-------|------|------|
| circuits | Keying | Model No. | Α | В | С | D | Е | /box |
| 9 | _ | P09B-F36TK-GFR | 35.0 | 26.1 | 17.8 | 10.16 | 18.8 | 364 |
| 18 | _ | P18B-F36TK-GFR | 50.2 | 41.3 | 33.1 | 25.40 | 34.1 | 224 |


Material and Finish

Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black

RoHS2 compliance

Note: 1. Punch holes in the panel. Burrs must be removed.

- 2. The strength of the panel must be considered when punching two or more holes.
- $3. \ \mbox{The connector must be inserted from the same side as the hole is punched.}$
- 4. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.
- 5. Refer to the top page of J360T (Common type) for circuit figure.

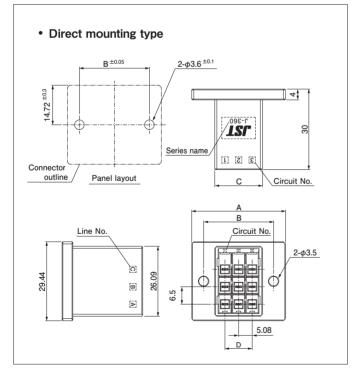

| No. of circuits Keying | | ving Model No. | Dimensions (mm) | | | | Q'ty |
|------------------------|----------------------|-----------------|-----------------|------|------|-------|------|
| circuits | its Keying Model No. | Model No. | Α | В | С | D | /box |
| 9 | _ | P09B-F36TK-GFAR | 35.0 | 26.1 | 17.8 | 10.16 | 364 |
| 18 | _ | P18B-F36TK-GFAR | 50.2 | 41.3 | 33.1 | 25.40 | 224 |
| 24 | _ | P24B-F36TK-GFAR | 60.4 | 51.5 | 43.2 | 35.56 | 168 |

Material and Finish


Tab contact: Copper alloy, nickel-undercoated, selective gold-plated Housing: Glass-filled PBT, UL94V-0, black


RoHS2 compliance

Note: 1. Punch holes in the panel. Burrs must be removed.

- 2. The strength of the panel must be considered when punching two or more holes.
- 3. The connector must be inserted from the same side as the hole is punched.
- 4. Contact JST about $0.76\,\mu m$ gold-plated product and tin-plated product.
- The directions such as series names of 24-circuit product are different from 9 and 18-circuit products.
- 6. 24-circuit product is not approved by UL standard.
- 7. Refer to the top page of J360T (Common type) for circuit figure.

Model number allocation

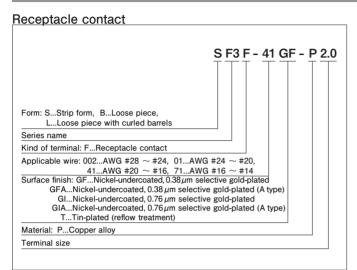

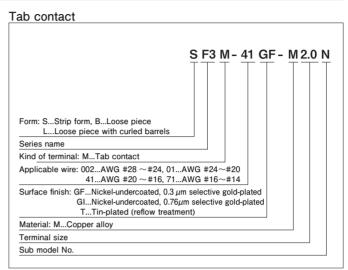

F31 FSS-03 V-KX Series name Type of connector: F...Receptacle housing FR...Receptacle housing Reverse type Rows: S...Single-row, D....Dual-row with 5.08 mm line pitch M...Double-row with 7.62 mm line pitch

T...Triple-row, F....Quadruple-row


Mounting arrangement: S...Side locking, C...Center locking, PA...Panel mounting type No. of circuits: 1 \sim 6, 8 \sim 10, 12, 16, 18, 20, 24, 30, 40


Flammability: V...UL94V-0

Receptacle housing

Color indication: K...Black, S...White, E...Blue, M...Green

Keying: X...X-Keying, Y...Y-Keying, Z...Z-Keying, W...W-Keying, XX...XX-Keying, YY...YY-Keying, XY...XY-Keying, Blank...Without Keying No. E...Space (2 spaces) for Keying block

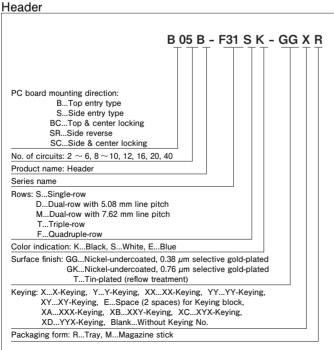

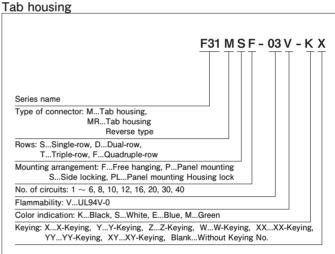

Common tab housing assembly

Model number allocation

Flammability: V...UL94V-0

Color indication: K...Black, E...Blue, M...Green

Surface finish of assembled short circuit terminal


F36 FTC-21 (24-C8T) V-KC Series name Type of connector: F...Receptacle housing Rows: D...Dual-row, T...Triple-row Mounting arrangement: C...Center locking The number of receptacle contact that can be mounted to the housing:: 00, 21 Indication of Common:

PC board mounting direction: Panel mounting type
No. of circuits • Assembly: 9, 12, 18, 24
Series name: F35D...J350D, F36T...J360T
Color indication: K...Black, M...Green
Surface finish: GF...Nickel-undercoated, 0.38 µm selective gold-plated
G1...Nickel-undercoated, 0.76 µm selective gold-plated
Mounting arrangement: A...Direct mounting type,
AN...Direct mounting without housing cover type
Blank...Panel mounting type
Packaging form: R...Tray

: C...Nickel-undercoated, 0.38 µm selective gold-plated : D...Nickel-undercoated, 0.76 µm selective gold-plated


2-A1D...Common circuit is set to No. 1 circuit at each row of A and B.

24-C8T...Common circuit is set to No. 8 circuit at each row of A, B and C.

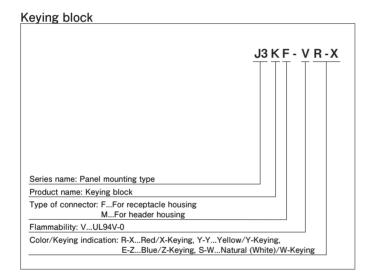




JFA CONNECTOR J300 SERIES PROTECTOR

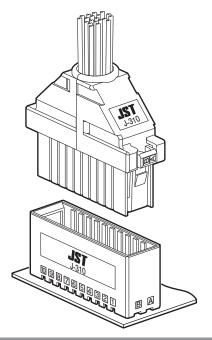

When applying a current to the connector, the protector prevents foreign substances being inserted into mating part from the wiring side. However it has no function of holding the wire securely.

Note: Protector is unlisted in UL.

J300 Series

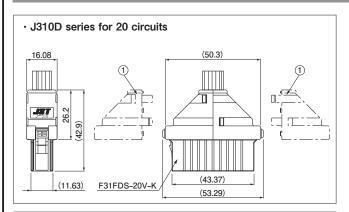


| No. | Model No. | Color | Q'ty/box | | |
|---------------------|-------------|-------------|----------|--|--|
| 1 | F31PFD-20VK | Black | 112 | | |
| | F31PFD-20SC | Transparent | 112 | | |
| | | | | | |
| Material and Finish | | | | | |

Black: Glass-filled PBT Transparent: Polycarbonate

RoHS2 compliance


Note: Two protectors of the same color are used.

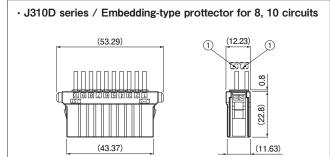

| No. | Model No. | Color | Q'ty/box | | |
|---------------------|-------------|-------|----------|--|--|
| 1 | F31PFS-10KU | Black | 1,000 | | |
| Material and Finish | | | | | |
| Glass-filled PBT | | | | | |

RoHS2 compliance

Note: Cut the protector according to the number of circuits before use.

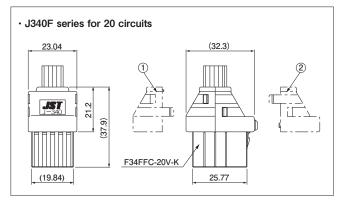

| No. | Model No. | Color | Q'ty/box |
|-----|--------------|-------------|----------|
| 1 | F34PFF-20VKA | Black | 80 |
| 1 | F34PFF-20SCA | Transparent | 80 |
| 2 | F34PFF-20VKB | Black | 80 |
| | F34PFF-20SCB | Transparent | 80 |
| | | | |

Material and Finish Black: Glass-filled PBT Transparent: Polycarbonate

RoHS2 compliance

Note: Use the same color for protector 1 and 2.