ON Semiconductor

Is Now

Onsemi

To learn more about onsemi[™], please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product factures, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and asfety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or by customer's technical experts. onsemi products and actal performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiari





ON Semiconductor®

FDS6681Z

30 Volt P-Channel PowerTrench[®] MOSFET General Description


This P-Channel MOSFET is produced using ON Semiconductor's advanced PowerTrench[®] process that has been especially tailored to minimize the on-state resistance.

This device is well suited for Power Management and load switching applications common in Notebook Computers and Portable Battery Packs.

Features

- -20 A, -30 V. $R_{DS(ON)} = 4.6 \text{ m}\Omega @ V_{GS} = -10 \text{ V}$ $R_{DS(ON)} = 6.5 \text{ m}\Omega @ V_{GS} = -4.5 \text{ V}$
- + Extended V_{GSS} range (–25V) for battery applications
- HBM ESD protection level of 8kV typical (note 3)
- High performance trench technology for extremely low R_{DS(ON)}
- High power and current handling capability
- Termination is Lead-free and RoHS Compliant





Absolute Maximum Ratings $T_A=25^{\circ}C$ unless otherwise noted

Symbol		Parameter		Ratings	Units
V _{DSS}		ource Voltage		-30	V
V _{GSS}	Gate-So	urce Voltage		±25	V
I _D	Drain Cu	urrent – Continuous	(Note 1a)	-20	A
		- Pulsed		-105	
> _D	Power D	issipation for Single Operation	(Note 1a)	2.5	W
			(Note 1b)	1.2	
			(Note 1c)	1.0	
T _J , T _{stg}	Operatin	g and Storage Junction Temper	ature Range	-55 to +150	°C
Therma	al Chara	acteristics			
		acteristics Resistance, Junction-to-Ambier	nt (Note 1a)	50	°C/W
Therma R _{0JA} R _{0JC}	Thermal		Note 1a) (Note 1)	50 25	°C/W
ર _{θJA} ર _{θJC}	Thermal Thermal ge Mark	Resistance, Junction-to-Ambier Resistance, Junction-to-Case ing and Ordering Int	(Note 1)		

©2005 Semiconductor Components Industries, LLC. October-2017, Rev. 2

Publication Order Number: FDS6681Z/D

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Off Chara	acteristics				1	
BV _{DSS}	Drain–Source Breakdown Voltage	$V_{GS} = 0 V$, $I_D = -250 \mu A$	-30			V
ΔBV _{DSS} ΔTJ	Breakdown Voltage Temperature Coefficient	$I_D = -250 \ \mu$ A, Referenced to 25°C		-26		mV/°C
I _{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = -24 V, V_{GS} = 0 V$			-1	μA
I _{GSS}	Gate-Body Leakage	$V_{GS} = \pm 25 \text{ V}, V_{DS} = 0 \text{ V}$			±10	μA
On Chara	Acteristics (Note 2)					
V _{GS(th)}	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_{D} = -250 \ \mu A$	-1	-1.8	-3	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate Threshold Voltage Temperature Coefficient	$I_D = -250 \ \mu$ A, Referenced to 25° C		6		mV/°C
$R_{\text{DS(on)}}$	Static Drain–Source On–Resistance	$ \begin{array}{l} V_{GS} = -10 \ V, \ \ I_D = -20 \ A \\ V_{GS} = -4.5 \ V, \ \ I_D = -17 \ A \\ V_{GS} = -10 \ V, \ \ I_D = -20 \ A, \\ T_J = 125^{\circ} C \end{array} $		3.8 5.2 5.0	4.6 6.5 6.3	mΩ
g _{FS}	Forward Transconductance	$V_{DS} = -5 V$, $I_D = -20 A$		79		S
Dvnamic	Characteristics					
C _{iss}	Input Capacitance	$V_{DS} = -15 V$, $V_{GS} = 0 V$,		7540		pF
C _{oss}	Output Capacitance	f = 1.0 MHz		1400		pF
C _{rss}	Reverse Transfer Capacitance	7		1120		pF
Switchin	G Characteristics (Note 2)					
t _{d(on)}	Turn–On Delay Time			20	35	ns
tr	Turn–On Rise Time			9	18	ns
t _{d(off)}	Turn–Off Delay Time	7		660	1060	ns
t _f	Turn–Off Fall Time	7		380	610	ns
Q _{g(TOT)}	Total Gate Charge at $V_{GS} = -10V$	$V_{DS} = -15 \text{ V}, I_{D} = -20 \text{ A}$		185	260	nC
Q _{g(TOT)}	Total Gate Charge at $V_{GS} = -5V$			105	150	nC
Q_{gs}	Gate-Source Charge			26		nC
Q _{gd}	Gate-Drain Charge			47		nC


FDS6681Z

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Drain-So	ource Diode Characteristics a	nd Maximum Ratings				
Is	Maximum Continuous Drain-Source	Diode Forward Current			-2.1	А
V _{SD}	Drain–Source Diode Forward Voltage	$V_{GS} = 0 V$, $I_S = -2.1 A$ (Note 2)		-0.7	-1.2	V
t _{RR}	Reverse Recovery Time	$I_{F} = -20 A,$		125		ns
Q _{RR}	Reverse Recovery Charge	dI _F /dt = 100 A/µs (Note 2)		94		nC
. R _{eja} is the su	im of the junction-to-case and case-to-ambient them	mai resistance where the case thermal reference is	defined as	the solder n	nounting su	inface of the
drain pins. R ແມ	$R_{\theta,\text{DC}}$ is guaranteed by design while $R_{\theta,\text{CA}}$ is determine	ed by the user's board design.			-	


Scale 1 : 1 on letter size paper

2. Pulse Test: Pulse Width < 300 $\mu s,$ Duty Cycle < 2.0%

3. The diode connected between the gate and source serves only as protection against ESD. No gate overvoltage rating is implied.

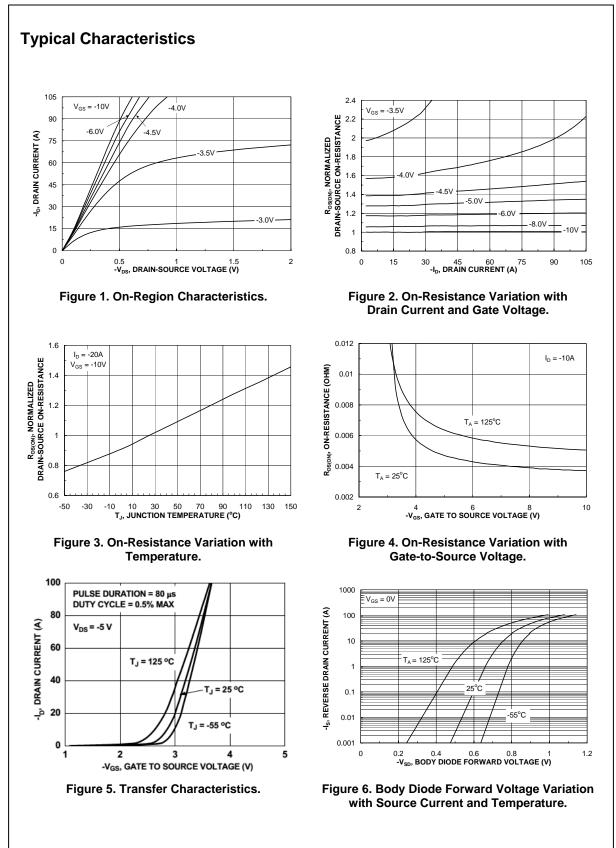

FDS6681Z

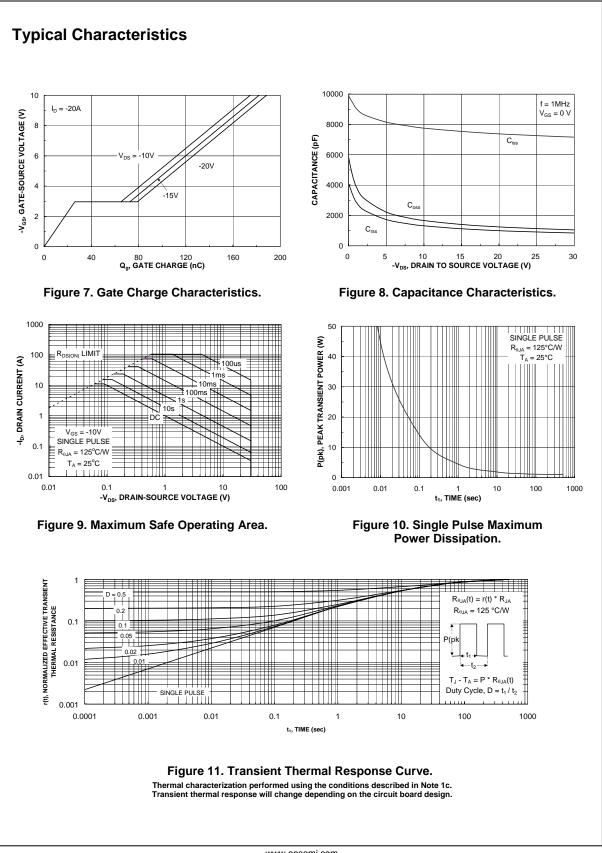

FDS6681Z

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such uninten

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative