

#### 20V,300mA,2uA, CMOS LDO Regulator

#### **Features**

- · Low power consumption
- · Low voltage drop
- · Low temperature coefficient
- · High input voltage up to 20V
- Output voltage accuracy: tolerance  $\pm 2\%$
- · Over current protection
- SOT23-3LSOT89-3 Package Available

#### **General Descrition**

The TPMCP1703T device series are low power high voltage regulators implemented in CMOS technology which have the advantages of low voltage drop and low quiescent current. They allow input voltages as high as 20V. They are available with several fixed output voltages ranging from 2.1V to 5.0V. The softstart function inhibits the problem of output overshoot during power on.

#### www.sot23.com.tw

#### **Applications**

- · Battery-powered equipment
- Communication equipment
- Audio/Video equipment


Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain variable voltages and currents.

### **Ordering Information**

# TPMCP1703T-3302E/CB

MB:SOT89-3 Package CB:SOT23-3L Package

#### Marking Information





S0T89-3

is Logo XXXX: Marking ID


Output voltage: 12=1.2V 15=1.5V 18=1.8V 30=3.0V 33=3.3V 50=5.0V



www.sot23.com.tw


20V,300mA,2uA, CMOS LDO Regulator

### **PIN CONFIGURATION**

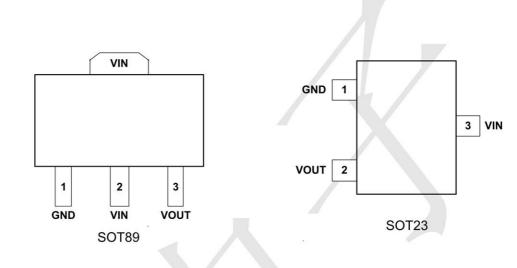

Pin Function
Power Input Voltage
Ground
Output Voltage

### **Typical Application Circuit**

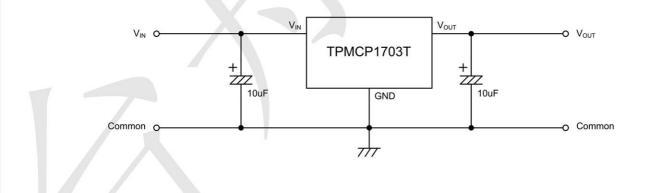




20V,300mA,2uA, CMOS LDO Regulator

www.sot23.com.tw

### **BLOCK DIAGRAM**

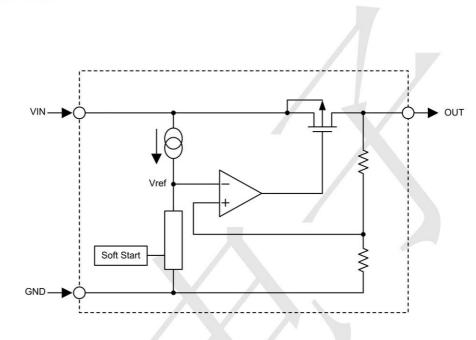

### **Absolute Maximum Ratings**

Parameter		Value	Unit
V <sub>IN</sub>		-0.3 to +24	V
Operating Temperature Range, Ta	-40 to +85	°C	
Maximum Junction Temperature, T <sub>J(MAX)</sub>	+150	°C	
Storage Temperature Range	-65 to +165	°C	
Junction-to-Ambient Thermal Resistance, $\theta_{JA}$	SOT23	200	°C/W
	SOT89-3	500	°C/W
	SOT23	0.20	W
Power Dissipation, P <sub>D(MAX)</sub>	SOT89-3	0.50	w

Note:  $P_{D(MAX)}$  is measured at  $T_a = 25^{\circ}C$ 

### **Recommended Operating Range**

Parameter	Value	Unit	
V <sub>IN</sub>	V <sub>out</sub> +2 to 24	V	



www.sot23.com.tw

20V,300mA,2uA, CMOS LDO Regulator

#### Electrical Characteristics

# **+3.3V Output** Ta=25°C

Symbol	Parameter	Test Conditions		Тур.	Max.	Unit
Vin	Input Supply Voltage	_	-	7-1	20	V
Vout	Output Voltage VIN=VOUT+1V IOUT=40mA		3.201	3.300	3.399	V
Іоит	Output Current	V <sub>IN</sub> =V <sub>OUT</sub> +1V V <sub>OUT</sub> ≥2.97V	300	(	-	mA
Δ Vout	Load Regulation	V <sub>IN</sub> =V <sub>OUT</sub> +1V 1mA ≤Iout≤80mA	_	45	90	mV
VDIF	Voltage Drop(Note)	IOUT =40mA, $\Delta$ Vo=2%	—	90	-	mV
Iss	Current Consumption	无负载	-	2	3	uA
$\frac{\bigtriangleup \text{VOUT}}{\bigtriangleup \text{VIN} \times \text{VOUT}}$	Line Regulation	Vo+1V≤ViN≤18V Iout=40mA	_	0.2	0.4	%/V
$\frac{\triangle \text{VOUT}}{\triangle \text{Ta}}.$	Temperature Co efficient	V <sub>IN</sub> =V <sub>OUT</sub> +1V I <sub>OUT</sub> =40mA -40°C <ta<85°c< td=""><td>-</td><td>±0.7</td><td>-</td><td>mV/°C</td></ta<85°c<>	-	±0.7	-	mV/°C

#### +5.0V Output Ta=25°C


Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
Vin		-			20	V
Vout	Output Voltage	V <sub>IN</sub> =V <sub>OUT</sub> +1V Iout=40mA	4.85	5	5.150	v
Іоит	Output Current	V <sub>IN</sub> =V <sub>OUT</sub> +1V V <sub>OUT</sub> ≥4.5V	300	-		mA
Δ Vout	Load Regulation	$V_{IN}=V_{OUT}+1V$ $1mA \leq I_{OUT}\leq 100mA$	_	45	90	mV
Vdif	Voltage Drop(Note)	Iour =40mA, $\Delta$ Vo=2%	-	60		mV
Iss	Current Consumption	$I_{OUT} = 0mA$	—	2	3	uA
$\frac{\bigtriangleup \text{VOUT}}{\bigtriangleup \text{VIN} \times \text{VOUT}}$	Line Regulation	Vo+1V≤Vin≤18V Iout=40mA	-	0.2	0.3	%/V
$\frac{\triangle \text{VOUT}}{\triangle \text{Ta}}.$	Temperature Co efficient	V <sub>IN</sub> =V <sub>OUT</sub> +1V Iou⊤=80mA -40°C <ta<85°c< td=""><td>-</td><td>±0.7</td><td>-</td><td>mV/℃</td></ta<85°c<>	-	±0.7	-	mV/℃



www.sot23.com.tw

20V,300mA,2uA, CMOS LDO Regulator

Package informantion SOT89-3

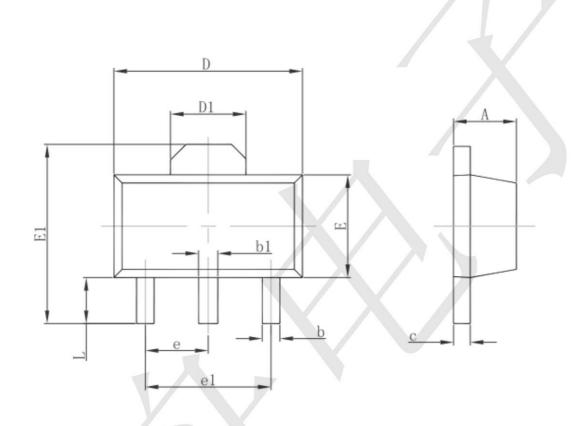

Symbol	Dimensions	In Millimeters	Dimensions In Inches			
	Min.	Max.	Min.	Max.		
A	1.400	1.600	0.055	0.063		
b	0.320	0.520	0.013	0.020		
b1	0.400	0.580	0.016	0.023		
С	0.350	0.440	0.014	0.017		
D	4.400	4.600	0.173	0.181		
D1	1.550 REF.		0.061 REF.			
E	2.300	2.600	0.091	0.102		
E1	3.940	4.250	0.155	0.167		
е	1.500 TYP.		0.060	TYP.		
e1	3.000	TYP. 0.118 TYP.		3.000 TYP.		TYP.
L	0.900	1.200	0.035	0.047		




www.sot23.com.tw

20V,300mA,2uA, CMOS LDO Regulator

### Package informantion

#### 3-pin SOT23-3 Outline Dimensions

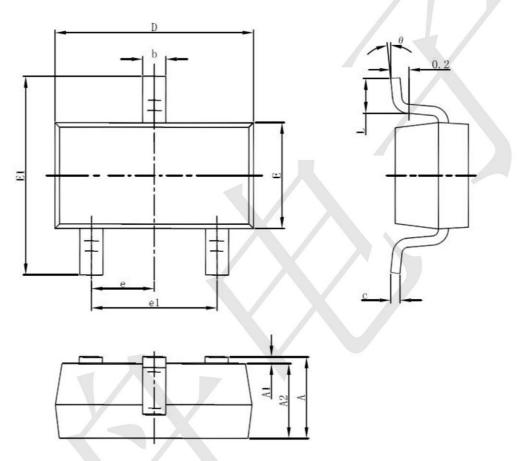

Cumbral	Dimensions In	Millimeters	Dimensions	In Inches
Symbol	Min	Max	Min	Max
Α	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
C	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
е	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°