

SR320 THRU SR3200

SCHOTTKY BARRIER RECTIFIERS


FEATURES

- \cdot High current capability
- \cdot High surge current capability
- \cdot Low forward voltage drop
- \cdot Exceeds environmental standards of MIL-S-19500/228
- \cdot For use in low voltage, high frequency inverters
- free wheeling, and porlarlity protection applications

MECHANICAL DATA

Case: Molded plastic, DO-201AD Epoxy: UL 94V-O rate flame retardant Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed Polarity: Color band denotes cathode end Mounting position: Any Weight: 0.04ounce, 1.1gram

DO-201AD(DO-27)

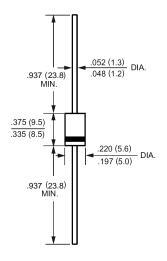

Dimensions in inches and (millimeters)

广东钜兴电子科技有限公司

Maximum Ratings and Electrical Characteristics

Ratings at 25 ambient temperature unless otherwise specified. Single phase, half wave, $60H_Z$, resistive or inductive load. For capacitive load, derate current by 20%.

	Symbols	SR320	SR340	SR350	SR360	SR380	SR3100	SR3150	SR3200	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	40	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V _{RMS}	14	28	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V _{DC}	20	40	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current	I(AV) 3.0									
.375"(9.5mm) Lead Length	I _(AV)			5.0						Атр
Peak Forward Surge Current,										
8.3ms single half-sine-wave	I _{FSM} 80								Amp	
superimposed on rated load (JEDEC method)										
Maximum Forward Voltage at 3.0A DC and 25	V _F	0.55		0.70		0.85		0.95		Volts
Maximum Reverse Current at T _A =25	г	0.5								mAmn
at Rated DC Blocking Voltage T _A =100	I _R		30							mAmp
Typical Junction Capacitance (Note 1)	CJ	300 250						pF		
Typical Thermal Resistance (Note 2)	R _{0JA}	40								/W
Operating Junction Temperature Range	TJ	-55 to +125 -55 to +150								
Storage Temperature Range	Tstg	-55 to +150								

G

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.


2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted





SR320 THRU SR3200 SCHOTTKY BARRIER RECTIFIERS


RATINGS AND CHARACTERISTIC CURVES


FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

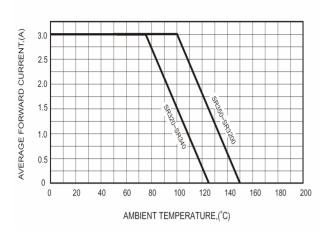


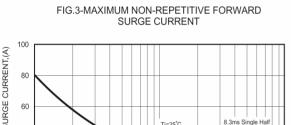

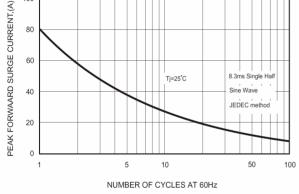

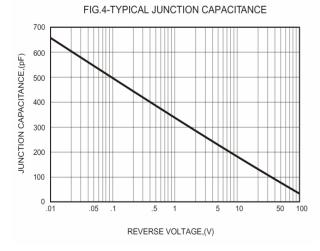

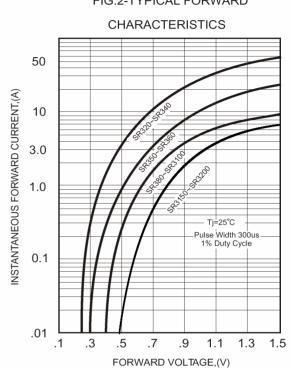

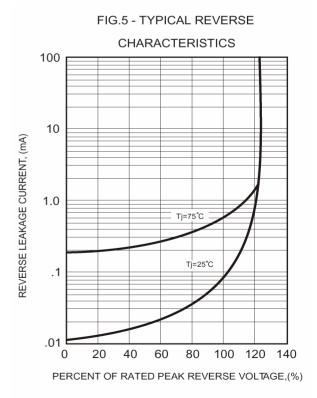

C

FIG.2-TYPICAL FORWARD