

Hex Schmitt Trigger

The HT40106A hex Schmitt Trigger is constructed with MOS P-channel and N-channel enhancement mode devices in a single monolithic structure. These devices find primary use where low power dissipation and/or high noise immunity is desired. The HT40106A may be used in place of the MC14069UB hex inverter for enhanced noise immunity or to “square up” slowly changing waveforms.

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V_{in} and V_{out} should be constrained to the range $V_{SS} \leq (V_{in} \text{ or } V_{out}) \leq V_{DD}$.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either V_{SS} or V_{DD}). Unused outputs must be left open.

Features


- Increased Hysteresis Voltage Over the MC14584B
- Supply Voltage Range = 3.0 Vdc to 18 Vdc
- Capable of Driving Two Low-power TTL Loads or One Low-power Schottky TTL Load Over the Rated Temperature Range
- Pin-for-Pin Replacement for CD40106B and MM74C14
- Can Be Used to Replace the MC14584B or MC14069UB
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

MAXIMUM RATINGS (Voltages Referenced to V_{SS})

Symbol	Parameter	Value	Unit
V_{DD}	DC Supply Voltage Range	- 0.5 to +18.0	V
V_{in}, V_{out}	Input or Output Voltage Range (DC or Transient)	- 0.5 to $V_{DD} + 0.5$	V
I_{in}, I_{out}	Input or Output Current (DC or Transient) per Pin	± 10	mA
P_D	Power Dissipation, per Package (Note 1)	500	mW
T_A	Ambient Temperature Range	- 55 to +125	°C
T_{stg}	Storage Temperature Range	- 65 to +150	°C
T_L	Lead Temperature (8-Second Soldering)	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Temperature Derating: "D/DW" Packages: -7.0 mW/°C From 65°C To 125°C

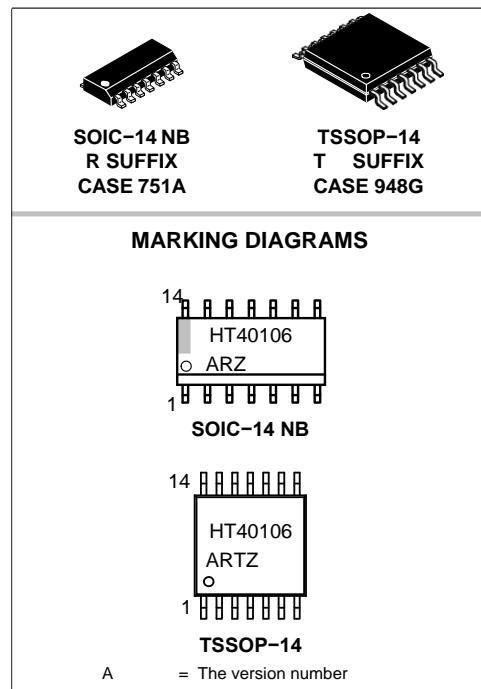

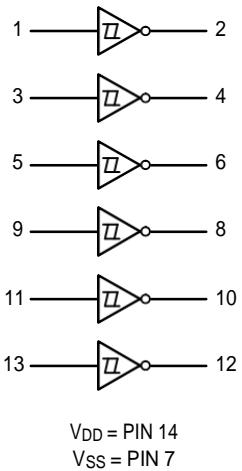



Figure 1. Logic Diagram



**Figure 2. Equivalent Circuit Schematic
(1/6 of Circuit Shown)**

ELECTRICAL CHARACTERISTICS (Voltages Referenced to V_{SS})

Characteristic	Symbol	V _{DD} Vdc	-55°C		25°C		125°C		Unit
			Min	Max	Min	Typ (Note 2)	Max	Min	
Output Voltage V _{in} = V _{DD}	V _{OL}	5.0	–	0.05	–	0	0.05	–	0.05
		10	–	0.05	–	0	0.05	–	0.05
		15	–	0.05	–	0	0.05	–	0.05
	V _{OH}	5.0	4.95	–	4.95	5.0	–	4.95	–
		10	9.95	–	9.95	10	–	9.95	–
		15	14.95	–	14.95	15	–	14.95	–
Hysteresis Voltage	V _H ⁽⁵⁾	5.0	0.3	2.0	0.3	1.1	2.0	0.3	2.0
		10	1.2	3.4	1.2	1.7	3.4	1.2	3.4
		15	1.6	5.0	1.6	2.1	5.0	1.6	5.0
Threshold Voltage Positive-Going	V _{T+}	5.0	2.2	3.6	2.2	2.9	3.6	2.2	3.6
		10	4.6	7.1	4.6	5.9	7.1	4.6	7.1
		15	6.8	10.8	6.8	8.8	10.8	6.8	10.8
	V _{T-}	5.0	0.9	2.8	0.9	1.9	2.8	0.9	2.8
		10	2.5	5.2	2.5	3.9	5.2	2.5	5.2
		15	4.0	7.4	4.0	5.8	7.4	4.0	7.4
Output Drive Current (V _{OH} = 2.5 Vdc) (V _{OH} = 4.6 Vdc) (V _{OH} = 9.5 Vdc) (V _{OH} = 13.5 Vdc)	Source	I _{OH}	5.0	-3.0	–	-2.4	-4.2	–	-1.7
			5.0	-0.64	–	-0.51	-0.88	–	-0.36
			10	-1.6	–	-1.3	-2.25	–	-0.9
			15	-4.2	–	-3.4	-8.8	–	-2.4
	Sink	I _{OL}	5.0	0.64	–	0.51	0.88	–	0.36
			10	1.6	–	1.3	2.25	–	0.9
			15	4.2	–	3.4	8.8	–	2.4
Input Current	I _{in}	15	–	±0.1	–	± 0.00001	±0.1	–	±1.0
Input Capacitance (V _{in} = 0)	C _{in}	–	–	–	–	5.0	7.5	–	–
Quiescent Current (Per Package)	I _{DD}	5.0	–	0.25	–	0.0005	0.25	–	7.5
		10	–	0.5	–	0.0010	0.5	–	15
		15	–	1.0	–	0.0015	1.0	–	30
Total Supply Current (Notes 3 & 4) (Dynamic plus Quiescent, Per Package) (C _L = 50 pF on all outputs, all buffers switching)	I _T	5.0	I _T = (1.8 μA/kHz) f + I _{DD} I _T = (3.6 μA/kHz) f + I _{DD} I _T = (5.4 μA/kHz) f + I _{DD}						μAdc
		10							
		15							

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

3. The formulas given are for the typical characteristics only at 25°C.

4. To calculate total supply current at loads other than 50 pF:

$$I_T(C_L) = I_T(50 \text{ pF}) + (C_L - 50) Vfk \quad \text{where } I_T \text{ is in } \mu\text{A (per package)}, C_L \text{ in pF}, V = (V_{DD} - V_{SS}) \text{ in volts, } f \text{ in kHz is input frequency, and } k = 0.001.$$

5. V_H = V_{T+} – V_{T-} (But maximum variation of V_H is specified as less than V_{T+ max} – V_{T- min}).

SWITCHING CHARACTERISTICS ($C_L = 50 \text{ pF}$, $T_A = 25^\circ\text{C}$)

Characteristic	Symbol	V_{DD} Vdc	Min	Typ (Note 6)	Max	Unit
Output Rise Time	t_{TLH}	5.0	—	100	200	ns
		10	—	50	100	
		15	—	40	80	
Output Fall Time	t_{THL}	5.0	—	100	200	ns
		10	—	50	100	
		15	—	40	80	
Propagation Delay Time	t_{PLH}, t_{PHL}	5.0	—	125	250	ns
		10	—	50	100	
		15	—	40	80	

6. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

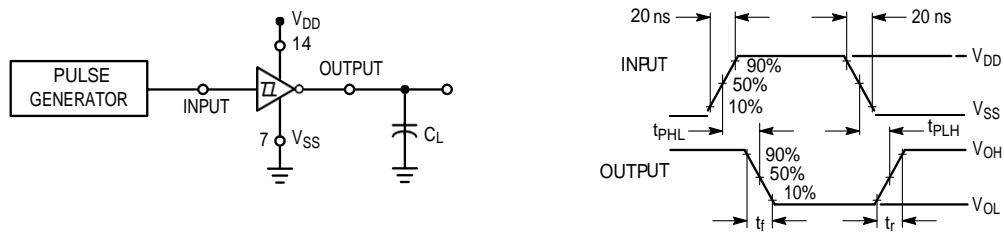


Figure 1. Switching Time Test Circuit and Waveforms

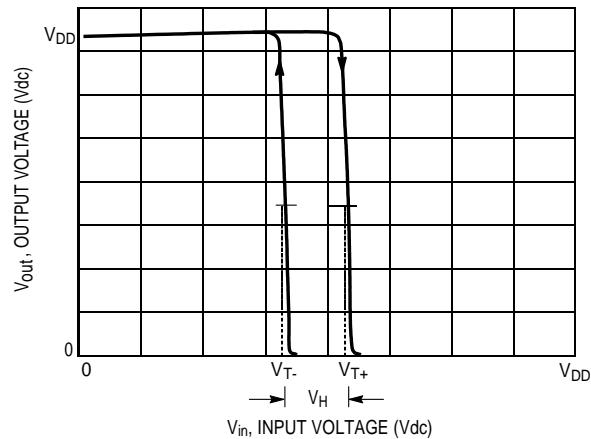
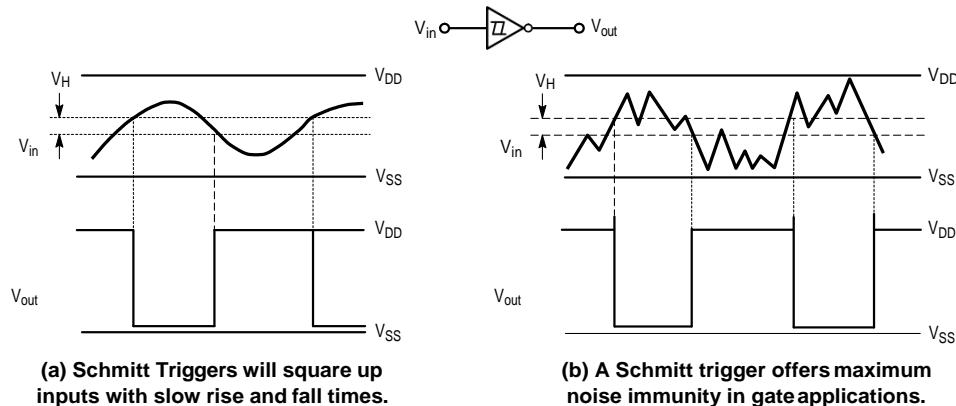
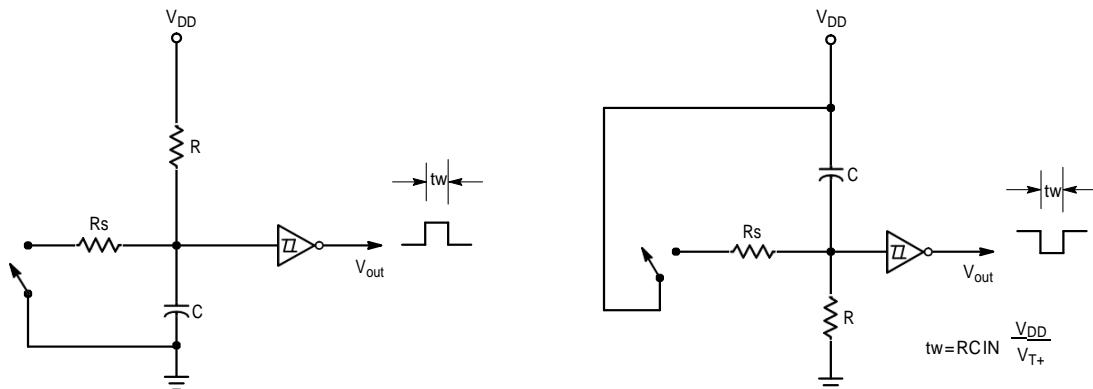
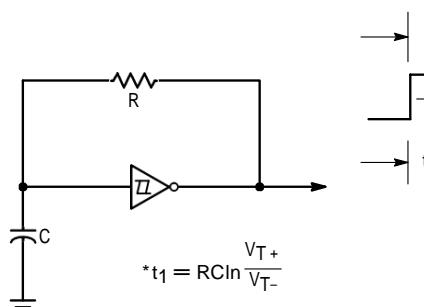


Figure 2. Typical Transfer Characteristics

APPLICATIONS

Figure 3.


Useful as Pushbutton/Keyboard Debounce Circuit.

Figure 4. Monostable Multivibrator



$$f = \frac{1}{RC} \ln \left[\left(\frac{V_{DD}}{V_{T+}} \right) \left(\frac{V_{T-}}{V_{DD} - V_{T-}} \right) \right]$$

$*t_1 + t_2 \gg t_{PHL} + t_{PLH}$

Figure 5. Astable Multivibrator

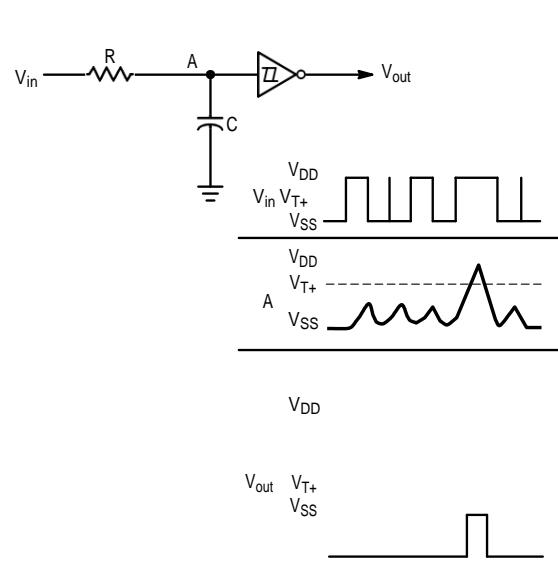


Figure 6. Integrator

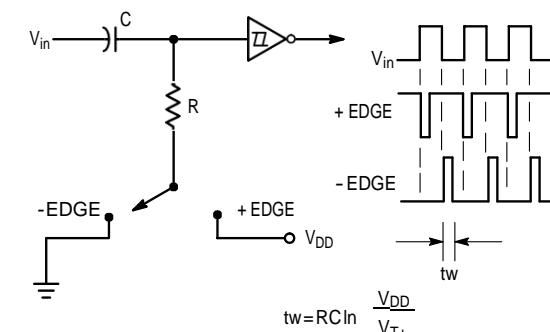


Figure 7. Differentiator

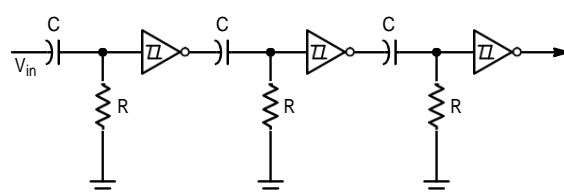
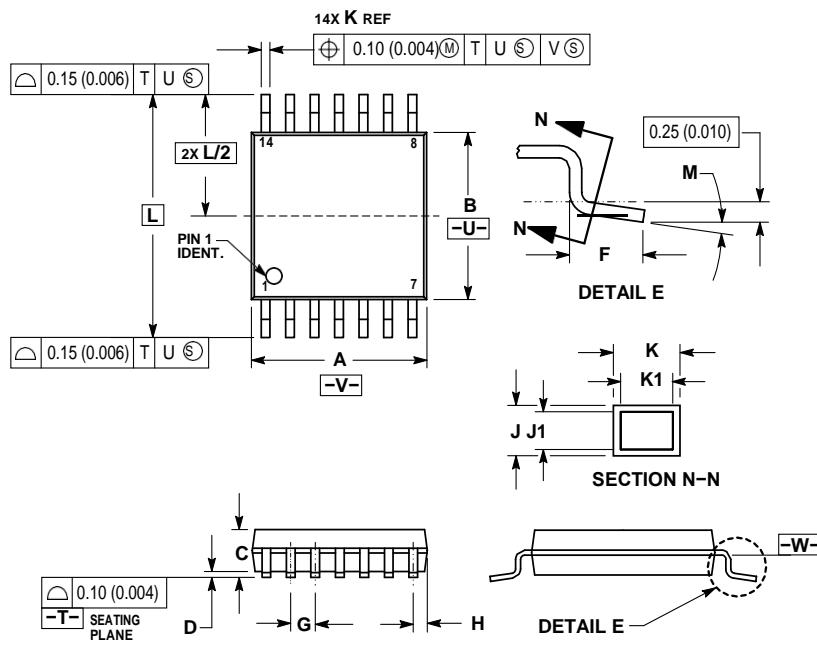
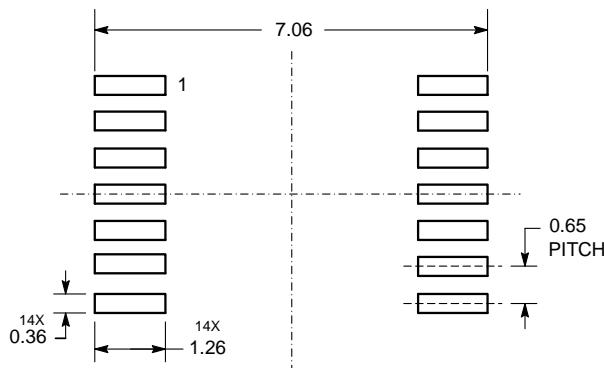


Figure 8. Positive Edge Time Delay Circuit

PACKAGE DIMENSIONS
TSSOP-14

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

	MILLIMETER	INCHES
DIM	MIN	MAX
A	4.90	5.10
B	4.30	4.50
C	---	1.20
D	0.05	0.15
F	0.50	0.75
G	0.65	BSC
H	0.50	0.60
J	0.09	0.20
J1	0.09	0.16
K	0.19	0.30
K1	0.19	0.25
L	6.40	BSC
M	0.	8.
	0.	8.

SOLDERING FOOTPRINT*




PACKAGE DIMENSIONS

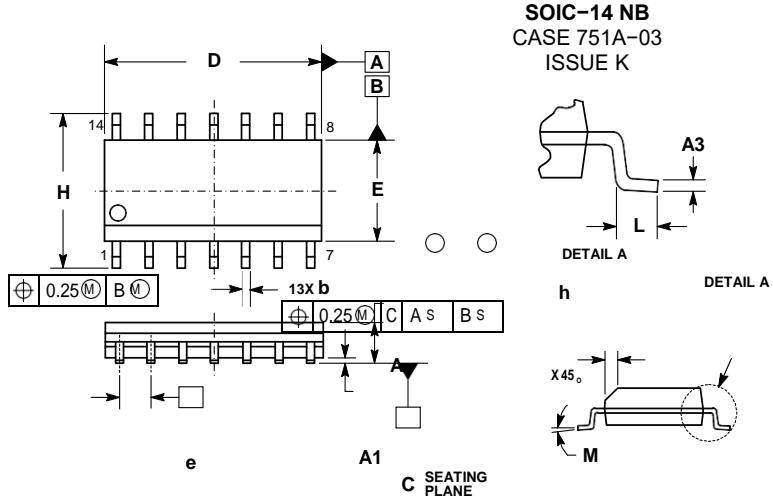

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.13 TOTAL IN EXCESS OF AT MAXIMUM MATERIAL CONDITION.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD PROTRUSIONS.
5. MAXIMUM MOLD PROTRUSION 0.15 PER SIDE.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.054	0.068
A1	0.10	0.25	0.004	0.010
A3	0.19	0.25	0.008	0.010
b	0.35	0.49	0.014	0.019
D	8.55	8.75	0.337	0.344
E	3.80	4.00	0.150	0.157
e	1.27 BSC	0.050 BSC		
H	5.80	6.20	0.228	0.244
h	0.25	0.50	0.010	0.019
L	0.40	1.25	0.016	0.049
M	0 _a	7 _a	0 _a	7 _a

