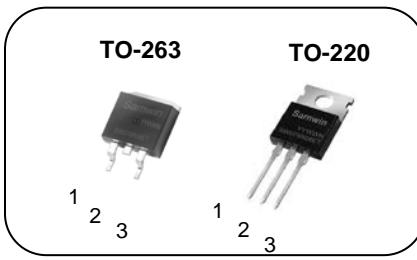



*N-channel Enhanced mode TO-263/TO-220 MOSFET***Features**

- High ruggedness
- Low $R_{DS(ON)}$ (Typ 7.8mΩ)@ $V_{GS}=10V$
- Low Gate Charge (Typ 79nC)
- Improved dv/dt Capability
- 100% Avalanche Tested
- Application: Telecom, Computer, Inverter

**1. Gate 2. Drain 3. Source**

BV_{DSS} :80V
 I_D :60A
 $R_{DS(ON)}$: 7.8mΩ

**General Description**

This power MOSFET is produced with advanced technology of SAMWIN.

This technology enable the power MOSFET to have better characteristics, including Fast switching time, low on resistance, low gate charge and especially excellent Avalanche characteristics.

**Order Codes**

Item	Sales Type	Marking	Package	Packaging
1	SW B 078R08ET	SW078R08ET	TO-263	TUBE
2	SW P 078R08ET	SW078R08ET	TO-220	TUBE

Absolute maximum ratings

Symbol	Parameter	Value		Unit
		TO-263	TO-220	
V_{DSS}	Drain to source voltage	80		V
I_D	Continuous drain current (@ $T_C=25^\circ C$)	60*		A
	Continuous drain current (@ $T_C=100^\circ C$)	50*		A
I_{DM}	Drain current pulsed (note 1)	240		A
V_{GS}	Gate to source voltage	± 20		V
E_{AS}	Single pulsed avalanche energy (note 2)	304		mJ
E_{AR}	Repetitive avalanche energy (note 1)	32		mJ
dv/dt	Peak diode recovery dv/dt (note 3)	5		V/ns
P_D	Total power dissipation (@ $T_C=25^\circ C$)	134	144	W
	Derating factor above 25°C	1.1	1.2	W/°C
T_{STG}, T_J	Operating junction temperature & storage temperature	$-55 \sim +150$		°C
T_L	Maximum lead temperature for soldering purpose, 1/8 from case for 5 seconds.	300		°C

*. Drain current is limited by junction temperature.

Thermal characteristics

Symbol	Parameter	Value		Unit
		TO-263	TO-220	
R_{thjc}	Thermal resistance, Junction to case	0.93	0.87	°C/W
R_{thja}	Thermal resistance, Junction to ambient		53	°C/W

Electrical characteristic ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Off characteristics						
BV_{DSS}	Drain to source breakdown voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	80			V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_{\text{D}}=250\mu\text{A}$, referenced to 25°C		0.07		$^\circ\text{C}$
I_{DSS}	Drain to source leakage current	$V_{\text{DS}}=80\text{V}, V_{\text{GS}}=0\text{V}$		1		μA
		$V_{\text{DS}}=64\text{V}, T_J=125^\circ\text{C}$		50		μA
I_{GSS}	Gate to source leakage current, forward	$V_{\text{GS}}=20\text{V}, V_{\text{DS}}=0\text{V}$		100		nA
	Gate to source leakage current, reverse	$V_{\text{GS}}=-20\text{V}, V_{\text{DS}}=0\text{V}$		-100		nA
On characteristics						
$V_{\text{GS(TH)}}$	Gate threshold voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2		4	V
$R_{\text{DS(ON)}}$	Drain to source on state resistance	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=30\text{A}, T_J=25^\circ\text{C}$		7.8	9.7	$\text{m}\Omega$
		$V_{\text{GS}}=10\text{V}, I_{\text{D}}=60\text{A}, T_J=25^\circ\text{C}$		7.9	9.9	$\text{m}\Omega$
		$V_{\text{GS}}=10\text{V}, I_{\text{D}}=30\text{A}, T_J=125^\circ\text{C}$		14		$\text{m}\Omega$
G_{fs}	Forward transconductance	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=30\text{A}$		90		S
Dynamic characteristics						
C_{iss}	Input capacitance	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=40\text{V}, f=1\text{MHz}$		4060		pF
C_{oss}	Output capacitance			314		
C_{rss}	Reverse transfer capacitance			237		
$t_{\text{d(on)}}$	Turn on delay time	$V_{\text{DS}}=40\text{V}, I_{\text{D}}=30\text{A}, R_G=4.7\Omega, V_{\text{GS}}=10\text{V}$ (note 4,5)		21		ns
t_r	Rising time			51		
$t_{\text{d(off)}}$	Turn off delay time			49		
t_f	Fall time			26		
Q_g	Total gate charge	$V_{\text{DS}}=64\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=30\text{A}$ (note 4,5)		79		nC
Q_{gs}	Gate-source charge			19		
Q_{gd}	Gate-drain charge			29		
R_g	Gate resistance	$V_{\text{DS}}=0\text{V}$, Scan F mode		1.3		Ω

Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_s	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			60	A
I_{SM}	Pulsed source current				240	A
V_{SD}	Diode forward voltage drop.	$I_s=60\text{A}, V_{\text{GS}}=0\text{V}$			1.4	V
t_{rr}	Reverse recovery time	$I_s=30\text{A}, V_{\text{GS}}=0\text{V}, dI_F/dt=100\text{A}/\mu\text{s}$		33		ns
Q_{rr}	Reverse recovery charge			36		nC

※. Notes

1. Repetitive rating : pulse width limited by junction temperature.
2. $L = 0.68\text{mH}$, $I_{\text{AS}} = 30\text{A}$, $V_{\text{DD}} = 50\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$
3. $I_{\text{SD}} \leq 30\text{A}$, $dI/dt = 100\text{A}/\mu\text{s}$, $V_{\text{DD}} \leq \text{BV}_{\text{DSS}}$, Starting $T_J = 25^\circ\text{C}$
4. Pulse Test : Pulse Width $\leq 300\text{\mu s}$, duty cycle $\leq 2\%$
5. Essentially independent of operating temperature.

Fig. 1. On-state characteristics

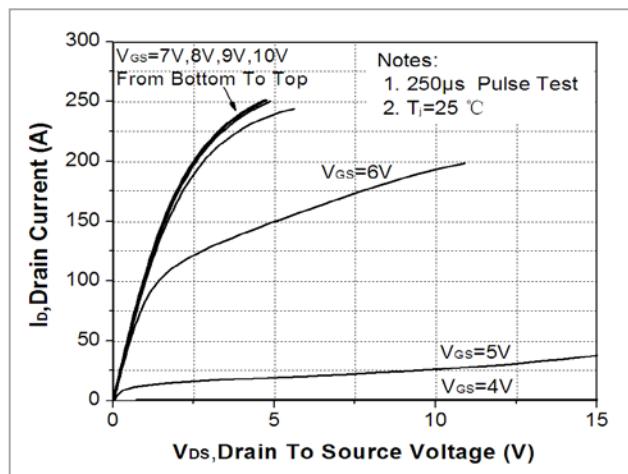


Fig. 2. On-resistance variation vs. drain current and gate voltage

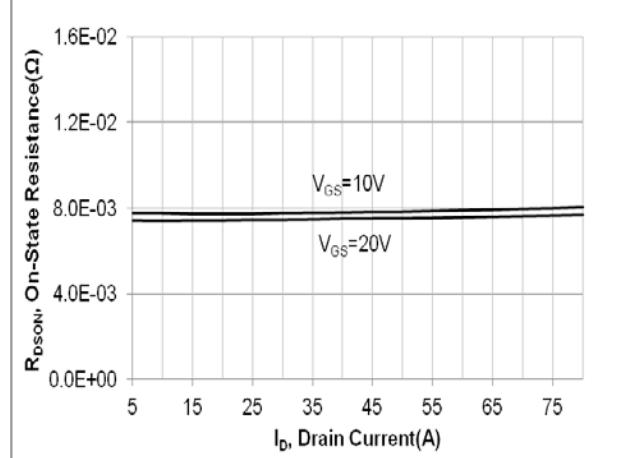


Fig. 3. Gate charge characteristics

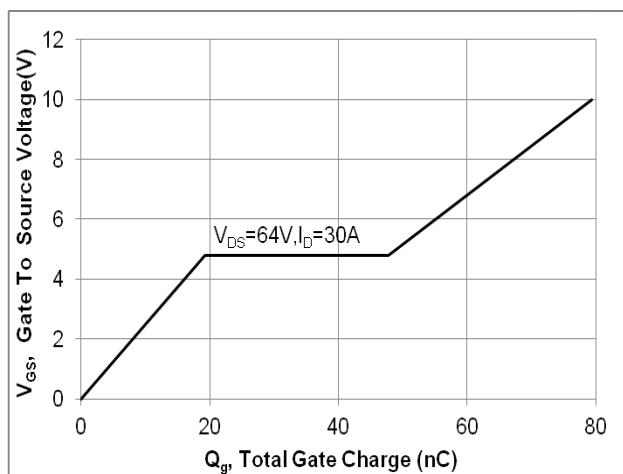


Fig. 4. On-state current vs. diode forward voltage

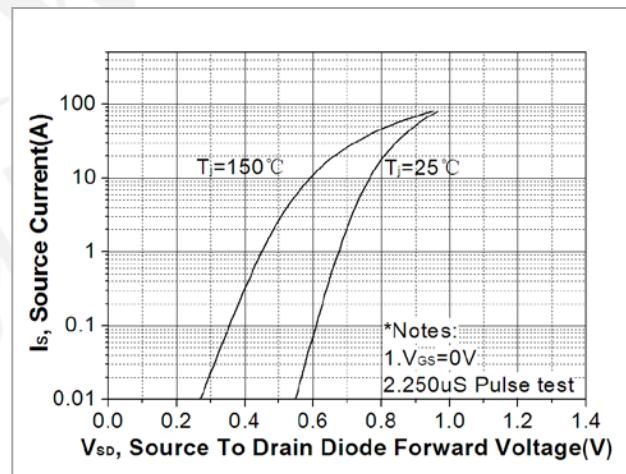


Fig 5. Breakdown voltage variation vs. junction temperature

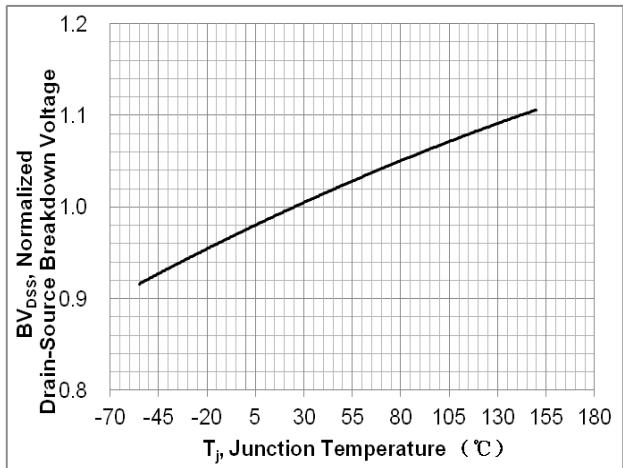


Fig. 6. On-resistance variation vs. junction temperature

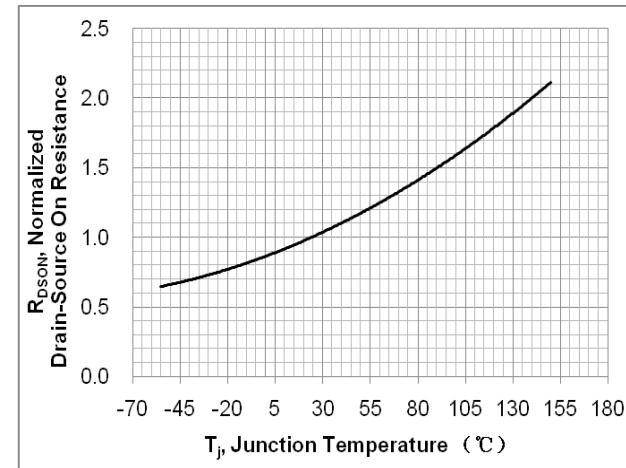


Fig. 7. Maximum safe operating area(TO-263)

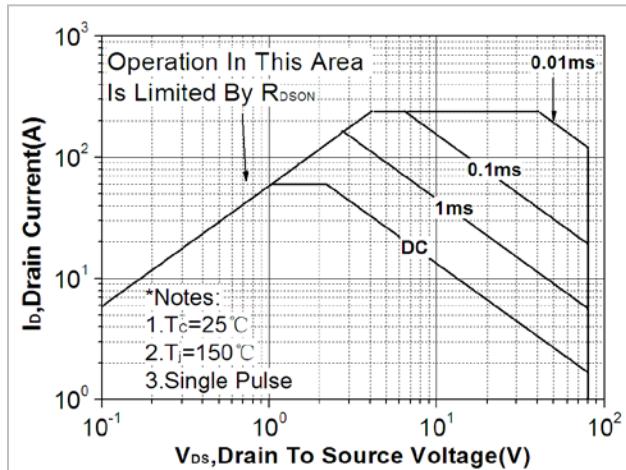


Fig. 8. Maximum safe operating area(TO-220)

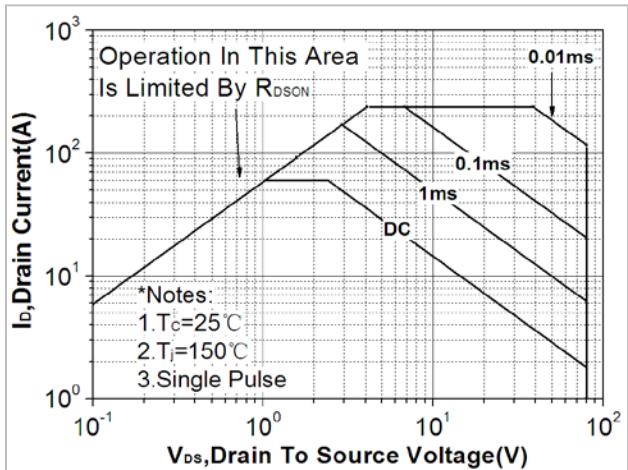


Fig. 9. Capacitance Characteristics

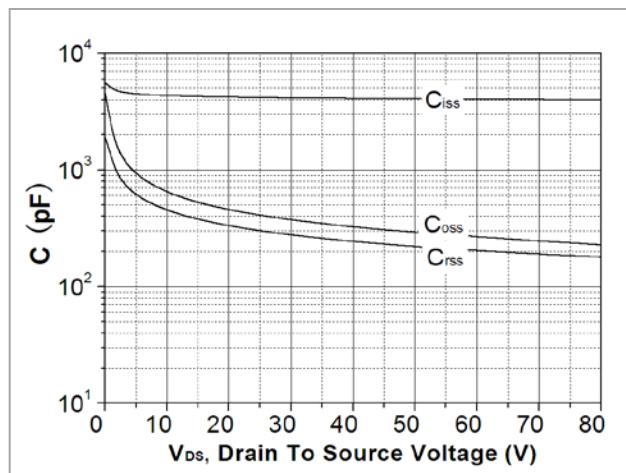


Fig. 10. Transient thermal response curve(TO-263)

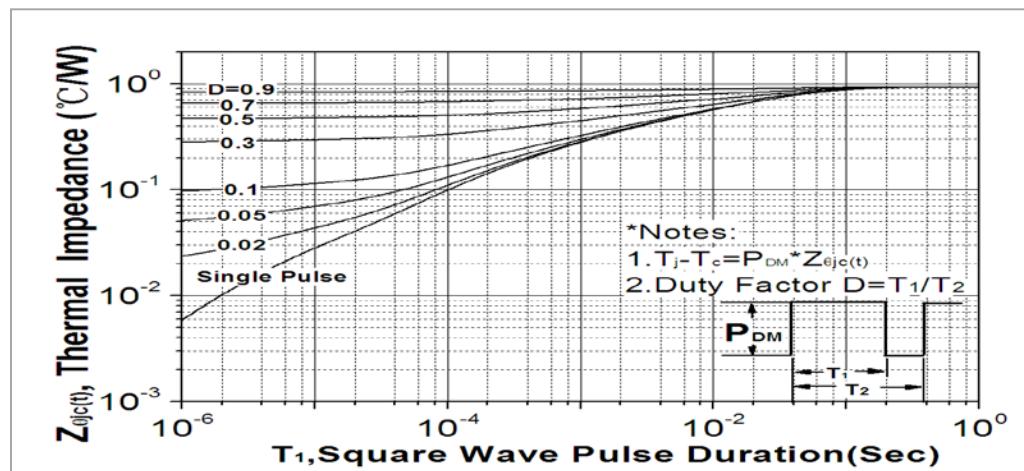


Fig. 11. Transient thermal response curve(TO-220)

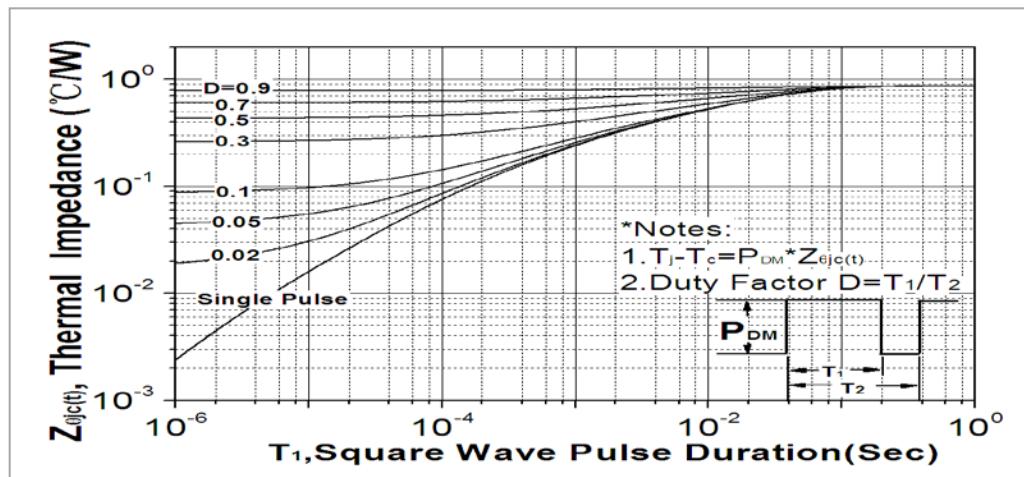


Fig. 12. Gate charge test circuit & waveform

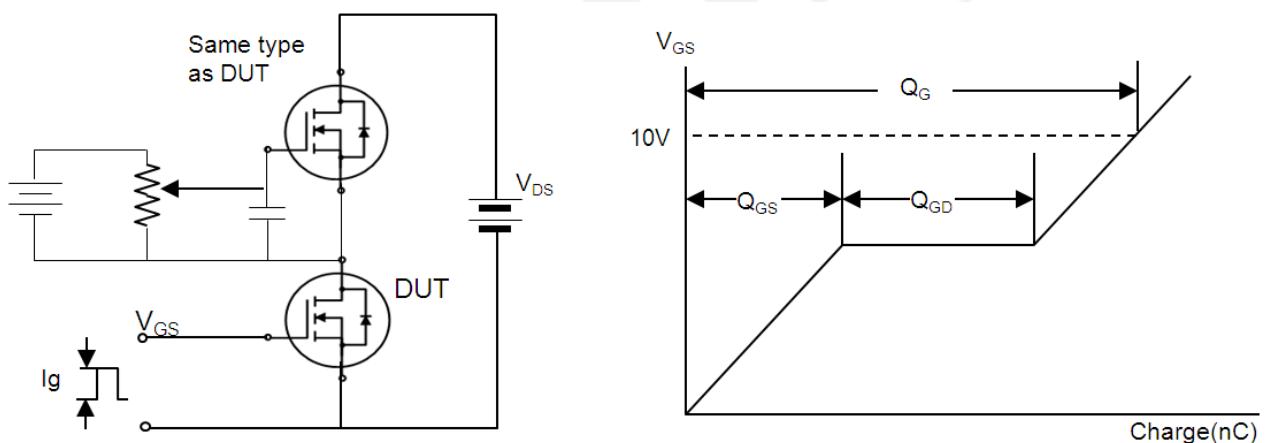


Fig. 13. Switching time test circuit & waveform

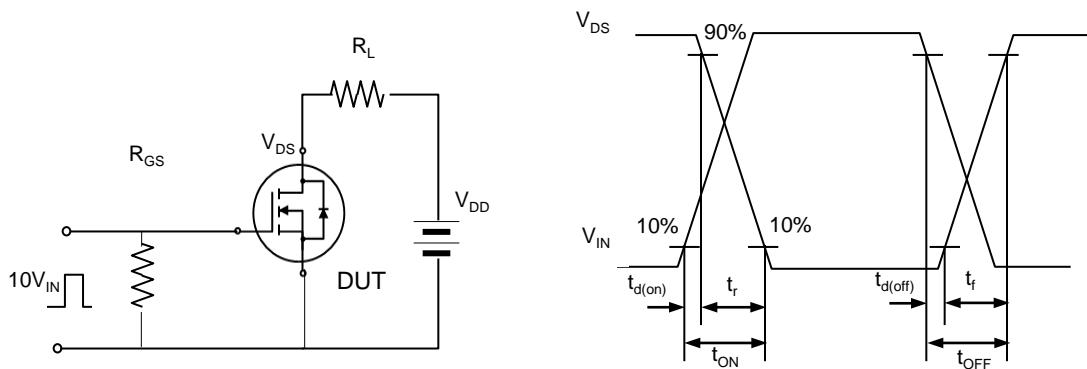


Fig. 14. Unclamped Inductive switching test circuit & waveform


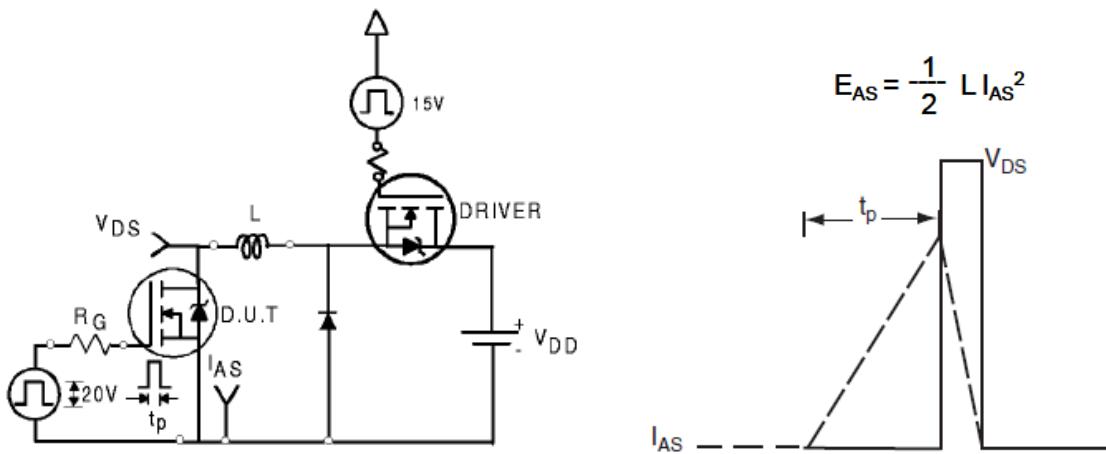


Fig. 15. Peak diode recovery dv/dt test circuit & waveform

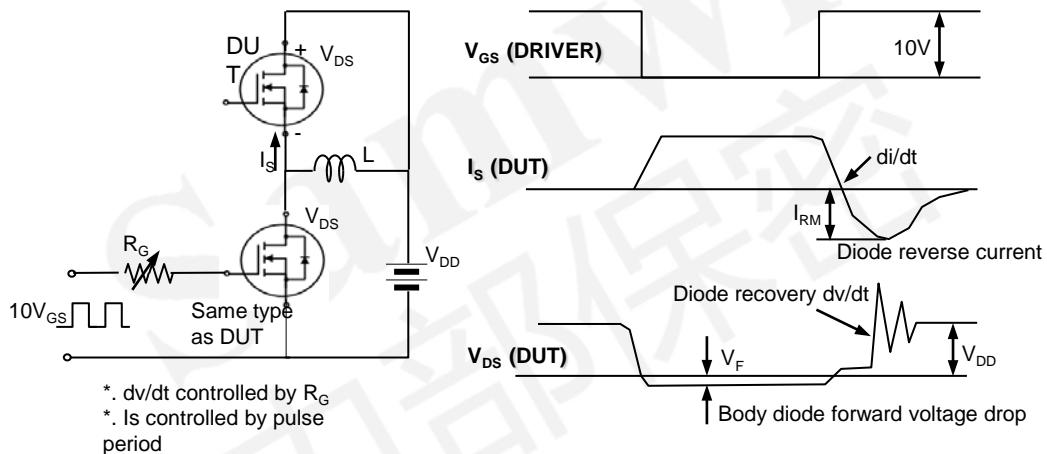

DISCLAIMER

- * All the data & curve in this document was tested in XI'AN SEMIPOWER TESTING & APPLICATION CENTER.
- * This product has passed the PCT, TC, HTRB, HTGB, HAST, PC and Solderdunk reliability testing.
- * Qualification standards can also be found on the Web site (<http://www.semipower.com.cn>)
- * Suggestions for improvement are appreciated, Please send your suggestions to samwin@samwinsemi.com