



N-channel Enhanced mode TO-220/TO-220FT/TO-263 MOSFET

Features

- High ruggedness
- Low $R_{DS(ON)}$ (Typ 0.15Ω)@ $V_{GS}=10V$
- Low Gate Charge (Typ 38nC)
- Improved dv/dt Capability
- 100% Avalanche Tested
- Application: LED , Adaptor

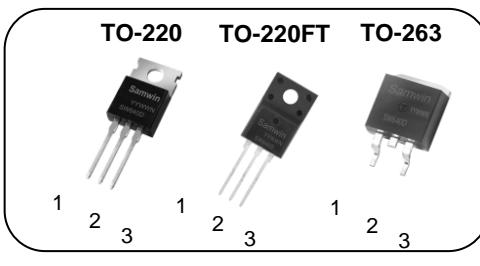

BV_{DSS} : 200V
I_D : 18A
R_{DS(ON)} : 0.15Ω



General Description

This power MOSFET is produced with advanced technology of SAMWIN.

This technology enable the power MOSFET to have better characteristics, including fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics.

Order Codes

Item	Sales Type	Marking	Package	Packaging
1	SW P 640D	SW640D	TO-220	TUBE
2	SW Y 640D	SW640D	TO-220FT	TUBE
3	SW B 640D	SW640D	TO-263	TUBE

Absolute maximum ratings

Symbol	Parameter	Value			Unit
		TO-220	TO-220FT	TO-263	
V_{DSS}	Drain to source voltage	200			V
I_D	Continuous drain current (@ $T_C=25^\circ C$)	18*			A
	Continuous drain current (@ $T_C=100^\circ C$)	11*			A
I_{DM}	Drain current pulsed (note 1)	72			A
V_{GS}	Gate to source voltage	±20			V
E_{AS}	Single pulsed avalanche energy (note 2)	243			mJ
E_{AR}	Repetitive avalanche energy (note 1)	33			mJ
dv/dt	Peak diode recovery dv/dt (note 3)	5			V/ns
P_D	Total power dissipation (@ $T_C=25^\circ C$)	119	29.5	110.6	W
	Derating factor above 25°C	0.95	0.23	0.88	W/°C
T_{STG}, T_J	Operating junction temperature & storage temperature	-55 ~ + 150			°C
T_L	Maximum lead temperature for soldering purpose, 1/8 from case for 5 seconds.	300			°C

*. Drain current is limited by junction temperature.

Thermal characteristics

Symbol	Parameter	Value			Unit
		TO-220	TO-220FT	TO-263	
R_{thjc}	Thermal resistance, Junction to case	1.05	4.24	1.13	°C/W
R_{thja}	Thermal resistance, Junction to ambient	54	49		°C/W

Electrical characteristic ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Off characteristics						
BV_{DSS}	Drain to source breakdown voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	200			V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_D=250\mu\text{A}$, referenced to 25°C		0.23		$\text{V}/^\circ\text{C}$
I_{DSS}	Drain to source leakage current	$V_{\text{DS}}=200\text{V}$, $V_{\text{GS}}=0\text{V}$			1	μA
		$V_{\text{DS}}=160\text{V}$, $T_C=125^\circ\text{C}$			50	μA
I_{GSS}	Gate to source leakage current, forward	$V_{\text{GS}}=20\text{V}$, $V_{\text{DS}}=0\text{V}$			100	nA
	Gate to source leakage current, reverse	$V_{\text{GS}}=-20\text{V}$, $V_{\text{DS}}=0\text{V}$			-100	nA
On characteristics						
$V_{\text{GS(TH)}}$	Gate threshold voltage	$V_{\text{DS}}=V_{\text{GS}}$, $I_D=250\mu\text{A}$	2		4	V
$R_{\text{DS(ON)}}$	Drain to source on state resistance	$V_{\text{GS}}=10\text{V}$, $I_D=9\text{A}$		0.15	0.18	Ω
G_{fs}	Forward transconductance	$V_{\text{DS}}=30\text{V}$, $I_D=9\text{A}$		12		S
Dynamic characteristics						
C_{iss}	Input capacitance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=25\text{V}$, $f=1\text{MHz}$		1300		pF
C_{oss}	Output capacitance			200		
C_{rss}	Reverse transfer capacitance			61		
$t_{\text{d(on)}}$	Turn on delay time	$V_{\text{DS}}=100\text{V}$, $I_D=18\text{A}$, $R_G=25\Omega$, $V_{\text{GS}}=10\text{V}$ (note 4,5)		15		ns
t_r	Rising time			57		
$t_{\text{d(off)}}$	Turn off delay time			97		
t_f	Fall time			57		
Q_g	Total gate charge	$V_{\text{DS}}=160\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_D=18\text{A}$ (note 4,5)		38		nC
Q_{gs}	Gate-source charge			7		
Q_{gd}	Gate-drain charge			14		
R_g	Gate resistance	$V_{\text{DS}}=0\text{V}$, Scan F mode		1.7		Ω

Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_S	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			18	A
I_{SM}	Pulsed source current				72	A
V_{SD}	Diode forward voltage drop.	$I_S=18\text{A}$, $V_{\text{GS}}=0\text{V}$			1.4	V
t_{rr}	Reverse recovery time	$I_S=18\text{A}$, $V_{\text{GS}}=0\text{V}$, $dI_F/dt=100\text{A/us}$		151		ns
Q_{rr}	Reverse recovery charge			0.9		μC

※ Notes

- Repetitive rating : pulse width limited by junction temperature.
- $L=1.5\text{mH}$, $I_{\text{AS}}=18\text{A}$, $V_{\text{DD}}=50\text{V}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$
- $I_{\text{SP}} \leq 18\text{A}$, $dI/dt = 100\text{A/us}$, $V_{\text{DD}} \leq \text{BV}_{\text{DSS}}$, Starting $T_J=25^\circ\text{C}$
- Pulse Test : Pulse Width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
- Essentially independent of operating temperature.

Fig. 1. On-state characteristics

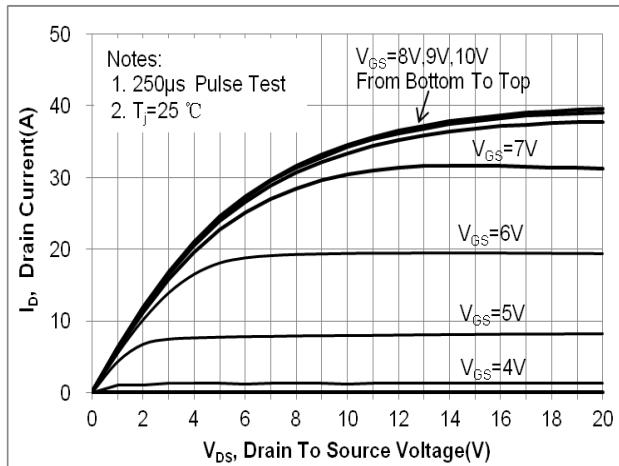


Fig. 2. Transfer characteristics

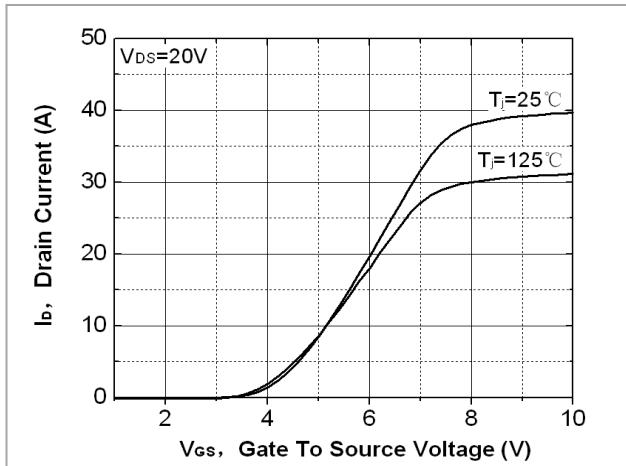


Fig. 3. On-resistance variation vs. drain current and gate voltage

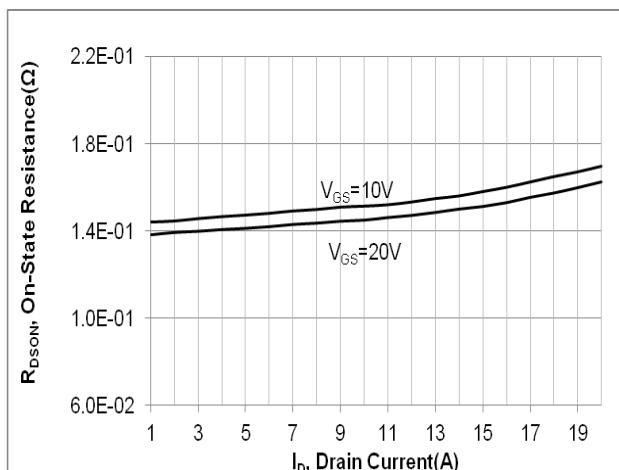


Fig. 4. On-state current vs. diode forward voltage

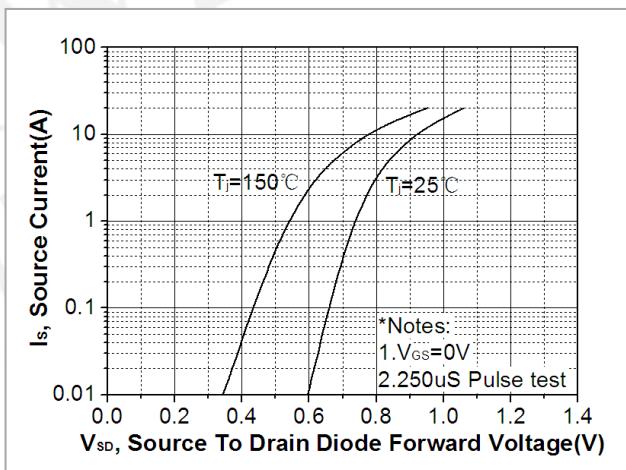


Fig 5. Breakdown voltage variation vs. junction temperature

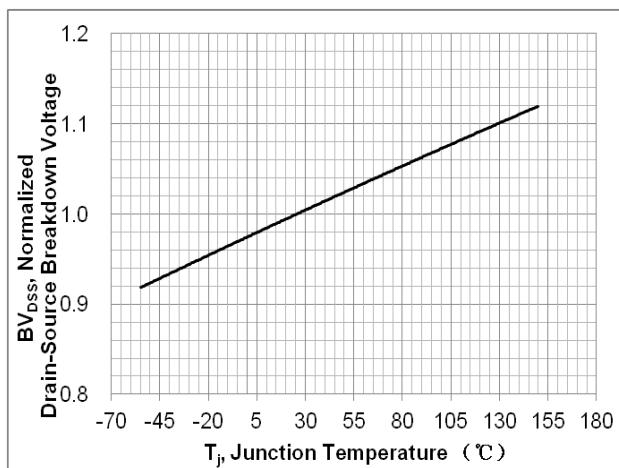


Fig. 6. On-resistance variation vs. junction temperature

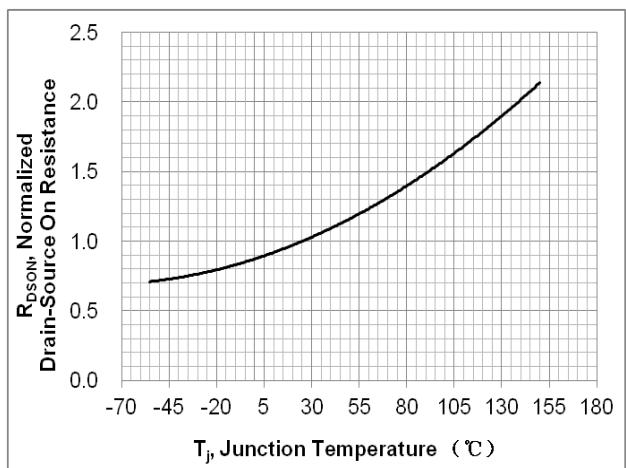


Fig. 7. Gate charge characteristics

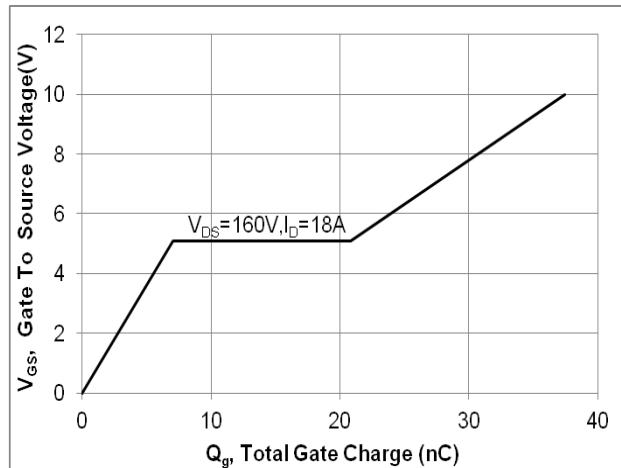


Fig. 8. Capacitance Characteristics

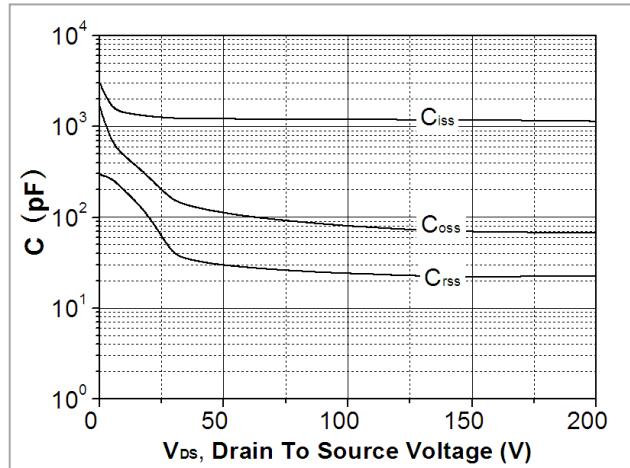


Fig. 9. Maximum safe operating area(TO-220)

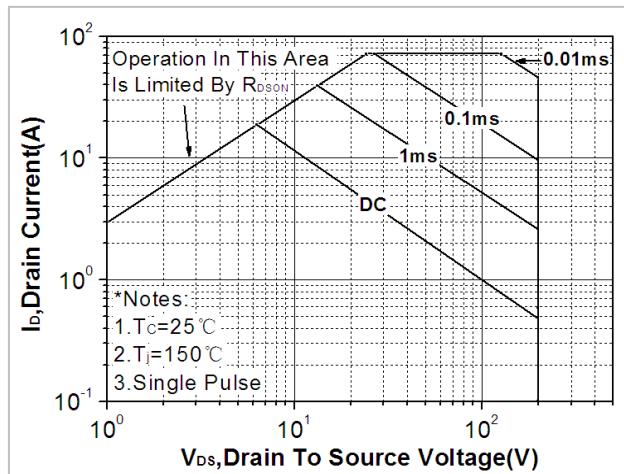


Fig. 10. Maximum safe operating area(TO-220FT)

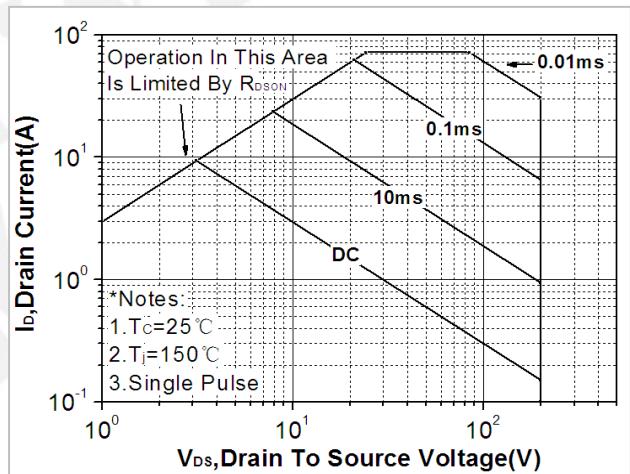


Fig. 11. Maximum safe operating area(TO-263)

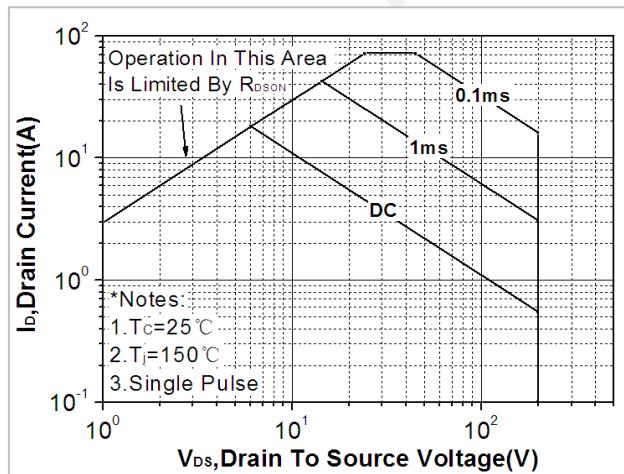


Fig. 12. Transient thermal response curve(TO-220)

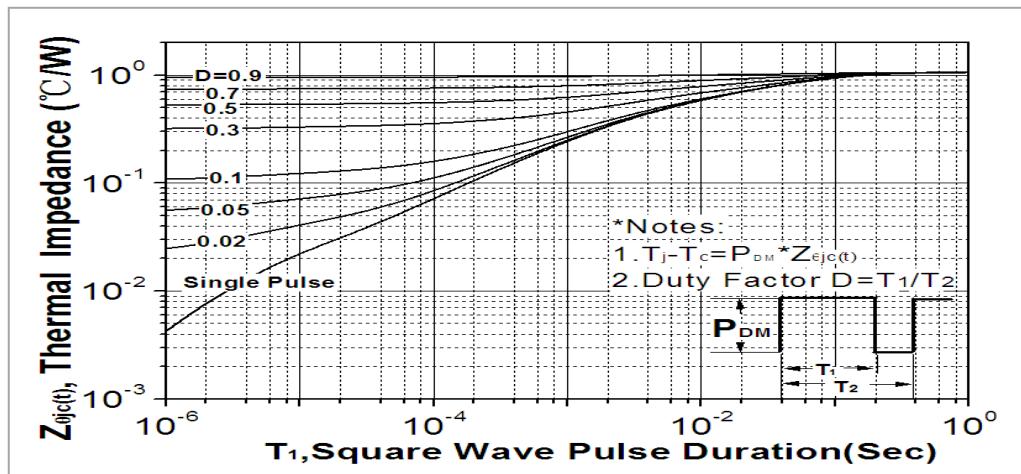


Fig. 13. Transient thermal response curve(TO-220FT)

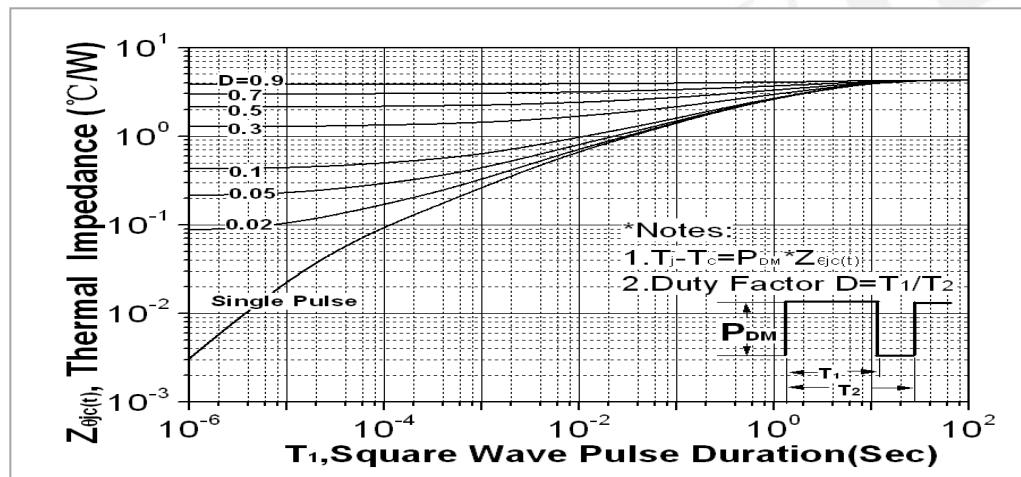


Fig. 14. Transient thermal response curve(TO-263)

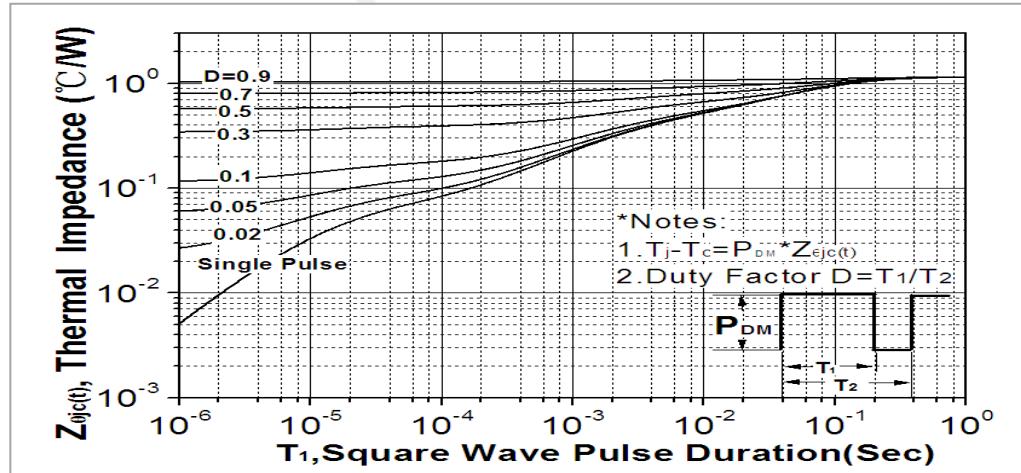


Fig. 15. Gate charge test circuit & waveform

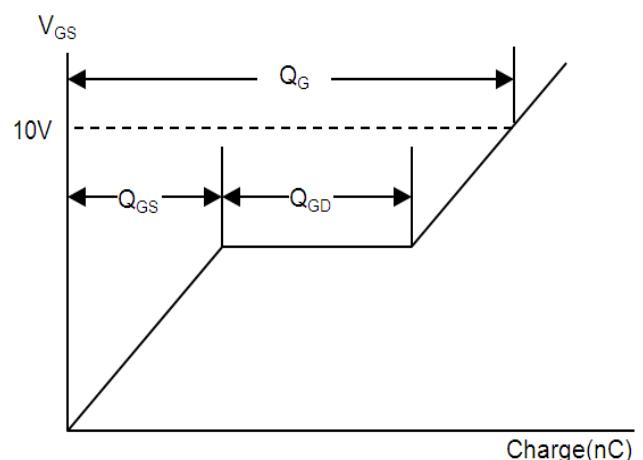
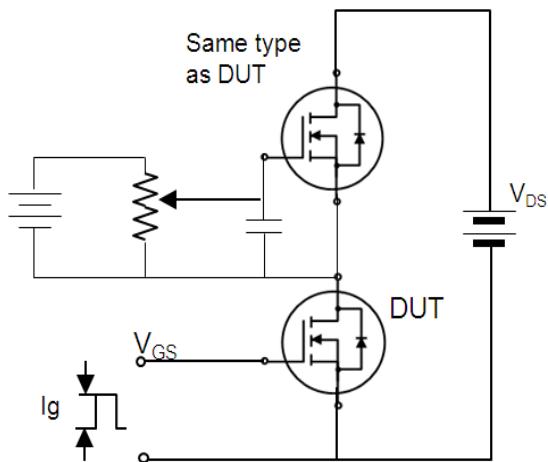


Fig. 16. Switching time test circuit & waveform



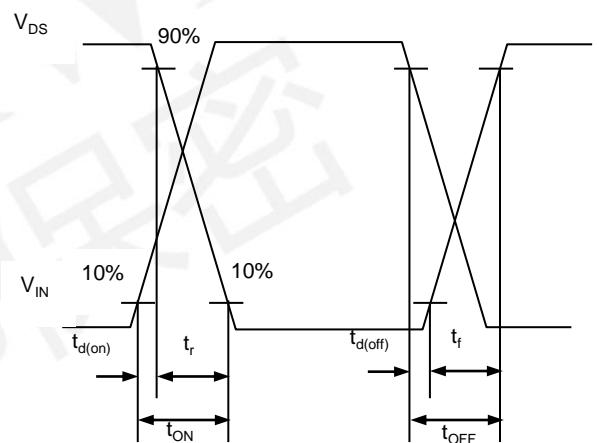


Fig. 17. Unclamped Inductive switching test circuit & waveform

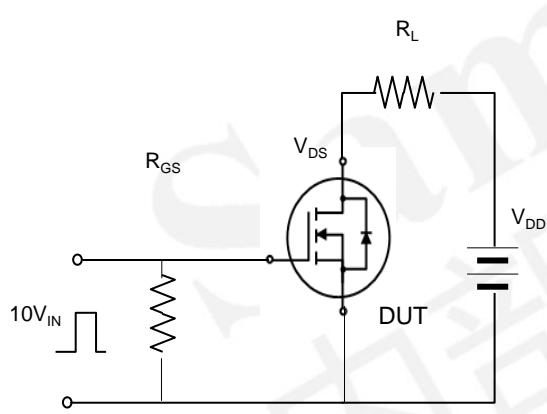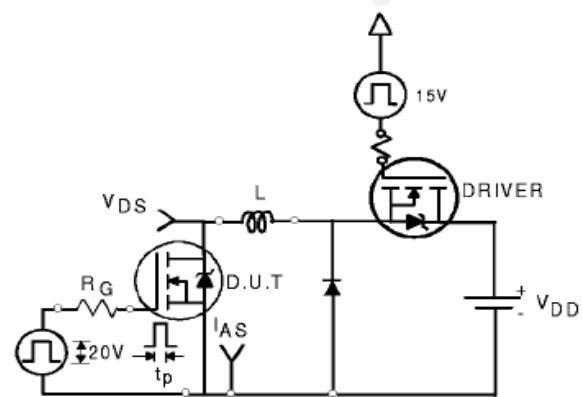

$$E_{AS} = \frac{1}{2} L I_{AS}^2$$


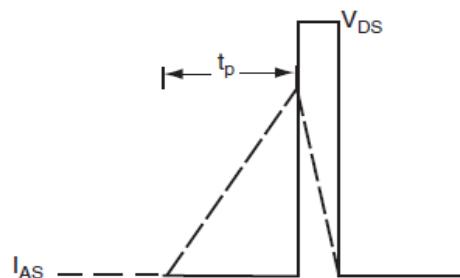


Fig. 18. Peak diode recovery dv/dt test circuit & waveform

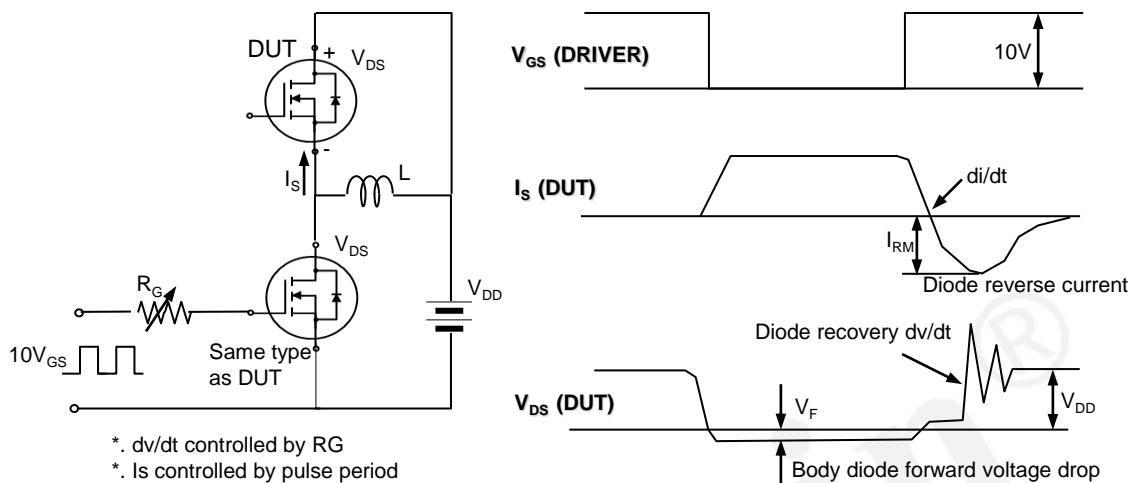

DISCLAIMER

- * All the data & curve in this document was tested in SEMIPOWER TESTING & APPLICATION CENTER.
- * This product has passed the PCT, TC, HTRB, HTGB, HAST, PC and Solderdunk reliability testing.
- * Qualification standards can also be found on the Web site (<http://www.semipower.com.cn>)
- * Suggestions for improvement are appreciated, Please send your suggestions to samwin@samwinsemi.com