




Datasheet

100 V, 6 A power Schottky rectifier



Product status link	
STPS6M100DEE	

Product summary			
Symbol	Value		
I _{F(AV)}	6 A		
V _{RRM}	100 V		
T _j (max.)	150 °C		
V _F (typ.)	0.58 V		

Features

- Negligible switching losses
- Extremely fast switching
- Low thermal resistance
- Avalanche capacity specified
- High junction temperature capability
- ECOPACK2 compliant

Application

- Cordless appliance
- SSD
- Battery charger
- Telecom power
- DC / DC converter
- Polarity protection
- Freewheeling

Description

This Schottky rectifier is designed for switch mode power supply and high frequency DC to DC converters.

Packaged in PowerFLAT, this device is intended for use in low voltage, high frequency, inverters, free-wheeling, by-pass diode and polarity protection applications. Its low profile was especially designed to be used in applications with space-saving constraints.

1 Characteristics

Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)

Symbol	Parameter			Value	Unit
V _{RRM}	Repetitive peak reverse voltage	Repetitive peak reverse voltage			V
I _{F(RMS)}	Forward rms current			15	Α
I _{F(AV)}	Average forward current, δ = 0.5 square wave T _c = 130 °C			6	Α
I _{FSM}	Surge non repetitive forward current		t _p = 10 ms sinusoidal	100	Α
P _{ARM}	Repetitive peak avalanche power $t_p = 10 \ \mu s$ $T_c = 125 \ ^{\circ}C$		480	W	
T _{stg}	Storage temperature range			-65 to +150	°C
Тj	Maximum operating junction temperature			+150	°C

Table 2. Thermal resistance parameters

Symbol	Parameter	Max. value	Unit
R _{th(j-c)}	Junction to case	4	°C/W

For more information, please refer to the following application note:

AN5088: Rectifiers thermal management, handling and mounting recommendations

Symbol	Parameter	Test conditions		Min.	Тур.	Max.	Unit
I _R ⁽¹⁾	Deverse leekage eurrent	T _j = 25 °C	V _R = V _{RRM}	-		30	μA
IR ⁽¹⁾ Reven	everse leakage current	T _j = 125 °C		-	5	15	mA
V _E ⁽²⁾	Forward voltage drop	T _j = 25 °C	I _F = 6 A	-		0.78	
VF Y		T _j = 125 °C	IF - 0 X	-	0.58	0.64	V

1. Pulse test: $t_p = 5 ms$, $\delta < 2\%$

2. Pulse test: $t_p = 380 \ \mu s, \ \delta < 2\%$

To evaluate the conduction losses, use the following equation:


 $P = 0.56 \times I_{F(AV)} + 0.0133 \times I_{F}^{2}(RMS)$

For more information, please refer to the following application notes related to the power losses:

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses in a power diode



1.1 Characteristics (curves)

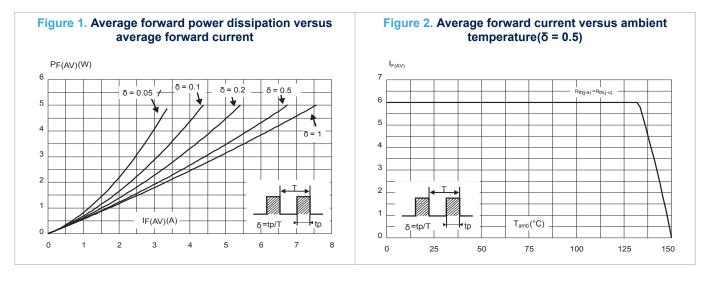

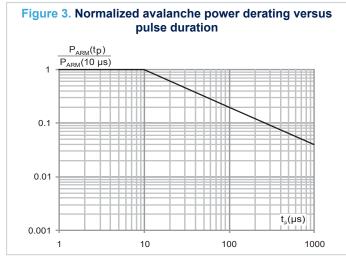
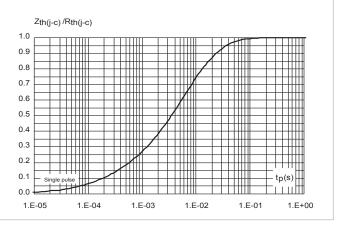


Figure 4. Relative variation of thermal impedance junction to case versus pulse duration



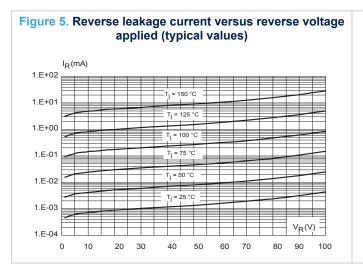
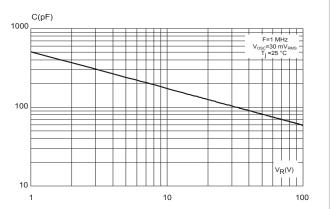


Figure 6. Junction capacitance versus reverse voltage applied (typical values)






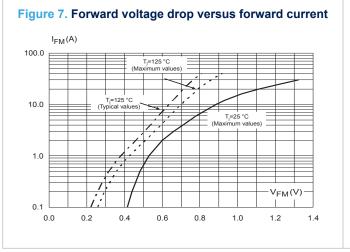


Figure 8. Thermal resistance junction to ambient versus copper surface under tab

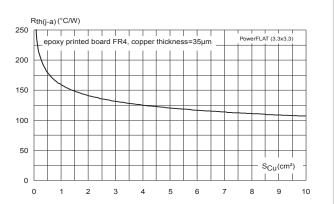

57

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 PowerFLAT 3.3x3.3 mm package information

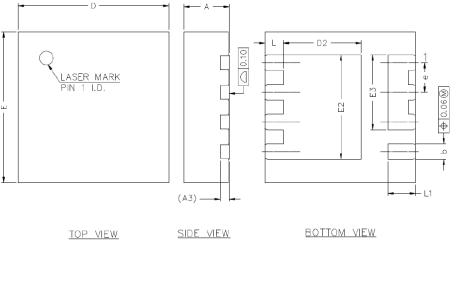


Figure 9. PowerFLAT 3.3x3.3 mm package outline



<u>SIDE VIEW</u>

Table 4. PowerFLAT 3.3x3.3 mm mechanical data

	Dimensions						
Ref.	Millimeters						
	Min.	Тур.	Max.				
А	0.90		1.10				
A3		0.20					
b	0.29		0.44				
D	3.20		3.40				
D2	1.61		1.82				
E	3.20		3.40				
E2	2.19		2.39				
E3	1.54		1.74				
e	0.55		0.75				
L	0.30		0.50				
L1	0.50		0.70				

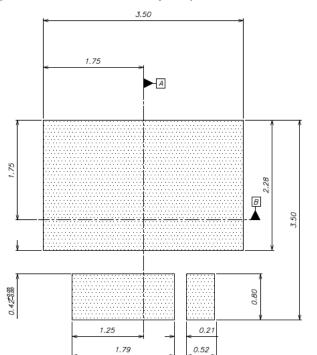


Figure 10. Recommended footprint (dimensions are in mm)



3 Ordering information

Table 5. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STPS6H100DEE-TR	S6M100	PowerFLAT 3.3 x 3.3	34 mg	3000	Tape and 13" reel

Revision history

Table 6. Document revision history

Date	Version	Changes
09-Sep-2012	1	First issue.
16-May-2022	2	Updated package outline PowerFLAT 3.3 x 3.3.

IMPORTANT NOTICE - READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2022 STMicroelectronics – All rights reserved