





Surge protection Device

浪涌保护器

SX Series



Surge Protective Device for LED Lighting

Description

SX-01 Surge Protective Device is specially designed to be used in outdoor LED lighting system fixtures for transient overvoltage protection. It is mainly constructed by thermally protected varistors and gas discharge tube devices, It can be installed in LED lamp or lamp post.

Features

- Suitabile for use in luminaire with Class I or Class II installations
- * Protection mode : L-N, L-PE, N-PE
- Built-in thermal detachment function, higher security
- Series isolation design, excellent protection performance
- Excellent impact resistance, low voltage limit
- Built-in LED indication, saves maintenance time by identifying replacement need
- Double insulation cable wire
- IP62-Dust-tight and water resistant

Applications

- digital signage
- flood lighting
- street lighting
- roadway lighting

parking garage lighting

- traffic lighting
- tunnel lighting
- wall wash lighting
- ◆ AC-LED Lighting



Electrical specifications

Part Number	SX-01	
Rated supply Voltage/Un(VAC)	100~300V	
Maximum Continuous Operating Voltage/MCOV/Uc(VAC)1	320V	
Rated load current/IL(A)	8A	
Nominal Discharge Current/In(kA)2	5kA	
Maximum Discharge Curren/Imax(kA)3	10kA	
Open Circuit Voltage/Uoc (kV)	10kV	
Voltage Protective level//Up(V)4	L-N(≤1.5KV), L-G/PE(≤2.3KV), N-G/PE(≤2.3KV)	
Wire for terminal	Hose cable (2.1mm²)	
Connection mode	Series connection	
Power System	TN	
Protection Degree	IP62	
Ambient Temperature	Ambient Temperature -40 ℃ ~+80 ℃	

Notes:

- 1.MCOV/Uc(VAC):The Maximum Continuous Operating Voltage can be continuously applied to the SPD.
- 2. Nominal Discharge Current(In)(kA): The nominal discharge current is a measure of the SPDs endurance capability 15 impulses of discharge current uses the 8/20us current waveform.
- 3.Maximum Discharge Current(Imax)(kA):The maximum discharge current is a measure of the SPDs maximum capability single impulse of discharge current uses the 8/20us current waveform.All Devices pass maximum discharge current with possible,safe opening of thermal disconnect.
- 4. Voltage Protective Level/Up: The highest value of residual voltage measurements during the application of impulses of 8/20us nominal discharge(In); arounding voltage value of maximum measurement.


Wire Specification

Output Lenght	Diameter	Installation Class	Color
160mm±20mm	2.1 mm²	I	L-Brown N-Blue G/PE-Green with Yellow stripe
160mm±20mm	2.1 mm²	II	L-Brown N-Blue
160mm±20mm	14AWG	-	L-Black N-White G-Green

Notes:


- 1.Input terminal AC network, Output terminal drive AC input, Incorrect installation can greatly damage the performance of the SPD.
- 2.Wire Line lenght can be customized
- 3.Use two M4 screws to fix the SPD.

Dimensions

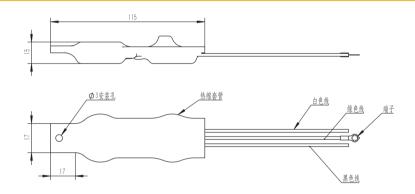


Application/Installation Schematic

Product schematic diagram



Product installation diagram

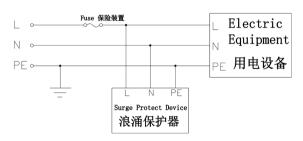

Contact us

Shenzhen Shaoxin Electronics Co.Ltd.

Address: 2 / F, building a, No. 18 Chuangye Road, Shilong community, Shiyan street, Bao'an District, Shenzhen City, Guangdong Province

Tel:+86 0755 83239646

Fax:+86 0755 83239644