SGM2018
1μA Ultra-Low Current Consumption and Low Dropout CMOS Voltage Regulator

GENERAL DESCRIPTION

The SGM2018 is an ultra-low current consumption, low dropout voltage and high accuracy linear regulator. It is capable of supplying 250mA output current with only 1μA (TYP) current consumption. The typical dropout voltage is only 70mV at 100mA. The operating input voltage range is from 1.7V to 5V and fixed output voltages are 0.8V, 2.8V, 3.0V and 3.3V.

Other features include logic-controlled shutdown mode, short-circuit current limit and thermal shutdown protection. The SGM2018 has automatic discharge function to quickly discharge V_{OUT} in the disabled status.

The SGM2018 is available in Green SOT-23-5 and UTDFN-1×1-4AL packages. It operates over an operating temperature range of -40℃ to +85℃.

FEATURES

- **Operating Input Voltage Range: 1.7V to 5V**
- **Fixed Outputs of 1.8V, 2.8V, 3.0V and 3.3V**
- **250mA Output Current**
- **High Output Voltage Accuracy: ±1.2% at +25℃**
- **Ultra-Low Quiescent Current: 1μA (TYP)**
- **Low Dropout Voltage: 70mV (TYP) at 100mA**
- **Low Reverse Leakage Current: 0.4μA (TYP) when $V_{OUT} > V_{IN}$**
- **Current Limiting and Thermal Protection**
- **With Output Automatic Discharge**
- **-40℃ to +85℃ Operating Temperature Range**
- **Available in Green SOT-23-5 and UTDFN-1×1-4AL Packages**

APPLICATIONS

Wearable Device
Smart Phone
Portable Equipment

TYPICAL APPLICATION

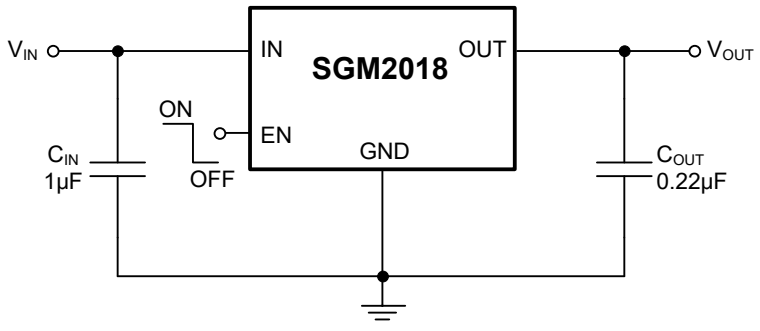

Figure 1. Typical Application Circuit

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2018-1.8	SOT-23-5	-40℃ to +85℃	SGM2018-1.8YN5G/TR	CM1XX	Tape and Reel, 3000
	UTDFN-1×1-4AL	-40℃ to +85℃	SGM2018-1.8YUDH4G/TR	N3X	Tape and Reel, 10000
SGM2018-2.8	SOT-23-5	-40℃ to +85℃	SGM2018-2.8YN5G/TR	CM2XX	Tape and Reel, 3000
	UTDFN-1×1-4AL	-40℃ to +85℃	SGM2018-2.8YUDH4G/TR	N4X	Tape and Reel, 10000
SGM2018-3.0	SOT-23-5	-40℃ to +85℃	SGM2018-3.0YN5G/TR	CM3XX	Tape and Reel, 3000
	UTDFN-1×1-4AL	-40℃ to +85℃	SGM2018-3.0YUDH4G/TR	N5X	Tape and Reel, 10000
SGM2018-3.3	SOT-23-5	-40℃ to +85℃	SGM2018-3.3YN5G/TR	CM4XX	Tape and Reel, 3000
	UTDFN-1×1-4AL	-40℃ to +85℃	SGM2018-3.3YUDH4G/TR	N6X	Tape and Reel, 10000

MARKING INFORMATION

NOTE: X = Date Code. XX = Date Code.

SOT-23-5

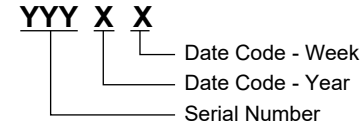

UTDFN-1×1-4AL



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

IN to GND ..... -0.3V to 6V
OUT to GND ..... -0.3V to 6V
EN to GND ..... -0.3V to 6V
Package Thermal Resistance
SOT-23-5, θ_{JA} ..... 207℃/W
UTDFN-1×1-4AL, θ_{JA} ..... 238℃/W
Junction Temperature ..... +150℃
Storage Temperature Range ..... -65℃ to +150℃
Lead Temperature (Soldering, 10s) ..... +260℃
ESD Susceptibility
HBM 7000V
CDM 1000V

RECOMMENDED OPERATING CONDITIONS

Input Voltage Range ..... 1.7V to 5V
Input Effective Capacitance, C_{IN} ..... 0.5μF (MIN)
Output Effective Capacitance, C_{OUT} ..... 0.1μF to 10μF
Operating Junction Temperature Range ..... -40℃ to +85℃

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

(TOP VIEW)

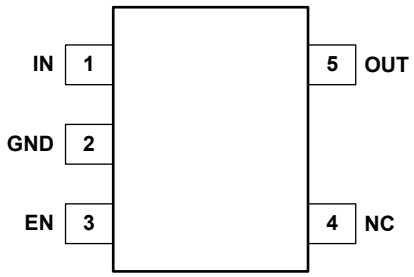

SOT-23-5

(TOP VIEW)



UTDFN-1×1-4AL

PIN DESCRIPTION

PIN		NAME	FUNCTION
SOT-23-5	UTDFN-1×1-4AL		
1	4	IN	Input Supply Voltage Pin. It is recommended to use a 1μF or larger ceramic capacitor from IN pin to ground. This ceramic capacitor should be placed as close as possible to IN pin.
2	2	GND	Ground Pin.
3	3	EN	Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator. The EN pin has an internal pull-down current source which ensures that the device is turned off when the EN pin is floated.
4	–	NC	Not Connection.
5	1	OUT	Regulator Output Pin. It is recommended to use a ceramic capacitor with effective capacitance in the range of 0.1μF to 10μF to get good power supply decoupling. This ceramic capacitor should be placed as close as possible to OUT pin.

ELECTRICAL CHARACTERISTICS

(V_{IN} = $V_{OUT(NOM)}$ + 1V, I_{OUT} = 0.1mA, V_{EN} = 5V, C_{IN} =1uF and C_{OUT} =0.22μF, Full = -40℃ to +85℃, typical values are at T_J = +25℃, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		TEMP	MIN	TYP	MAX	UNITS
Input Voltage Range	V_{IN}			Full	1.7		5	V
Output Voltage Accuracy	V_{OUT}	V_{IN} = ($V_{OUT(NOM)}$ + 1V) to 5V		+25℃	-1.2		1.2	%
Maximum Output Current				+25℃	250			mA
Output Current Limit	I_{LIMIT}			+25℃	280	480		mA
Supply Pin Current	I_Q	No load		Full		1.0	1.5	μA
Dropout Voltage (1)	V_{DROP}	I_{OUT} = 100mA, SOT-23-5	$V_{OUT(NOM)}$ = 1.8V	+25℃		145	200	mV
			$V_{OUT(NOM)}$ = 2.8V	+25℃		95	130	
			$V_{OUT(NOM)}$ = 3.0V	+25℃		90	130	
			$V_{OUT(NOM)}$ = 3.3V	+25℃		85	110	
		I_{OUT} = 100mA, UTDFN-1×1-4AL	$V_{OUT(NOM)}$ = 1.8V	+25℃		130	175	mV
			$V_{OUT(NOM)}$ = 2.8V	+25℃		80	110	
			$V_{OUT(NOM)}$ = 3.0V	+25℃		75	110	
			$V_{OUT(NOM)}$ = 3.3V	+25℃		70	90	
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	V_{IN} = ($V_{OUT(NOM)}$ + 1V) to 5V		+25℃		0.015	0.25	%/V
Load Regulation	ΔV_{OUT}	I_{OUT} = 0.1mA to 250mA		+25℃		3	15	mV
Short Current Limit	I_{SHORT}	V_{OUT} = 0V		+25℃		100		mA
Reverse Leakage Current (2)	I_{RL}	V_{IN} = 1.7V, V_{OUT} = 5.5V		+25℃		0.4		μA
Power Supply Rejection Ratio	PSRR	I_{OUT} = 30mA, $V_{OUT(NOM)}$ = 1.8V, ΔV_{RIPPLE} = 0.2V_{P-P}	f = 217Hz	+25℃		38		dB
			f = 1kHz	+25℃		27		
Output Voltage Temperature Coefficient (3)	$\frac{\Delta V_{OUT}}{\Delta T_J \times V_{OUT}}$			Full		10		ppm/℃
Shutdown								
EN Input Threshold	V_{IH}	V_{IN} = 1.7V to 5V		Full	1.4			V
	V_{IL}			Full			0.4	
EN Input Bias Current	I_{BH}	V_{EN} = 5.5V		Full		25	500	nA
	I_{BL}	V_{EN} = 0V		Full	-500		500	
Shutdown Supply Current	I_{SHDN}	V_{IN} = 5V, V_{EN} = 0V		+25℃		0.15	0.3	μA
				Full			0.65	
Output Discharge Resistance	R_{DIS}	V_{EN} = 0V, V_{OUT} = 0.5V		+25℃		50		Ω
Thermal Shutdown Temperature	T_{SHDN}					165		℃
Thermal Shutdown Hysteresis	ΔT_{SHDN}					30		℃

NOTES:

1. The dropout voltage is defined as the difference between V_{IN} and V_{OUT} when V_{OUT} falls to 95% × $V_{OUT(NOM)}$.
2. Reverse leakage current is the current flows from the output to the input when V_{OUT} > V_{IN}.
3. Output voltage temperature coefficient is defined as the worst-case voltage change divided by the total temperature range.

TYPICAL PERFORMANCE CHARACTERISTICS

T_J = +25℃, V_{IN} = $V_{OUT(NOM)}$ + 1V, $V_{OUT(NOM)}$ = 1.8V, V_{EN} = 5V, C_{IN} = 1μF and C_{OUT} = 0.22μF, unless otherwise noted.

Load Transient Response

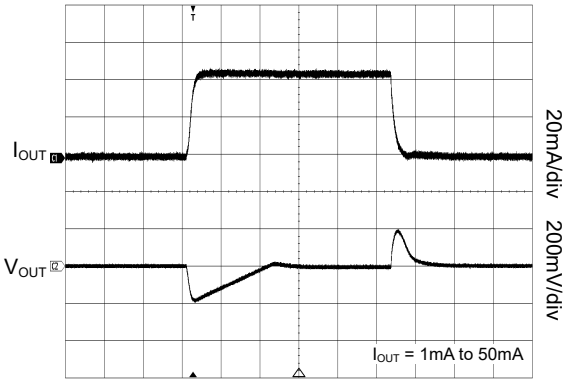

Time (100μs/div)

Load Transient Response

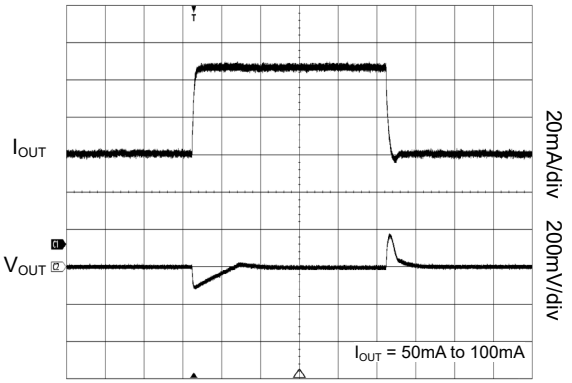

Time (100μs/div)

Line Transient Response

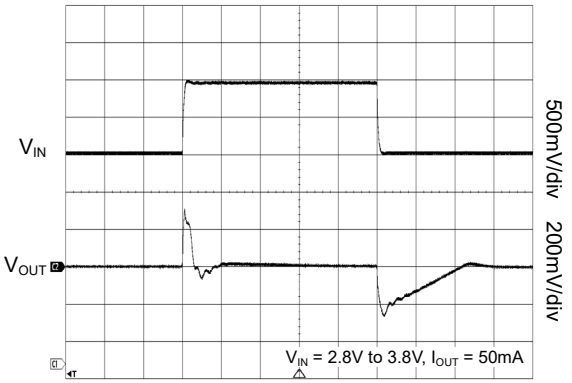

Time (100μs/div)

Power-Up Output Waveform

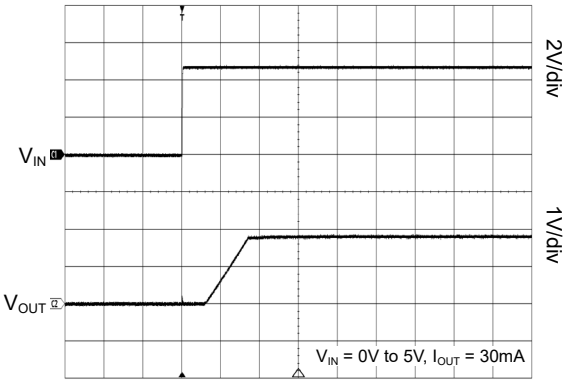

Time (2ms/div)

Turn-On with EN Pin

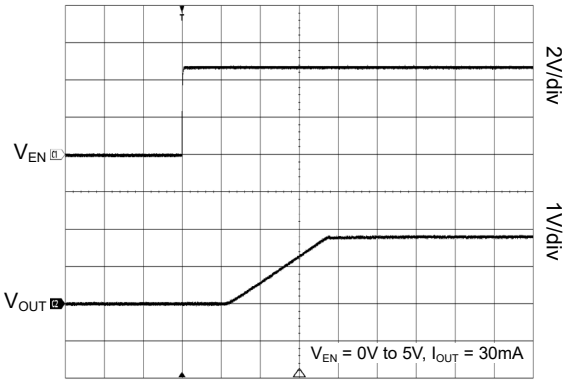

Time (1ms/div)

Turn-Off with EN Pin

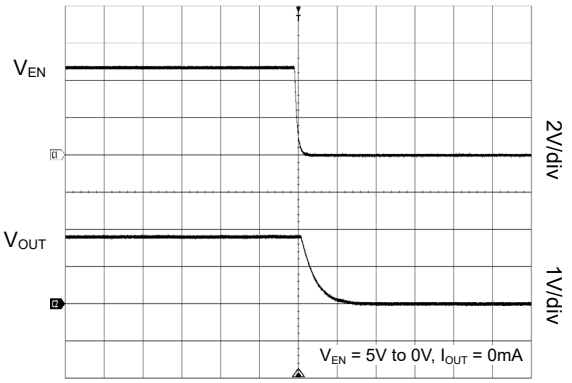

Time (20μs/div)

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

T_J = +25℃, V_{IN} = $V_{OUT(NOM)}$ + 1V, $V_{OUT(NOM)}$ = 1.8V, V_{EN} = 5V, C_{IN} = 1μF and C_{OUT} = 0.22μF, unless otherwise noted.

Power Supply Rejection Ratio vs. Frequency

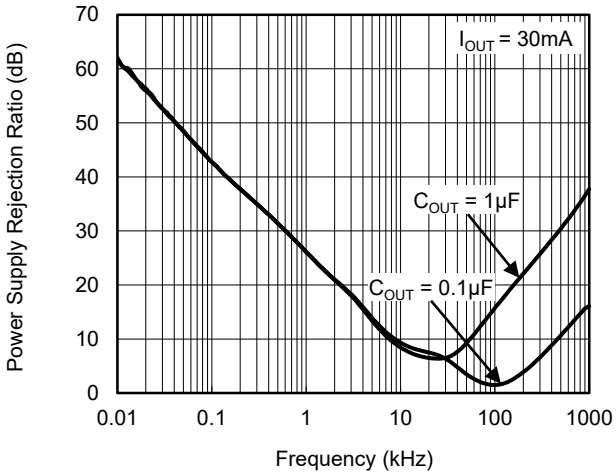

Ground Pin Current vs. Output Current

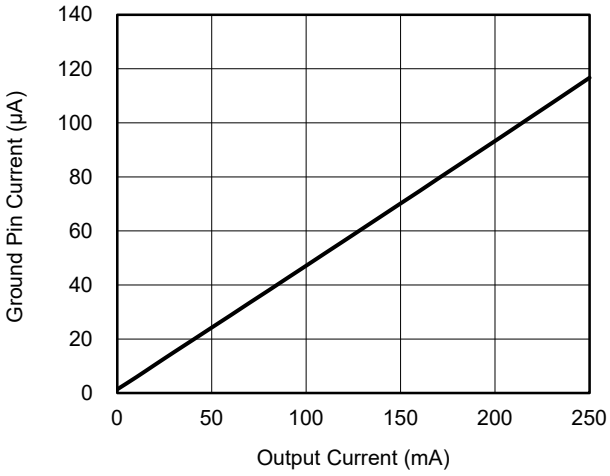

Dropout Voltage vs. Output Current

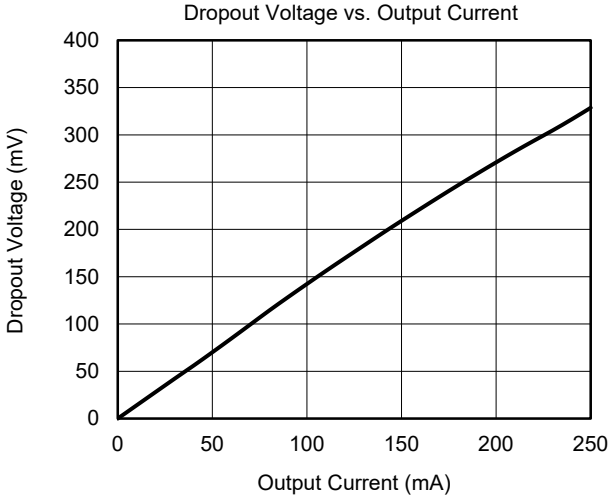

Output Voltage vs. Output Current

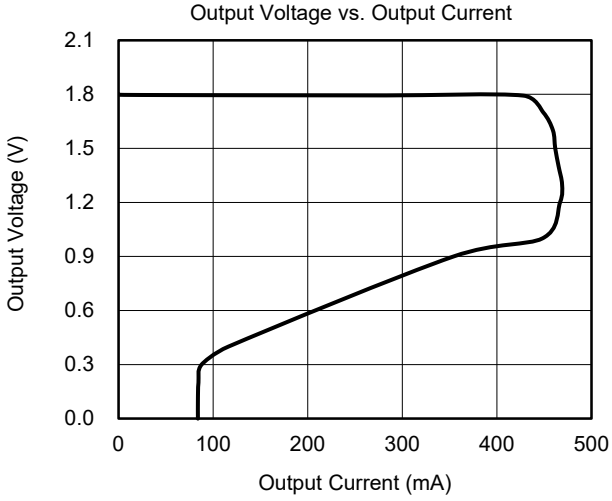

Ground Pin Current vs. Input Voltage

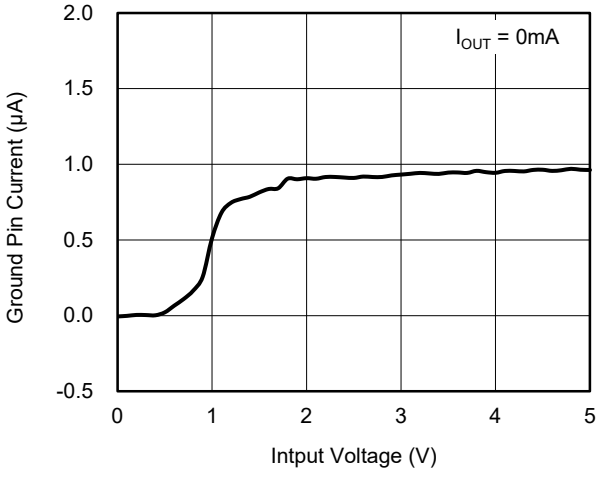

Output Voltage vs. Input Voltage

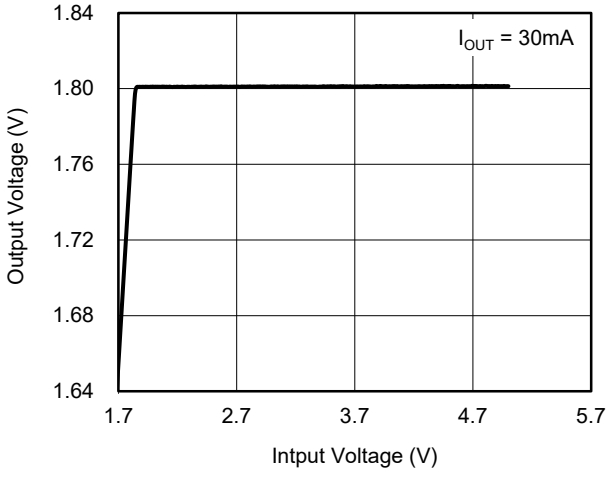

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

T_J = +25℃, V_{IN} = $V_{OUT(NOM)}$ + 1V, $V_{OUT(NOM)}$ = 1.8V, V_{EN} = 5V, C_{IN} = 1μF and C_{OUT} = 0.22μF, unless otherwise noted.

Output Voltage vs. Temperature

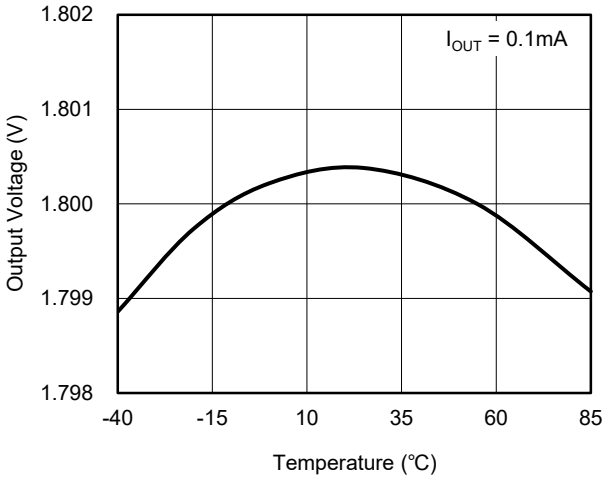

Supply Pin Current vs. Temperature

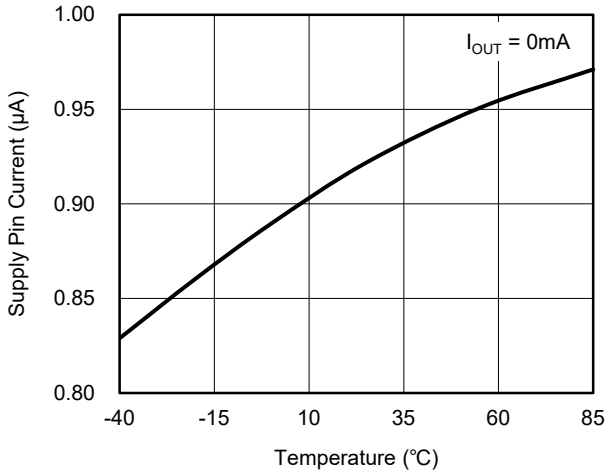

FUNCTIONAL BLOCK DIAGRAM

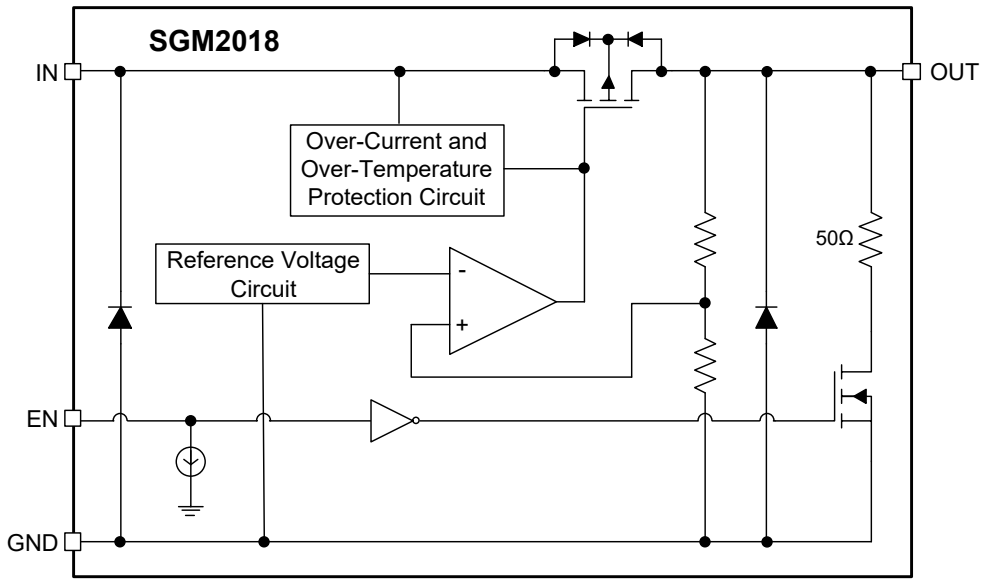

Figure 2. Block Diagram

APPLICATION INFORMATION

Input Capacitor Selection (C_{IN})

The input decoupling capacitor is necessary to be connected as close as possible to the IN pin for ensuring the device stability. 1μF or larger X7R or X5R ceramic capacitor is selected to get good dynamic performance.

When V_{IN} is required to provide large current instantaneously, a large effective input capacitor is required. Multiple input capacitors can limit the input tracking inductance. Adding more input capacitors is available to restrict the ringing and to keep it below the device absolute maximum ratings.

Output Capacitor Selection (C_{OUT})

The output decoupling capacitor should be located as close as possible to the OUT pin. 0.22μF or larger X7R or X5R ceramic capacitor is selected to get good dynamic performance. The minimum effective capacitance of C_{OUT} that SGM2018 can remain stable is 0.1μF. For ceramic capacitor, temperature, DC bias and package size will change the effective capacitance, so enough margin of C_{OUT} must be considered in design. Larger capacitance and lower ESR C_{OUT} will help improve the load transient response and increase the high frequency PSRR.

Output Current Limit and Short-Circuit Protection

When overload events happen, the output current is internally limited to 480mA (TYP). When the OUT pin is shorted to ground, the short-circuit protection will limit the output current to 100mA (TYP).

Reverse Current Protection

The SGM2018 incorporates reverse current protection circuit that prevents current flow backwards through the pass element when the output voltage is greater than the input voltage. A comparator senses the difference between the input and output voltages. When the difference between the output voltage and input voltage exceeds 800mV (TYP), the gate of the PFET is switched to V_{OUT} and the PFET is turned off. Otherwise , the gate voltage of the PFET is unfixed, and the reverse current may be (V_{OUT} - V_{IN}) / R_{ON}, R_{ON} = V_{DROP} / I_{OUT}.

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

NOVEMBER 2020 – REV.A.1 to REV.A.2	Page
Updated Application Information section	8

JUNE 2020 – REV.A to REV.A.1	Page
Updated Absolute Maximum Ratings section	2

Changes from Original (JANUARY 2020) to REV.A	Page
Changed from product preview to production data	All

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

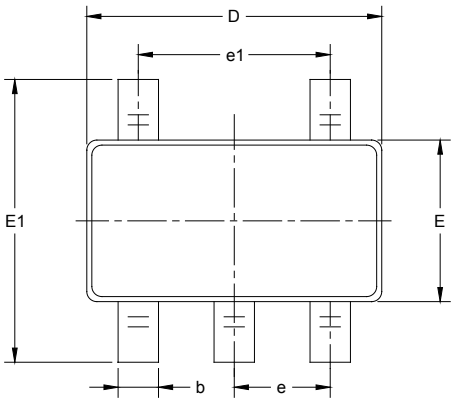

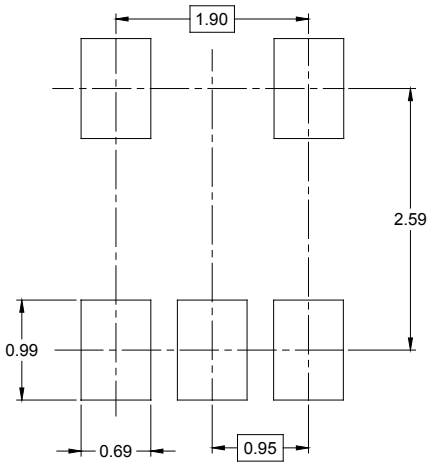

RECOMMENDED LAND PATTERN (Unit: mm)

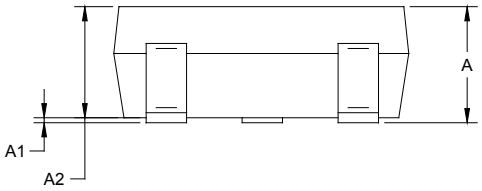

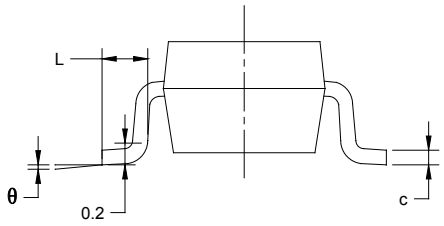

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS

UTDFN-1×1-4AL

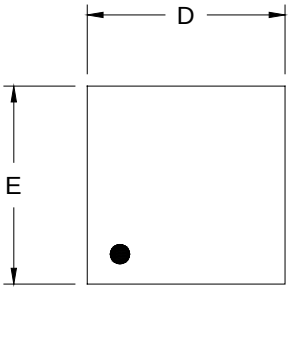

TOP VIEW

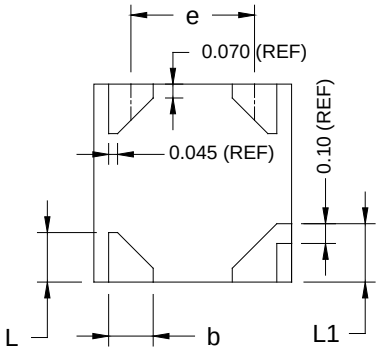

BOTTOM VIEW



SIDE VIEW

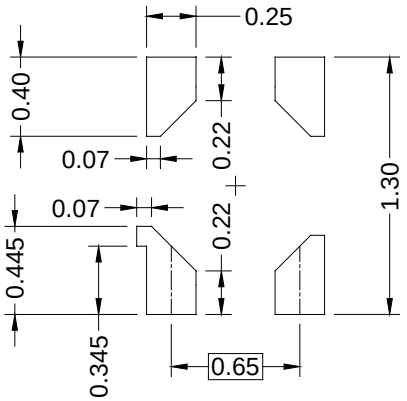

RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.500	0.550	0.600
A1	0.000		0.050
A2	0.152 REF		
e	0.625 BSC		
D	0.950	1.000	1.050
E	0.950	1.000	1.050
b	0.175	0.225	0.275
L	0.200	0.250	0.300
L1	0.245	0.295	0.345

TAPE AND REEL INFORMATION

REEL DIMENSIONS

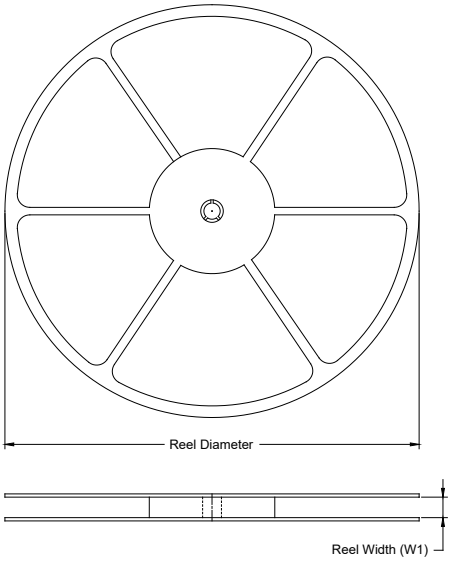

TAPE DIMENSIONS

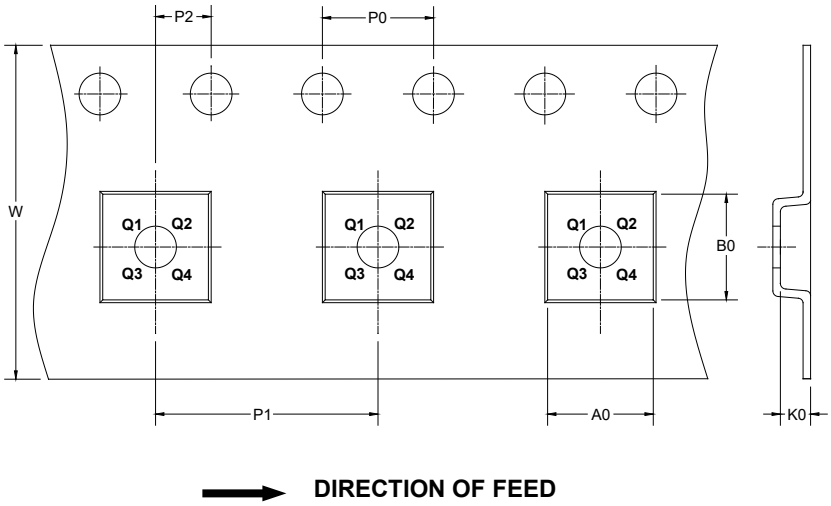

DIRECTION OF FEED

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7″	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3
UTDFN-1×1-4AL	7″	9.0	1.18	1.18	0.68	4.0	2.0	2.0	8.0	Q1

DD0001

CARTON BOX DIMENSIONS

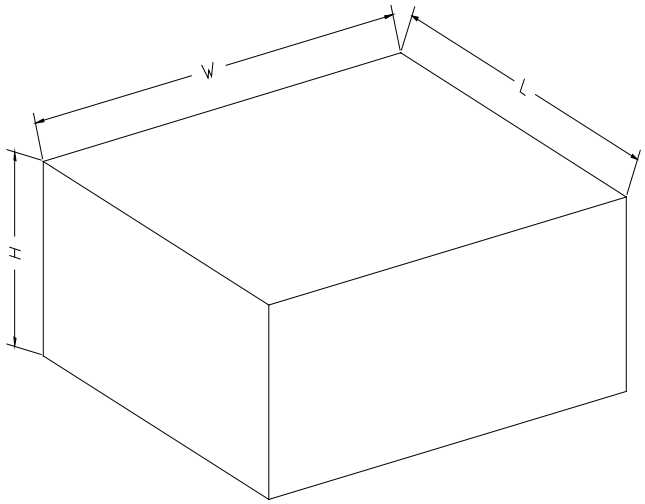

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7″ (Option)	368	227	224	8
7″	442	410	224	18

DD0002