

### GENERAL DESCRIPTION

The SGM2034 is an ultra-low current consumption, low dropout voltage and high accuracy linear regulator. It is capable of supplying 250mA output current with only 1 $\mu$ A (TYP) current consumption. The typical dropout voltage is only 70mV at 100mA. The operating input voltage range is from 1.7V to 7.5V and fixed output voltages are 1.2V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V, 3.6V, 3.8V, 4.0V, 4.5V and 5.0V.

Other features include short-circuit current limit and thermal shutdown protection.

The SGM2034 is available in Green SOT-23-3 and SOT-89-3 packages. It operates over an operating temperature range of -40°C to +85°C.

### FEATURES

- Operating Input Voltage Range: 1.7V to 7.5V
- Fixed Outputs of 1.2V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V, 3.6V, 3.8V, 4.0V, 4.5V and 5.0V
- 250mA Output Current
- High Output Voltage Accuracy:  $\pm 1.2\%$  at +25°C
- Ultra-Low Quiescent Current: 1 $\mu$ A (TYP)
- Low Dropout Voltage: 70mV (TYP) at 100mA
- Low Reverse Leakage Current:  
0.4 $\mu$ A (TYP) when  $V_{OUT} > V_{IN}$
- Current Limiting and Thermal Protection
- -40°C to +85°C Operating Temperature Range
- Available in Green SOT-23-3 and SOT-89-3 Packages

### APPLICATIONS

Wearable Device  
 Smart Phone  
 Portable Equipment

### TYPICAL APPLICATION

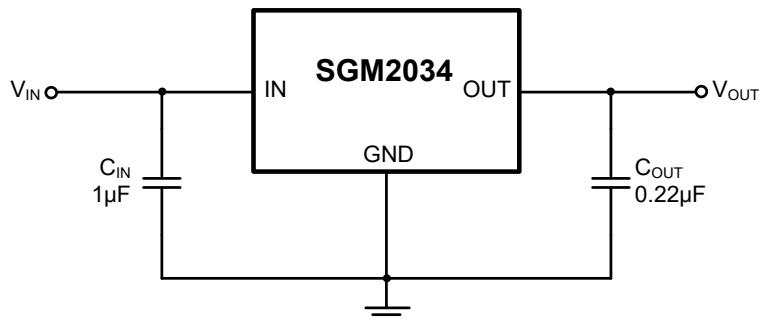


Figure 1. Typical Application Circuit

# SGM2034


# 1µA Ultra-Low Current Consumption and Low Dropout CMOS Voltage Regulator

## PACKAGE/ORDERING INFORMATION

| MODEL       | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER    | PACKAGE MARKING | PACKING OPTION      |
|-------------|---------------------|-----------------------------|--------------------|-----------------|---------------------|
| SGM2034-1.2 | SOT-23-3            | -40°C to +85°C              | SGM2034-1.2YN3G/TR | M90XX           | Tape and Reel, 3000 |
|             | SOT-89-3            | -40°C to +85°C              | SGM2034-1.2YK3G/TR | M8FXX           | Tape and Reel, 1000 |
| SGM2034-1.8 | SOT-23-3            | -40°C to +85°C              | SGM2034-1.8YN3G/TR | GRCXX           | Tape and Reel, 3000 |
|             | SOT-89-3            | -40°C to +85°C              | SGM2034-1.8YK3G/TR | GR2XX           | Tape and Reel, 1000 |
| SGM2034-2.5 | SOT-23-3            | -40°C to +85°C              | SGM2034-2.5YN3G/TR | M56XX           | Tape and Reel, 3000 |
|             | SOT-89-3            | -40°C to +85°C              | SGM2034-2.5YK3G/TR | M57XX           | Tape and Reel, 1000 |
| SGM2034-2.8 | SOT-23-3            | -40°C to +85°C              | SGM2034-2.8YN3G/TR | GR4XX           | Tape and Reel, 3000 |
|             | SOT-89-3            | -40°C to +85°C              | SGM2034-2.8YK3G/TR | GR3XX           | Tape and Reel, 1000 |
| SGM2034-3.0 | SOT-23-3            | -40°C to +85°C              | SGM2034-3.0YN3G/TR | GP9XX           | Tape and Reel, 3000 |
|             | SOT-89-3            | -40°C to +85°C              | SGM2034-3.0YK3G/TR | M2EXX           | Tape and Reel, 1000 |
| SGM2034-3.3 | SOT-23-3            | -40°C to +85°C              | SGM2034-3.3YN3G/TR | GRDXX           | Tape and Reel, 3000 |
|             | SOT-89-3            | -40°C to +85°C              | SGM2034-3.3YK3G/TR | GR5XX           | Tape and Reel, 1000 |
| SGM2034-3.6 | SOT-23-3            | -40°C to +85°C              | SGM2034-3.6YN3G/TR | GR7XX           | Tape and Reel, 3000 |
|             | SOT-89-3            | -40°C to +85°C              | SGM2034-3.6YK3G/TR | GR6XX           | Tape and Reel, 1000 |
| SGM2034-3.8 | SOT-23-3            | -40°C to +85°C              | SGM2034-3.8YN3G/TR | CKEXX           | Tape and Reel, 3000 |
| SGM2034-4.0 | SOT-23-3            | -40°C to +85°C              | SGM2034-4.0YN3G/TR | M97XX           | Tape and Reel, 3000 |
|             | SOT-89-3            | -40°C to +85°C              | SGM2034-4.0YK3G/TR | M98XX           | Tape and Reel, 1000 |
| SGM2034-4.5 | SOT-89-3            | -40°C to +85°C              | SGM2034-4.5YK3G/TR | GR8XX           | Tape and Reel, 1000 |
| SGM2034-5.0 | SOT-23-3            | -40°C to +85°C              | SGM2034-5.0YN3G/TR | GREXX           | Tape and Reel, 3000 |
|             | SOT-89-3            | -40°C to +85°C              | SGM2034-5.0YK3G/TR | GRAXX           | Tape and Reel, 1000 |

## MARKING INFORMATION

NOTE: XX = Date Code.



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS**

|   |                 |
|---|-----------------|
| IN to GND .....                         | -0.3V to 8V     |
| OUT to GND .....                        | -0.3V to 6V     |
| Package Thermal Resistance              |                 |
| SOT-23-3, $\theta_{JA}$ .....           | 283°C/W         |
| SOT-89-3, $\theta_{JA}$ .....           | 101°C/W         |
| Junction Temperature .....              | +150°C          |
| Storage Temperature Range .....         | -65°C to +150°C |
| Lead Temperature (Soldering, 10s) ..... | +260°C          |
| ESD Susceptibility                      |                 |
| HBM.....                                | 8000V           |
| MM.....                                 | 400V            |
| CDM .....                               | 1000V           |

**RECOMMENDED OPERATING CONDITIONS**

|   |                           |
|---|---------------------------|
| Input Voltage Range .....                     | 1.7V to 7.5V              |
| Input Effective Capacitance, $C_{IN}$ .....   | 0.5 $\mu$ F (MIN)         |
| Output Effective Capacitance, $C_{OUT}$ ..... | 0.1 $\mu$ F to 10 $\mu$ F |

Operating Junction Temperature Range..... -40°C to +85°C

**OVERSTRESS CAUTION**



Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

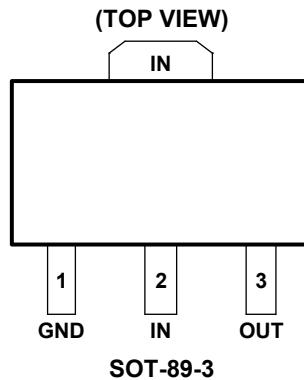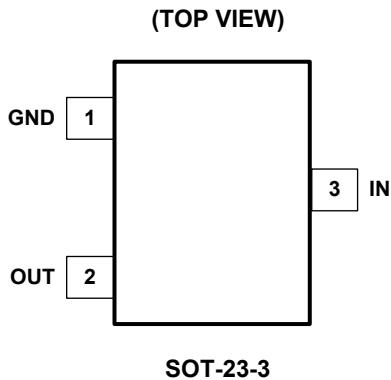**PIN CONFIGURATIONS****PIN DESCRIPTION**

| PIN      |          | NAME | FUNCTION  |
|----------|----------|------|---|
| SOT-23-3 | SOT-89-3 |      |   |
| 1        | 1        | GND  | Ground Pin.   |
| 2        | 3        | OUT  | Regulator Output Pin. It is recommended to use a ceramic capacitor with effective capacitance in the range of 0.1 $\mu$ F to 10 $\mu$ F to get good power supply decoupling. This ceramic capacitor should be placed as close as possible to OUT pin. |
| 3        | 2        | IN   | Input Supply Voltage Pin. It is recommended to use a 1 $\mu$ F or larger ceramic capacitor from IN pin to ground. This ceramic capacitor should be placed as close as possible to IN pin.   |

**ELECTRICAL CHARACTERISTICS**







( $V_{IN} = V_{OUT(NOM)} + 1V$ ,  $I_{OUT} = 0.1mA$ ,  $C_{IN} = 1\mu F$  and  $C_{OUT} = 0.22\mu F$ , Full =  $-40^{\circ}C$  to  $+85^{\circ}C$ , typical values are at  $T_J = +25^{\circ}C$ , unless otherwise noted.)

| PARAMETER   | SYMBOL  | CONDITIONS  |                                 | TEMP  | MIN  | TYP   | MAX | UNITS            |
|---|---|---|---------------------------------|-------|------|-------|-----|------------------|
| Input Voltage Range                                   | $V_{IN}$  |   |                                 | Full  | 1.7  |       | 7.5 | V                |
| Output Voltage Accuracy                               | $V_{OUT}$   | $V_{IN} = (V_{OUT(NOM)} + 1V)$ to 7.5V                                    |                                 | +25°C | -1.2 |       | 1.2 | %                |
| Maximum Output Current                                |   |   |                                 | +25°C | 250  |       |     | mA               |
| Output Current Limit                                  | $I_{LIMIT}$   |   |                                 | +25°C | 280  | 480   |     | mA               |
| Supply Pin Current                                    | $I_Q$   | No load   |                                 | Full  |      | 1.0   | 1.5 | $\mu A$          |
| Dropout Voltage <sup>(1)</sup>                        | $V_{DROP}$  | $I_{OUT} = 100mA$   | 1.8V $\leq V_{OUT(NOM)} < 2.5V$ | +25°C |      | 145   | 200 | mV               |
|   |   |   | 2.5V $\leq V_{OUT(NOM)} < 3.3V$ | +25°C |      | 100   | 130 |                  |
|   |   |   | 3.3V $\leq V_{OUT(NOM)} < 4.2V$ | +25°C |      | 85    | 110 |                  |
|   |   |   | 4.2V $\leq V_{OUT(NOM)} < 5.2V$ | +25°C |      | 75    | 100 |                  |
| Line Regulation                                       | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $V_{IN} = (V_{OUT(NOM)} + 1V)$ to 7.5V                                    |                                 | +25°C |      | 0.002 | 0.1 | %/V              |
| Load Regulation                                       | $\Delta V_{OUT}$                                      | $I_{OUT} = 0.1mA$ to 250mA  |                                 | +25°C |      | 3     | 15  | mV               |
| Short Current Limit                                   | $I_{SHORT}$   | $V_{OUT} = 0V$  |                                 | +25°C |      | 100   |     | mA               |
| Reverse Leakage Current <sup>(2)</sup>                | $I_{RL}$  | $V_{IN} = 1.7V$ , $V_{OUT} = 5.5V$  |                                 | +25°C |      | 0.4   |     | $\mu A$          |
| Power Supply Rejection Ratio                          | PSRR  | $I_{OUT} = 30mA$ , $V_{OUT} = 1.8V$ ,<br>$\Delta V_{RIPPLE} = 0.2V_{P-P}$ | $f = 217Hz$                     | +25°C |      | 38    |     | dB               |
|   |   |   | $f = 1kHz$                      | +25°C |      | 27    |     |                  |
| Output Voltage Temperature Coefficient <sup>(3)</sup> | $\frac{\Delta V_{OUT}}{\Delta T_J \times V_{OUT}}$    |   |                                 | Full  |      | 18    |     | ppm/ $^{\circ}C$ |
| Thermal Shutdown Temperature                          | $T_{SHDN}$  |   |                                 |       |      | 165   |     | $^{\circ}C$      |
| Thermal Shutdown Hysteresis                           | $\Delta T_{SHDN}$                                     |   |                                 |       |      | 30    |     | $^{\circ}C$      |

## NOTES:







1. The dropout voltage is defined as the difference between  $V_{IN}$  and  $V_{OUT}$  when  $V_{OUT}$  falls to  $95\% \times V_{OUT(NOM)}$ .
2. Reverse leakage current is the current flows from the output to the input when  $V_{OUT} > V_{IN}$ .
3. Output voltage temperature coefficient is defined as the worst-case voltage change divided by the total temperature range.

## TYPICAL PERFORMANCE CHARACTERISTICS

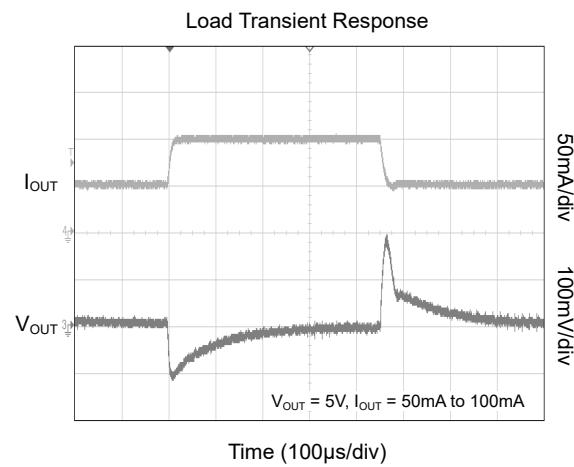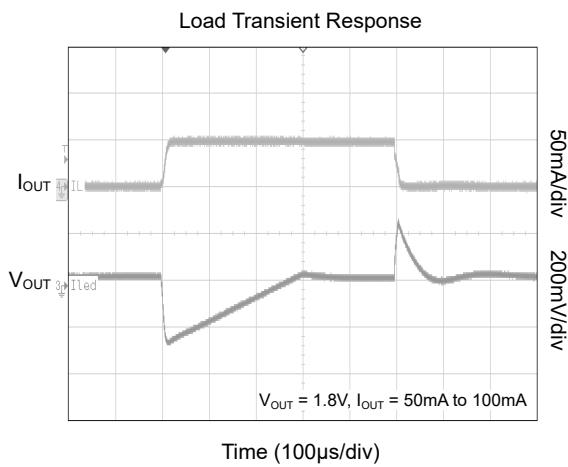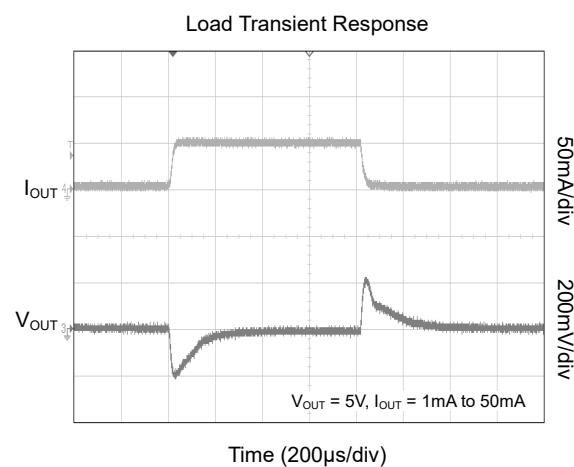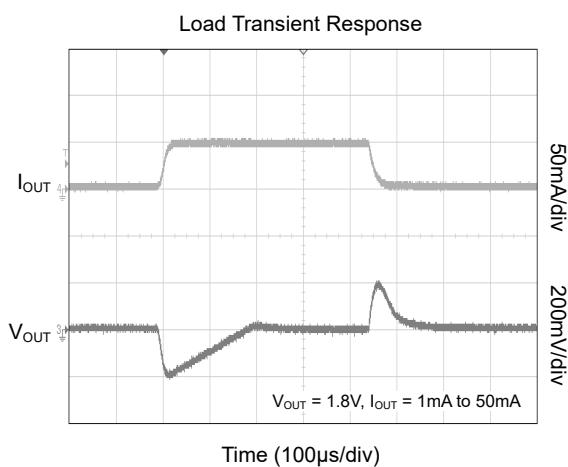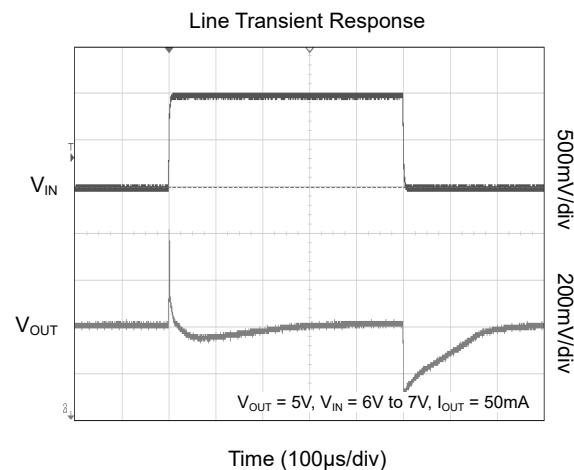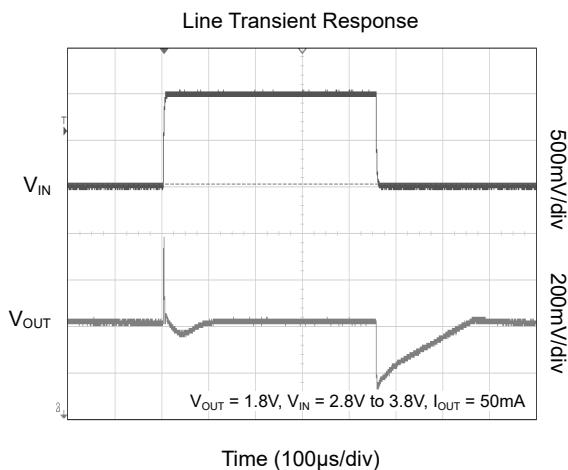 $T_J = +25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(\text{NOM})} + 1\text{V}$ ,  $C_{IN} = 1\mu\text{F}$  and  $C_{OUT} = 0.22\mu\text{F}$ , unless otherwise noted.







## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(\text{NOM})} + 1\text{V}$ ,  $C_{IN} = 1\mu\text{F}$  and  $C_{OUT} = 0.22\mu\text{F}$ , unless otherwise noted.

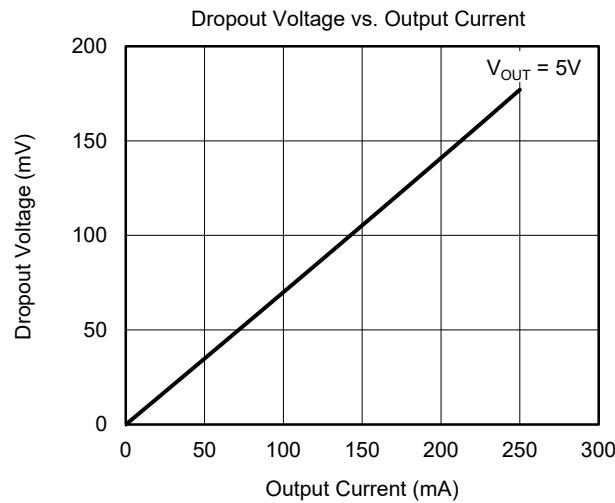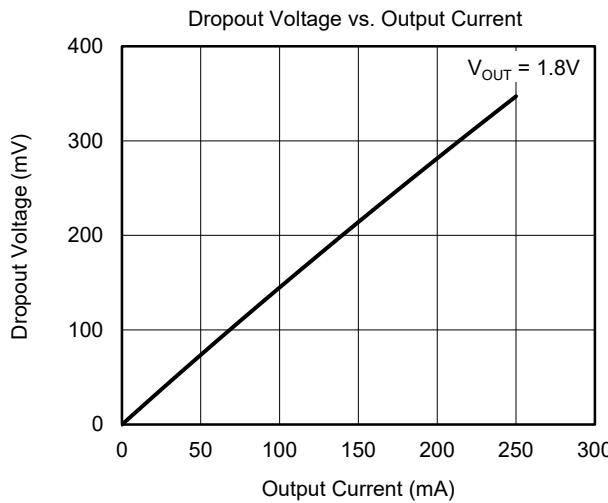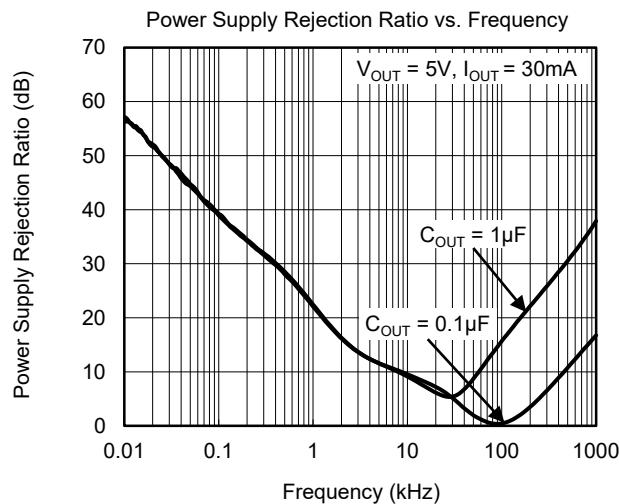
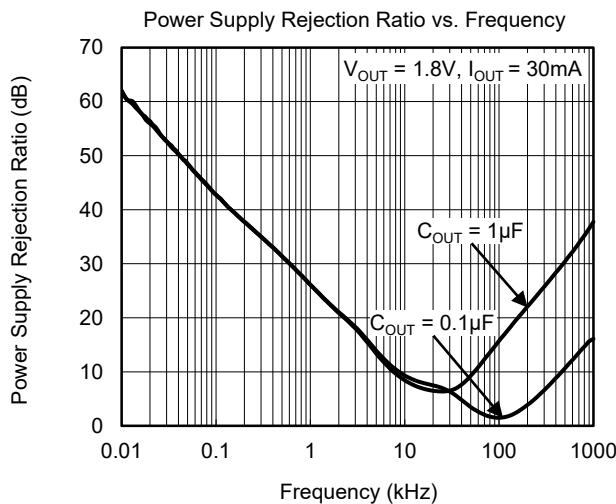
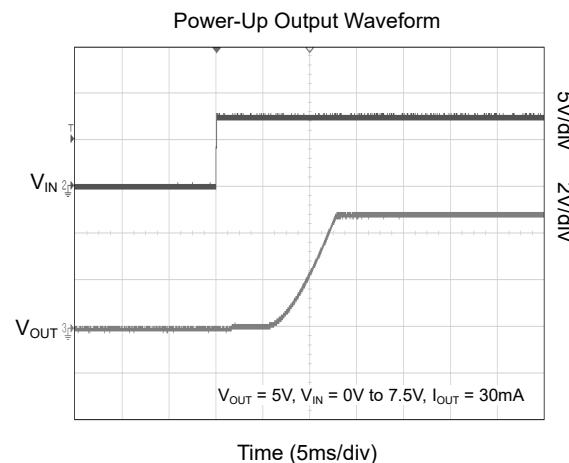
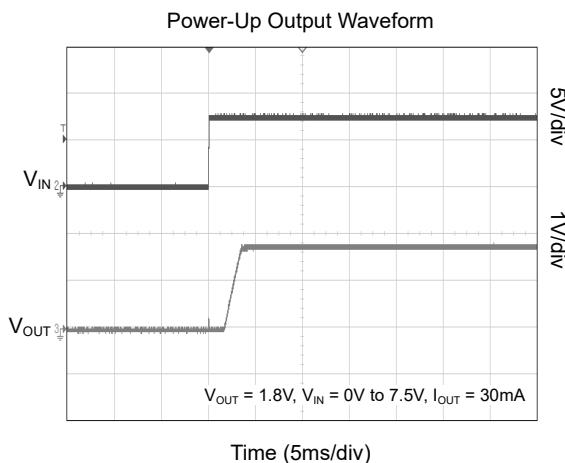


## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(\text{NOM})} + 1\text{V}$ ,  $C_{IN} = 1\mu\text{F}$  and  $C_{OUT} = 0.22\mu\text{F}$ , unless otherwise noted.

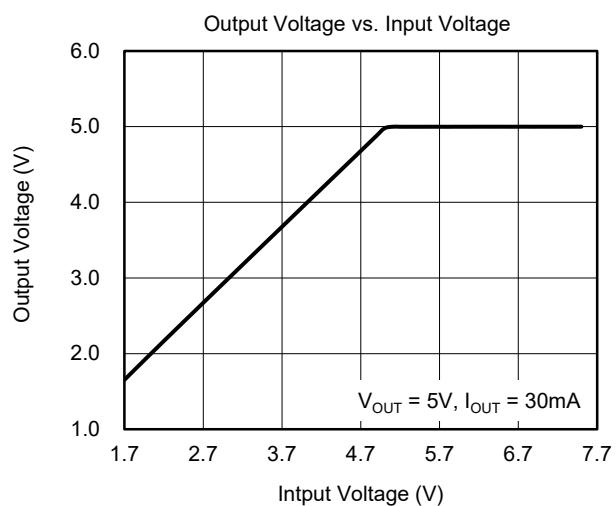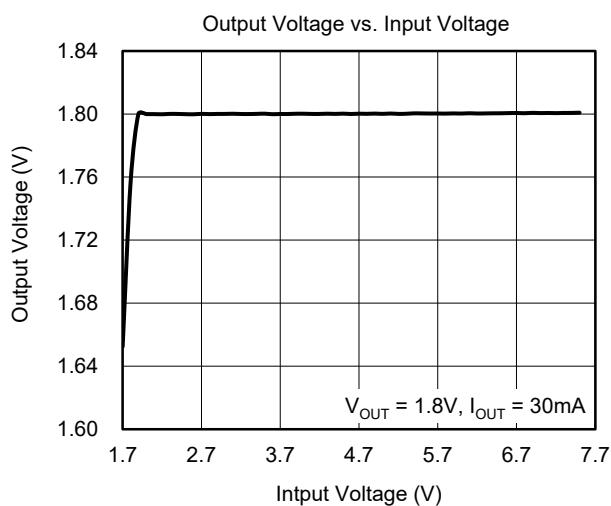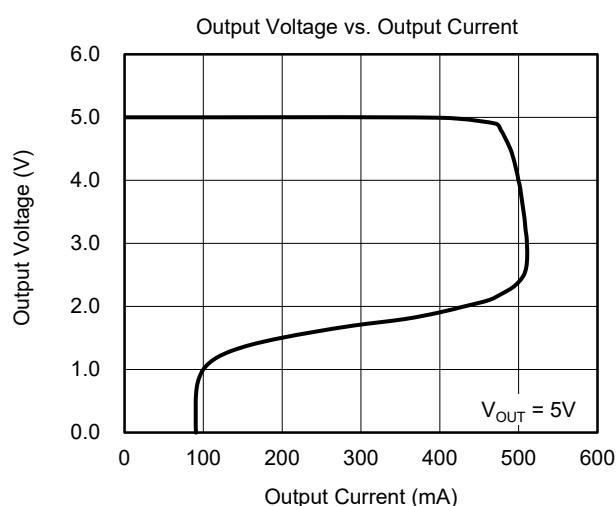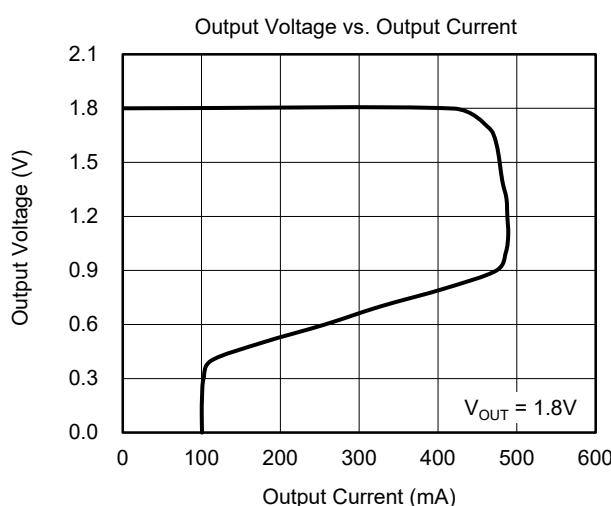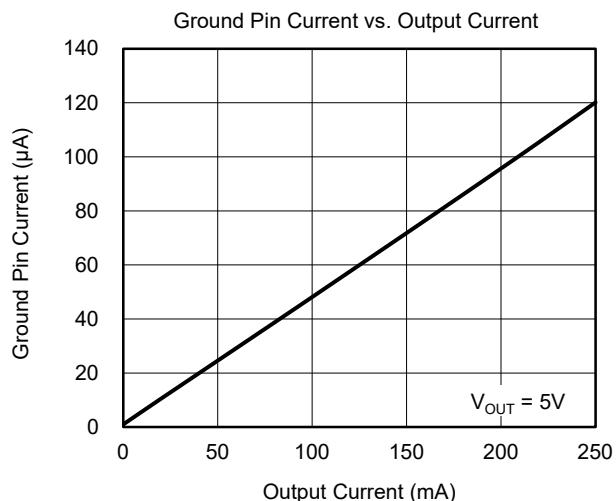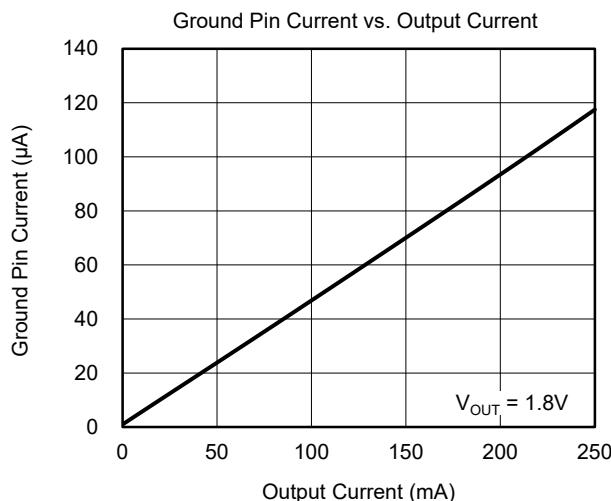

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

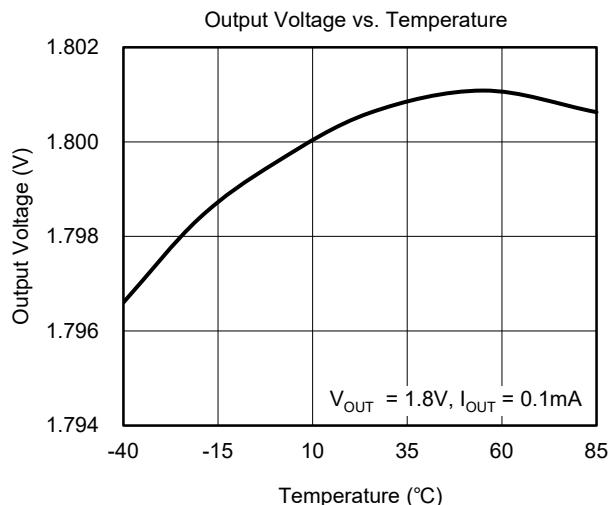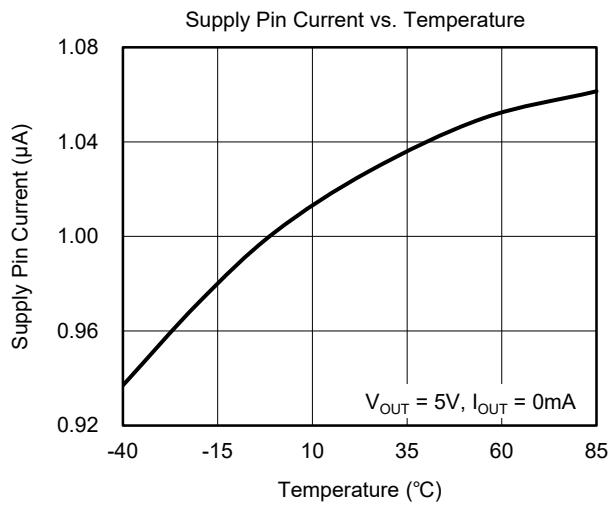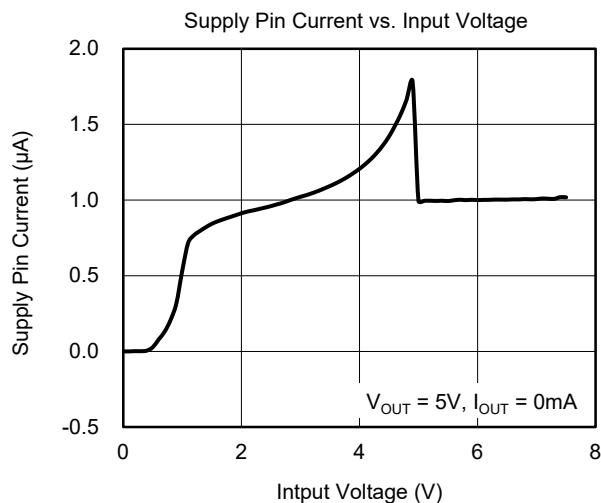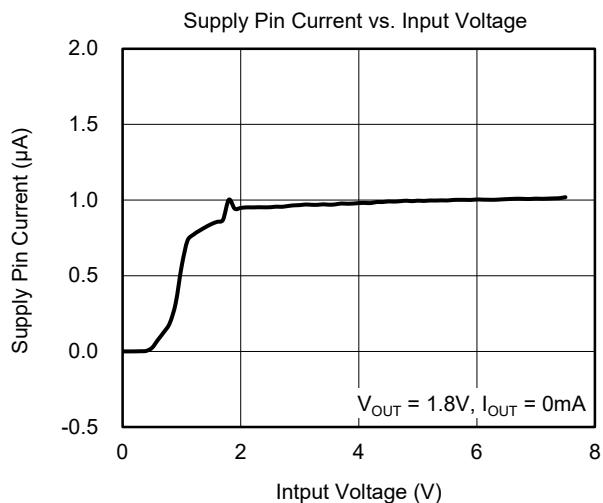 $T_J = +25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(\text{NOM})} + 1\text{V}$ ,  $C_{IN} = 1\mu\text{F}$  and  $C_{OUT} = 0.22\mu\text{F}$ , unless otherwise noted.

## FUNCTIONAL BLOCK DIAGRAM

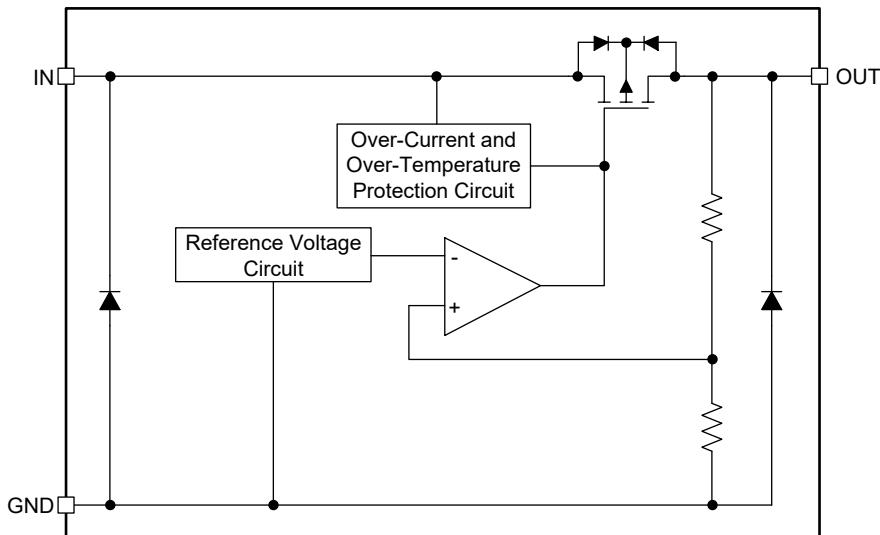


Figure 2. Block Diagram

## APPLICATION INFORMATION

**Input Capacitor Selection ( $C_{IN}$ )**

The input decoupling capacitor is necessary to be connected as close as possible to the IN pin for ensuring the device stability. 1 $\mu$ F or larger X7R or X5R ceramic capacitor is selected to get good dynamic performance.

When  $V_{IN}$  is required to provide large current instantaneously, a large effective input capacitor is required. Multiple input capacitors can limit the input tracking inductance. Adding more input capacitors is available to restrict the ringing and to keep it below the device absolute maximum ratings.

**Output Capacitor Selection ( $C_{OUT}$ )**

The output decoupling capacitor should be located as close as possible to the OUT pin. 0.22 $\mu$ F or larger X7R or X5R ceramic capacitor is selected to get good dynamic performance. The minimum effective capacitance of  $C_{OUT}$  that SGM2034 can remain stable is 0.1 $\mu$ F. For ceramic capacitor, temperature, DC bias and package size will change the effective capacitance, so enough margin of  $C_{OUT}$  must be considered in design. Larger capacitance and lower ESR  $C_{OUT}$  will

help improve the load transient response and increase the high frequency PSRR.

**Output Current Limit and Short-Circuit Protection**

When overload events happen, the output current is internally limited to 480mA (TYP). When the OUT pin is shorted to ground, the short-circuit protection will limit the output current to 100mA (TYP).

**Reverse Current Protection**

The SGM2034 incorporates reverse current protection circuit that prevents current flow backwards through the pass element when the output voltage is greater than the input voltage. A comparator senses the difference between the input and output voltages. When the difference between the output voltage and input voltage exceeds 800mV (TYP), the gate of the PFET is switched to  $V_{OUT}$  and the PFET is turned off. Otherwise, the gate voltage of the PFET is unfixed, and the reverse current may be  $(V_{OUT} - V_{IN}) / R_{ON}$ ,  $R_{ON} = V_{DROP} / I_{OUT}$ .

**REVISION HISTORY**



NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

|   | Page |
|---|------|
| <b>NOVEMBER 2020 – REV.A.2 to REV.A.3</b>                     |      |
| Updated Application Information section.....                  | .9   |
| <b>SEPTEMBER 2019 – REV.A.1 to REV.A.2</b>                    |      |
| Added SGM2034-4.0YN3G/TR and SGM2034-4.0YK3G/TR versions..... | All  |
| <b>JULY 2019 – REV.A to REV.A.1</b>                           |      |
| Added SGM2034-3.8YN3G/TR and SGM2034-4.5YK3G/TR versions..... | All  |
| <b>Changes from Original (DECEMBER 2018) to REV.A</b>         |      |
| Changed from product preview to production data .....         | All  |



## PACKAGE INFORMATION

### PACKAGE OUTLINE DIMENSIONS

SOT-23-3

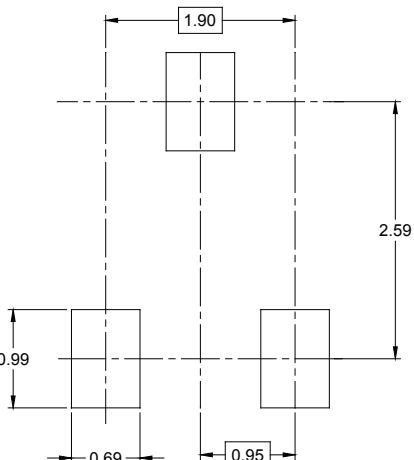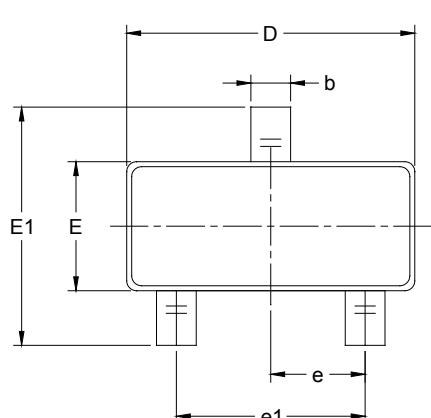

RECOMMENDED LAND PATTERN (Unit: mm)

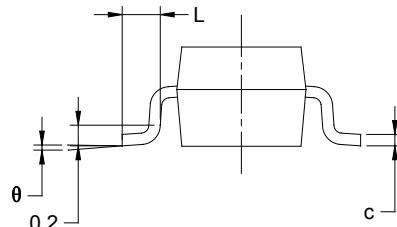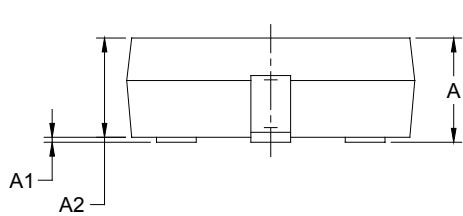


| Symbol | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|--------|------------------------------|-------|-------------------------|-------|
|        | MIN                          | MAX   | MIN                     | MAX   |
| A      | 1.050                        | 1.250 | 0.041                   | 0.049 |
| A1     | 0.000                        | 0.100 | 0.000                   | 0.004 |
| A2     | 1.050                        | 1.150 | 0.041                   | 0.045 |
| b      | 0.300                        | 0.500 | 0.012                   | 0.020 |
| c      | 0.100                        | 0.200 | 0.004                   | 0.008 |
| D      | 2.820                        | 3.020 | 0.111                   | 0.119 |
| E      | 1.500                        | 1.700 | 0.059                   | 0.067 |
| E1     | 2.650                        | 2.950 | 0.104                   | 0.116 |
| e      | 0.950 BSC                    |       | 0.037 BSC               |       |
| e1     | 1.900 BSC                    |       | 0.075 BSC               |       |
| L      | 0.300                        | 0.600 | 0.012                   | 0.024 |
| θ      | 0°                           | 8°    | 0°                      | 8°    |

# PACKAGE INFORMATION

## PACKAGE OUTLINE DIMENSIONS

SOT-89-3

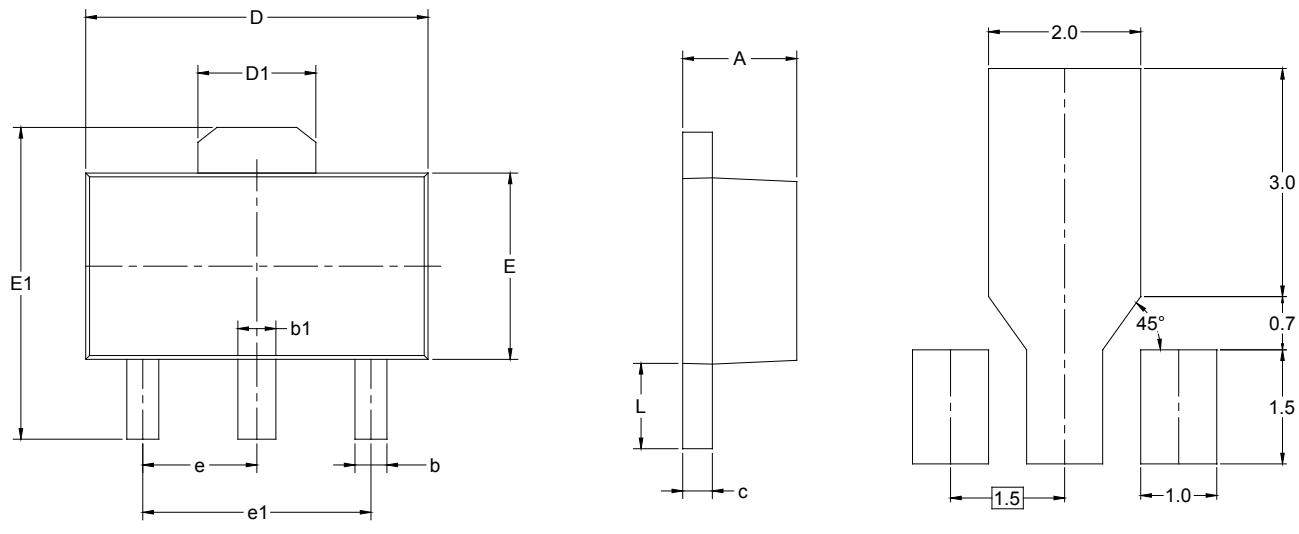


| Symbol | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|--------|------------------------------|-------|-------------------------|-------|
|        | MIN                          | MAX   | MIN                     | MAX   |
| A      | 1.400                        | 1.600 | 0.055                   | 0.063 |
| b      | 0.320                        | 0.520 | 0.013                   | 0.020 |
| b1     | 0.400                        | 0.580 | 0.016                   | 0.023 |
| c      | 0.350                        | 0.440 | 0.014                   | 0.017 |
| D      | 4.400                        | 4.600 | 0.173                   | 0.181 |
| D1     | 1.550 REF                    |       | 0.061 REF               |       |
| E      | 2.300                        | 2.600 | 0.091                   | 0.102 |
| E1     | 3.940                        | 4.250 | 0.155                   | 0.167 |
| e      | 1.500 TYP                    |       | 0.060 TYP               |       |
| e1     | 3.000 TYP                    |       | 0.118 TYP               |       |
| L      | 0.900                        | 1.200 | 0.035                   | 0.047 |


# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

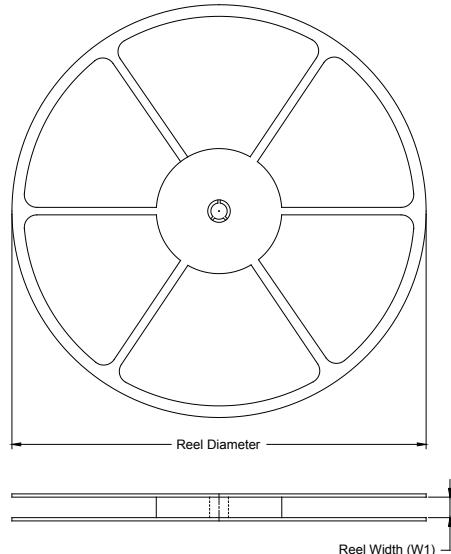

### TAPE DIMENSIONS

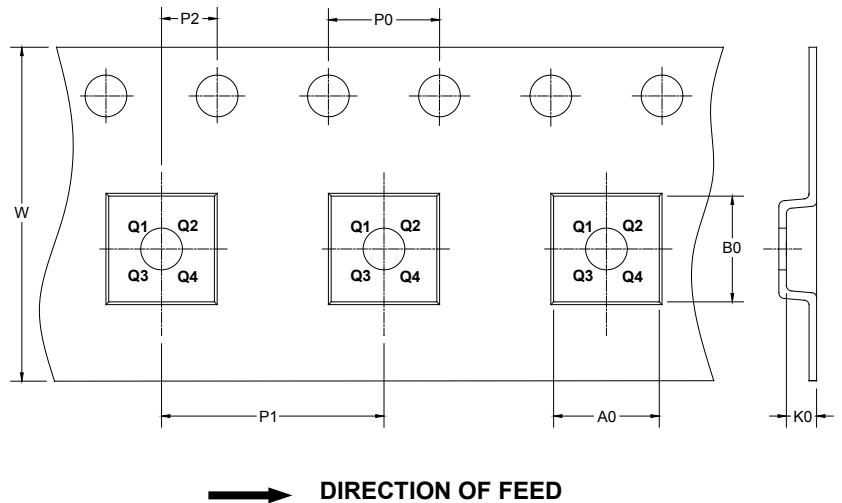

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SOT-23-3     | 7"            | 9.0                | 3.20    | 3.30    | 1.30    | 4.0     | 4.0     | 2.0     | 8.0    | Q3            |
| SOT-89-3     | 7"            | 13.2               | 4.85    | 4.45    | 1.85    | 4.0     | 8.0     | 2.0     | 12.0   | Q3            |

## PACKAGE INFORMATION

### CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF CARTON BOX

| Reel Type   | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-------------|-------------|------------|-------------|--------------|
| 7" (Option) | 368         | 227        | 224         | 8            |
| 7"          | 442         | 410        | 224         | 18           |

D0002