onsemi

Zener Diode Voltage Regulators

250 mW Wettable Flank

NZ8F Series

This series of Zener diodes is packaged in a X2DFNW2 surface mount package with an industry standard size of 0402 in. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand held portables, and automotive control units.

Specification Features

- Zener Breakdown Voltage Range -2.4 V to 47 V
 - Standard Tolerance Series NZ8FxxxMX2WT5G
 - Tight Tolerance Series NZ8FxxxSMX2WT5G
- Low Body Height: 0.016" (0.40 mm)
- Wettable Flank Package for optimal Automated Optical Inspection (AOI)
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant


MAXIMUM RATINGS Unit Rating Symbol Max P_D Total Device Dissipation FR-5 Board, 250 (Note 1) @ T_A = 25°C mW Derate above 25°C 1.5 mW/°C Total Device Dissipation FR-5 Board, P_D (Note 2) @ T_A = 25°C 500 mW Derate above 25°C 1.2 mW/°C Thermal Resistance from (Note 1) $R_{\theta JA}$ 415 °C/W Junction-to-Ambient (Note 2) 247 Non-Repetitive Peak Reverse Power (Note 3) 40 W P_{ZSM} Junction and Storage Temperature Range T_J, T_{stg} °C –65 to +150

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. FR-4 Minimum Pad, 1 oz. Cu.

2. FR-4 150 mm², 1 oz. Cu.

3. T_A = 25°C, t_p = 100 $\mu s.$



ORDERING INFORMATION

Device	Package	Shipping†
NZ8FxxxMX2WT5G,	X2DFNW2	8000 / Tape
SZNZ8FxxxMX2WT5G	(Pb-Free)	& Reel
NZ8FxxxSMX2WT5G,	X2DFNW2	8000 / Tape
SZNZ8FxxxSMX2WT5G	(Pb-Free)	& Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

DEVICE MARKING INFORMATION

See specific marking information in the device marking column of the Electrical Characteristics table on page 2 of this data sheet.

ELECTRICAL CHARACTERISTICS

(T_A = 25°C unless otherwise noted)

Symbol	Parameter					
VZ	Reverse Zener Voltage @ IZT					
I _{ZT}	Reverse Current					
Z _{ZT}	Maximum Zener Impedance @ I _{ZT}					
I _R	Reverse Leakage Current @ V _R					
V _R	Reverse Voltage					
I _F	Forward Current					
V _F	Forward Voltage @ I _F					
ΘVZ	Maximum Temperature Coefficient of VZ					
С	Max. Capacitance $@V_R = 0$ and f = 1 MHz					




Figure 1. Uni-directional Zener

ELECTRICAL CHARACTERISTICS (NZ8FxxxMX2W Standard Tolerance Series)

 $(V_F = 0.9 \text{ V Max} @ I_F = 10 \text{ mA for all types})$

Device*		Zener Voltage (Note 1)			Zener Impedance	Leakage Current		C@ V _B = 0 f
	Device	V _Z (Volts)		@ I _{ZT}	Z _{ZT} @ I _{ZT}	I _R @ V _R		= 1 MHz
	Marking	Min	Max	mA	Ω	μΑ	Volts	pF
NZ8F2V4MX2WT5G	AA	2.11	2.69	5	100	50	1	210
NZ8F2V7MX2WT5G	AC	2.43	2.97	5	100	20	1	210
NZ8F3V0MX2WT5G	AD	2.75	3.25	5	100	10	1	210
NZ8F3V3MX2WT5G	AE	3.05	3.55	5	100	10	1	210
NZ8F3V6MX2WT5G	AF	3.35	3.85	5	100	10	1	210
NZ8F3V9MX2WT5G	AG	3.65	4.15	5	100	5	1	210
NZ8F4V3MX2WT5G	AH	4.09	4.52	5	100	5	1	210
NZ8F4V7MX2WT5G	AJ	4.47	4.94	5	100	2	1	150
NZ8F5V1MX2WT5G	AK	4.85	5.36	5	80	2	1.5	130
NZ8F5V6MX2WT5G	AL	5.32	5.88	5	60	1	2.5	115
NZ8F6V2MX2WT5G	AM	5.89	6.51	5	60	1	3	110
NZ8F6V8MX2WT5G	AN	6.46	7.14	5	40	0.5	3.5	105
NZ8F7V5MX2WT5G	AQ	7.13	7.88	5	30	0.5	4	100
NZ8F8V2MX2WT5G	AP	7.79	8.61	5	30	0.5	5	90
NZ8F9V1MX2WT5G	AR	8.65	9.56	5	30	0.5	6	80
NZ8F10VMX2WT5G	AT	9.50	10.50	5	30	0.1	7	80
NZ8F11VMX2WT5G	AU	10.45	11.55	5	30	0.1	8	80
NZ8F12VMX2WT5G	AV	11.40	12.60	5	30	0.1	9	80
NZ8F13VMX2WT5G	AW	12.35	13.65	5	37	0.1	10	75
NZ8F15VMX2WT5G	AX	14.25	15.75	5	42	0.1	11	70
NZ8F16VMX2WT5G	AY	15.20	16.80	5	50	0.1	12	65
NZ8F18VMX2WT5G	AZ	17.10	18.90	5	50	0.1	14	60
NZ8F20VMX2WT5G	A2	19.00	21.00	5	55	0.1	15.4	55
NZ8F22VMX2WT5G	A3	20.90	23.10	5	55	0.1	16.8	55
NZ8F24VMX2WT5G	A4	22.80	25.20	5	70	0.1	18.9	50
NZ8F27VMX2WT5G	A5	25.65	28.35	5	80	0.1	22	50
NZ8F33VMX2WT5G	A6	31.35	34.65	5	95	0.1	26	45
NZ8F47VMX2WT5G	A7	44.65	49.35	2	170	0.1	38	40

*Includes SZ prefix where applicable: SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

NZ8F Series

ELECTRICAL CHARACTERISTICS (NZ8FxxxSMX2W Tight Tolerance Series)


 $(V_F = 0.9 \text{ V Max} @ I_F = 10 \text{ mA for all types})$

		Zener Voltage (Note 1)			Zener Impedance	Leakage Current		C@ V _R = 0 f
Device*	Device	V _Z (Volts)		@ I _{ZT}	Z _{ZT} @ I _{ZT}	I _R @ V _R		= 1 MHz
	Marking	Min	Max	mA	Ω	μΑ	Volts	pF
NZ8F2V4SMX2WT5G	CA	2.26	2.55	5	100	50	1	210
NZ8F2V7SMX2WT5G	CC	2.54	2.86	5	100	20	1	210
NZ8F3V0SMX2WT5G	CD	2.85	3.15	5	100	10	1	210
NZ8F3V3SMX2WT5G	CE	3.14	3.47	5	100	10	1	210
NZ8F3V6SMX2WT5G	CF	3.42	3.78	5	100	10	1	210
NZ8F3V9SMX2WT5G	CG	3.71	4.10	5	100	5	1	210
NZ8F4V3SMX2WT5G	СН	4.16	4.45	5	100	5	1	210
NZ8F4V7SMX2WT5G	CJ	4.59	4.81	5	100	2	1	150
NZ8F5V1SMX2WT5G	СК	4.98	5.22	5	80	2	1.5	130
NZ8F5V6SMX2WT5G	CL	5.47	5.73	5	60	1	2.5	115
NZ8F6V2SMX2WT5G	СМ	6.06	6.34	5	60	1	3	110
NZ8F6V8SMX2WT5G	CN	6.64	6.96	5	40	0.5	3.5	105
NZ8F7V5SMX2WT5G	CP	7.33	7.67	5	30	0.5	4	100
NZ8F8V2SMX2WT5G	CQ	8.01	8.39	5	30	0.5	5	90
NZ8F9V1SMX2WT5G	CR	8.89	9.31	5	30	0.5	6	80
NZ8F10VSMX2WT5G	СТ	9.77	10.23	5	30	0.1	7	80
NZ8F11VSMX2WT5G	CU	10.75	11.25	5	30	0.1	8	80
NZ8F12VSMX2WT5G	CV	11.72	12.28	5	30	0.1	9	80
NZ8F13VSMX2WT5G	CW	12.70	13.30	5	37	0.1	10	75
NZ8F15VSMX2WT5G	СХ	14.66	15.35	5	42	0.1	11	70
NZ8F16VSMX2WT5G	CY	15.63	16.37	5	50	0.1	12	65
NZ8F18VSMX2WT5G	CZ	17.59	18.41	5	50	0.1	14	60
NZ8F20VSMX2WT5G	C2	19.54	20.46	5	55	0.1	15.4	55
NZ8F22VSMX2WT5G	C3	21.49	22.51	5	55	0.1	16.8	55
NZ8F24VSMX2WT5G	C4	23.45	24.55	5	70	0.1	18.9	50
NZ8F27VSMX2WT5G	C5	26.38	27.62	5	80	0.1	22	50
NZ8F33VSMX2WT5G	C6	32.24	33.76	5	95	0.1	26	45
NZ8F47VSMX2WT5G	C7	45.92	48.08	2	170	0.1	38	40

*Includes SZ prefix where applicable: SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.


NZ8F Series


TYPICAL CHARACTERISTICS

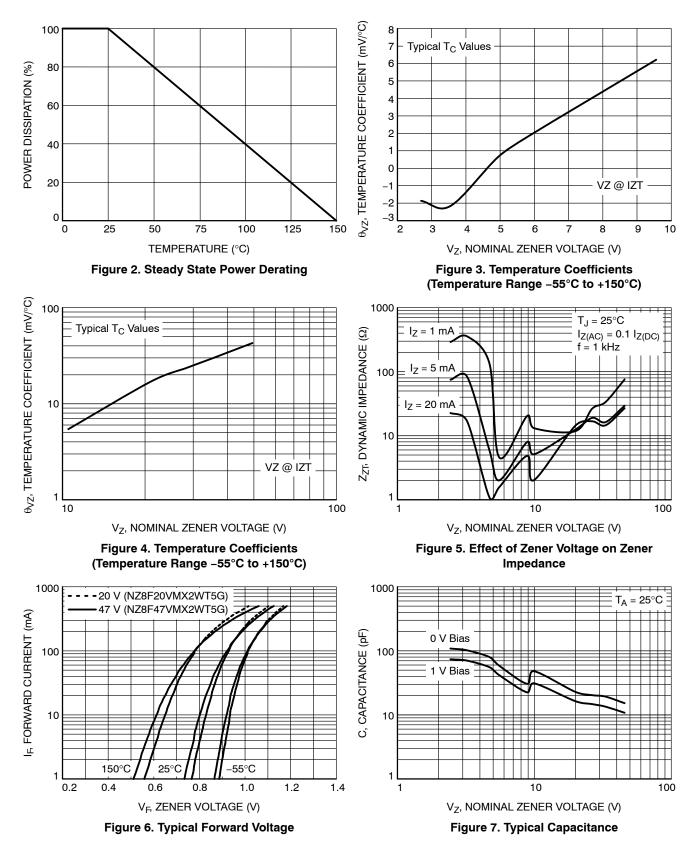

NZ8F Series


TYPICAL CHARACTERISTICS

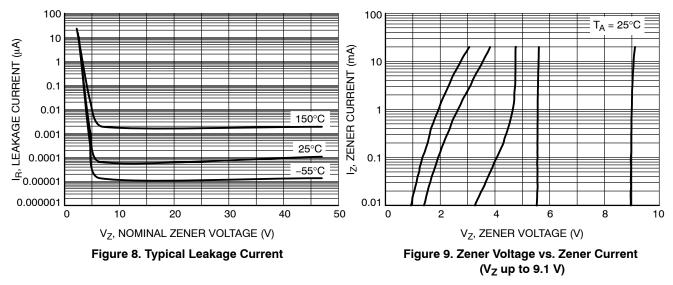



(V_Z = 9.1 V to 47 V)



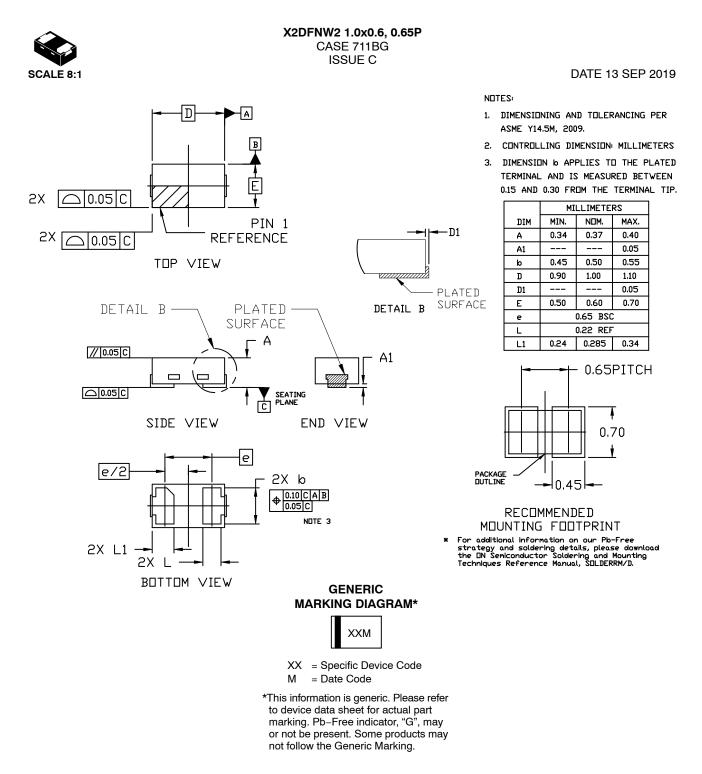

DOCUMENT NUMBER:	98AON15241G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	X2DFNW2 1.0X0.6, 0.65P		PAGE 1 OF 1			
ON Semiconductor and 🔟 are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the						

© Semiconductor Components Industries, LLC, 2019

rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcular performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

TECHNICAL SUPPORT

onsemi Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative