# NSR0115CQP6T5G

# Two Dual 15 V, 0.1 A Common Cathode Schottky Diodes

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Industry leading smallest surface mount package is excellent for hand-held and portable applications where space is limited.

#### **Features**

- Extremely Fast Switching Speed
- Low Forward Voltage 0.4 V (Max) @  $I_F = 10 \text{ mA}$
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### **Typical Applications**

- Portable Devices (Digital Cameras, MP3 Players ... etc)
- Mobile Phones
- Keyboards
- Low Voltage Motor Control (Disc Drives)

#### MAXIMUM RATINGS (T, I = 25°C unless otherwise noted)

Rating	Symbol	Value	Unit
Reverse Voltage	$V_R$	15	V
Forward Current (DC)	I <sub>F</sub>	100	mA
Repetitive Peak Forward Current	I <sub>FRM</sub>	0.3	Α
Non-Repetitive Peak Forward Current (t < 1.0 s)	I <sub>FSM</sub>	2.0	A

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

#### THERMAL CHARACTERISTICS

Rating	Symbol	Max	Unit
Total Device Dissipation T <sub>A</sub> = 25°C	P <sub>D</sub> (Note 1)	260	mW
Derate above 25°C		2.1	mW/°C
Thermal Resistance, Junction to Ambient	R <sub>θJA</sub> (Note 1)	480	°C/W
Total Device Dissipation $T_{\Delta} = 25^{\circ}C$	P <sub>D</sub> (Note 2)	360	mW
Derate above 25°C	, ,	2.9	mW/°C
Thermal Resistance, Junction to Ambient	R <sub>θJA</sub> (Note 2)	347	°C/W
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	–55 to +150	°C

- 1. FR-4 @ 10 mm<sup>2</sup>, 1 oz. copper trace, still air.
- 2. FR-4 @ 100 mm<sup>2</sup>, 1 oz. copper trace, still air.



## ON Semiconductor®

http://onsemi.com

#### MARKING DIAGRAM




SOT-963 CASE 527AD



XM = Specific Device Code M = Month Code

#### **PIN CONFIGURATION**



#### **ORDERING INFORMATION**


Device	Package	Shipping
NSR0115CQP6T5G	SOT-963 (Pb-Free)	8000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

### NSR0115CQP6T5G

# **ELECTRICAL CHARACTERISTICS** ( $T_A = 25^{\circ}C$ , Single Diode)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS	•		•	•
Reverse Breakdown Voltage (I <sub>R</sub> = 20 μA)	$V_{(BR)R}$	15	-	Vdc
Total Capacitance (V <sub>R</sub> = 1.0 V, f = 1.0 MHz)	C <sub>T</sub>	-	8.0	pF
Reverse Leakage (V <sub>R</sub> = 10 V)	I <sub>R</sub>	-	15	uA
Forward Voltage (I <sub>F</sub> = 10 μA)	V <sub>F</sub>		0.18	V
Forward Voltage (I <sub>F</sub> = 10 mA)	V <sub>F</sub>	-	0.4	V
Reverse Recovery Time $(I_F = I_R = 10 \text{ mA}, I_{R(REC)} = 1.0 \text{ mA}, Figure 1)$	t <sub>rr</sub>	-	5.0	ns

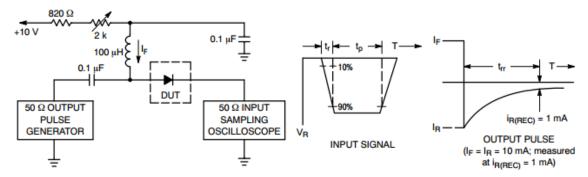

Notes: 1. A 2.0 k $\Omega$  variable resistor adjusted for a Forward Current (I<sub>F</sub>) of 10 mA. 2. Input pulse is adjusted so I<sub>R(peak)</sub> is equal to 10 mA.

Figure 1. Recovery Time Equivalent Test Circuit

## NSR0115CQP6T5G

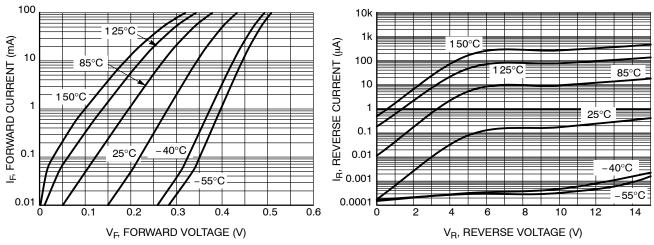


Figure 2. Forward Voltage

Figure 3. Leakage Current

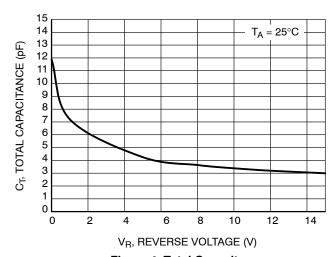


Figure 4. Total Capacitance

# **MECHANICAL CASE OUTLINE**








SOT-963 CASE 527AD-01 **ISSUE E** 

**DATE 09 FEB 2010** 











STYLE 1: PIN 1. EMITTER 1 2. BASE 1 3. COLLECTOR 2 4. EMITTER 2 5. BASE 2 6. COLLECTOR 1
STYLE 4: PIN 1. COLLECTOR 2. COLLECTOR 3. BASE 4. EMITTER 5. COLLECTOR 6. COLLECTOR
STYLE 7: PIN 1. CATHODE 2. ANODE 3. CATHODE 4. CATHODE 5. ANODE 6. CATHODE



STYLE 2: PIN 1. EMITTER 1 2. EMITTER2 3. BASE 2 4. COLLECTOR 2 5. BASE 1 6. COLLECTOR 1	STYLE 3: PIN 1. CATHODE 1 2. CATHODE 1 3. ANODE/ANODE 2 4. CATHODE 2 5. CATHODE 2 6. ANODE/ANODE 1
STYLE 5:	STYLE 6:
PIN 1. CATHODE 2. CATHODE	PIN 1. CATHODE 2. ANODE
3. ANODE	3. CATHODE
4. ANODE	4. CATHODE
5. CATHODE 6. CATHODE	5. CATHODE 6. CATHODE
STYLE 8:	STYLE 9:
PIN 1. DRAIN	PIN 1. SOURCE 1
2. DRAIN 3. GATE	2. GATE 1 3. DRAIN 2
4. SOURCE	4. SOURCE 2
5. DRAIN	5. GATE 2
6. DRAIN	6. DRAIN 1



## NOTES:

- DIMENSIONING AND TOLERANCING PER ASME
- DIMENSIONING AND TOLEHANCING PER ASM Y14.5M, 1994.
   CONTROLLING DIMENSION: MILLIMETERS
   MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS		
DIM	MIN	NOM	MAX
Α	0.34	0.37	0.40
b	0.10	0.15	0.20
С	0.07	0.12	0.17
D	0.95	1.00	1.05
E	0.75	0.80	0.85
е	0.35 BSC		
HE	0.95	1.00	1.05
L	0.19 REF		
L2	0.05	0.10	0.15

#### **GENERIC MARKING DIAGRAM\***




= Specific Device Code = Month Code Μ

\*This information is generic. Please refer to device data sheet for actual part marking.

Pb-Free indicator, "G" or microdot " ■", may or may not be present.

#### **RECOMMENDED MOUNTING FOOTPRINT**



DOCUMENT NUMBER:	98AON26456D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-963, 1X1, 0.35P		PAGE 1 OF 1

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative