NSR0230M2T5G, NSVR0230M2T5G

Schottky Barrier Diode

These Schottky barrier diodes are designed for high-speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand-held and portable applications where space is limited.

Features

- Extremely Fast Switching Speed
- Extremely Low Forward Voltage 0.325 V (max) @ $I_F = 10 \text{ mA}$
- Low Reverse Current
- AEC Qualified and PPAP Capable
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements
- This is a Pb-Free Device*

MAXIMUM RATINGS

| Symbol | Value | Unit |
|------------------|----------------|---|
| V _R | 30 | Vdc |
| I _F | 200 | mA |
| I _{FSM} | 1.0 | А |
| | V _R | V _R 30 I _F 200 I _{FSM} |

ESD Rating: Class 3B per Human Body Model Class C per Machine Model

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|---|-----------------------------------|----------------|-------------|
| Total Device Dissipation FR-5 Board, (Note 1) T _A = 25°C Derate above 25°C | P _D | 167 2.0 | mW mW/°C |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 600 | °C/W |
| Junction and Storage Temperature Range | T _J , T _{stg} | -55 to +125 | °C |

1. FR-5 Minimum Pad.



ON Semiconductor®

http://onsemi.com


30 V SCHOTTKY BARRIER DIODE



SOD-723 CASE 509AA PLASTIC



MARKING DIAGRAM



7C = Specific Device Code

M = Month Code■ = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

| Device | Package | Shipping† |
|---------------|----------------------|---------------------------------|
| NSR0230M2T5G | SOD-723 (Pb-Free) | 2 mm Pitch 8,000/Tape & Reel |
| NSVR0230M2T5G | SOD-723 (Pb-Free) | 2 mm Pitch 8,000/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

^{*}For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

NSR0230M2T5G, NSVR0230M2T5G

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

| Characteristic | Symbol | Min | Тур | Max | Unit |
|--|----------------|--------|-----|----------------|------|
| Reverse Leakage $(V_R = 10 \text{ V})$ $(V_R = 30 \text{ V})$ | I _R | - | | 10 100 | μΑ |
| Forward Voltage (I _F = 10 mA) (I _F = 200 mA) | V _F | - - | - | 0.325 0.500 | Vdc |

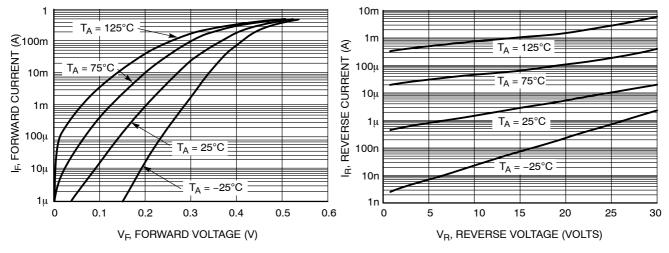


Figure 1. Forward Characteristics

Figure 2. Reverse Characteristics


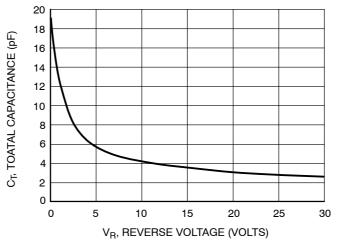


Figure 3. Total Capacitance




SOD-723 CASE 509AA-01 ISSUE O

DATE 02 MAR 2005



SOLDERING FOOTPRINT*



SOD-723

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- Y14.5M, 1982.

 CONTROLLING DIMENSION: MILLIMETER.

 MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF DACK MATERIAL. BASE MATERIAL.

| | MILLIMETERS | | | INCHES | | |
|-----|-------------|------|------|--------|--------|--------|
| DIM | MIN | NOM | MAX | MIN | NOM | MAX |
| Α | 0.49 | 0.52 | 0.55 | 0.019 | 0.020 | 0.022 |
| b | 0.25 | 0.28 | 0.32 | 0.0098 | 0.011 | 0.013 |
| С | 0.08 | 0.12 | 0.15 | 0.0032 | 0.0047 | 0.0059 |
| D | 0.95 | 1.00 | 1.05 | 0.037 | 0.039 | 0.041 |
| E | 0.55 | 0.60 | 0.65 | 0.022 | 0.024 | 0.026 |
| HE | 1.35 | 1.40 | 1.45 | 0.053 | 0.055 | 0.057 |
| L | 0.15 | 0.20 | 0.25 | 0.006 | 0.0079 | 0.010 |

GENERIC MARKING DIAGRAM*



XX = Specific Device Code Μ = Date Code

*This information is generic. Please refer to device data sheet for actual part marking.

Pb-Free indicator, "G" or microdot " ■", may or may not be present.

| DOCUMENT NUMBER: | 98AON20359D | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | |
|------------------|----------------------------------|---|-------------|--|
| DESCRIPTION: | SOD-723, 2-LEAD, 1.4X0.6X0.52 MM | | PAGE 1 OF 1 | |

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative