

TinyLogic UHS Dual 2-Input NOR Gate NC7WZ02

Description

The NC7WZ02 is a dual 2–Input NOR Gate from **onsemi**'s Ultra High Speed Series of TinyLogic. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a very broad V_{CC} operating range. The device is specified to operate over the 1.65 V to 5.5 V V_{CC} range. The inputs and output are high impedance when V_{CC} is 0 V. Inputs tolerate voltages up to 6.5 V independent of V_{CC} operating voltage.

Features

- Space Saving US8 Surface Mount Package
- MicroPakTM Pb-Free Leadless Package
- Ultra High Speed: $t_{PD} = 2.4$ ns Typ. into 50 pF at 5 V V_{CC}
- High Output Drive: ±24 mA at 3 V V_{CC}
- Broad V_{CC} Operating Range: 1.65 V to 5.5 V
- Matches the Performance of LCX when Operated at 3.3 V V_{CC}
- Power Down High Impedance Inputs / Output
- Overvoltage Tolerant Inputs Facilitate 5 V to 3 V Translation
- Proprietary Noise / EMI Reduction Circuitry Implemented
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant




Figure 1. Logic Symbol

MARKING DIAGRAMS



UQFN8 1.6X1.6, 0.5P CASE 523AY





US8 CASE 846AN



P5, WZ02 = Specific Device Code

KK = 2-Digit Lot Run Traceability Code XY = 2-Digit Date Code Format Z = Assembly Plant Code

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 6 of this data sheet.

1

Connection Diagrams




Figure 2. Pin Assignment for US8 (Top View)





Figure 4. Pad Assignments for MicroPak (Top Through View)



AAA represents Product Code Top Mark - see ordering code

NOTE: Orientation of Top Mark determines Pin One location. Read the top product code mark left to right, Pin One is the lower left pin (see diagram).

Figure 3. US8 Pin One Orientation Diagram

PIN DESCRIPTION

| Pin Names | Description |
|---------------------------------|-------------|
| A _n , B _n | Inputs |
| Y _n | Output |

FUNCTION TABLE $(Y = \overline{A + B})$

| Inp | Output | | |
|-----|--------|---|--|
| Α | A B | | |
| L | L | Н | |
| L | Н | L | |
| Н | L | L | |
| Н | Н | L | |

H = HIGH Logic Level L = LOW Logic Level

NC7WZ02

ABSOLUTE MAXIMUM RATINGS

| Symbol | Param | Min | Max | Unit | |
|------------------------------------|---|------------------------|------|------|----|
| V _{CC} | Supply Voltage | -0.5 | 6.5 | V | |
| V _{IN} | DC Input Voltage | | -0.5 | 6.5 | V |
| V _{OUT} | DC Output Voltage | | -0.5 | 6.5 | V |
| I _{IK} | DC Input Diode Current | V _{IN} < 0 V | - | -50 | mA |
| l _{ok} | DC Output Diode Current | V _{OUT} < 0 V | - | -50 | mA |
| I _{OUT} | DC Output Current | - | ±50 | mA | |
| I _{CC} / I _{GND} | DC V _{CC} / GND Current | | - | ±100 | mA |
| T _{STG} | Storage Temperature | | -65 | +150 | °C |
| TJ | Junction Temperature under Bias | | - | 150 | °C |
| T _L | Junction Lead Temperature (Soldering, 10 Seconds) | | - | 260 | °C |
| P_{D} | Power Dissipation in Still Air US8 | | - | 500 | mW |
| | | MicroPak-8 | - | 539 | 1 |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

RECOMMENDED OPERATING CONDITIONS

| Symbol | | Parameter | Min | Max | Unit |
|---------------------------------|--------------------------|---|------|-----------------|------|
| V _{CC} | Supply Voltage Operating | | 1.65 | 5.5 | V |
| | Supply Voltage Data Rete | ntion | 1.5 | 5.5 | |
| V _{IN} | Input Voltage | | 0 | 5.5 | V |
| V _{OUT} | Output Voltage | | 0 | V _{CC} | V |
| T _A | Operating Temperature | | -40 | +85 | °C |
| t _r , t _f | Input Rise and Fall Time | V _{CC} @ 1.8 V ±0.15 V, 2.5 V ±0.2 V | 0 | 20 | ns/V |
| | | V _{CC} @ 3.3 V ±0.3 V | 0 | 10 | |
| | | V _{CC} @ 5.0 V ±0.5 V | 0 | 5 | |
| $\theta_{\sf JA}$ | Thermal Resistance | US8 | - | 250 | °C/W |
| | | MicroPak-8 | - | 232 | |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

1. Unused inputs must be held HIGH or LOW. They may not float.

NC7WZ02

DC ELECTICAL CHARACTERISTICS


| | | | | T _A = +25°C | | | T _A = -40 to +85°C | | |
|------------------|--|--|---------------------|------------------------|------|----------------------|-------------------------------|----------------------|------|
| Symbol | Parameter | Conditions | V _{CC} (V) | Min | Тур | Max | Min | Max | Unit |
| V _{IH} | HIGH Level Input Voltage | | 1.65 to 1.95 | 0.65 V _{CC} | - | _ | 0.65 V _{CC} | - | V |
| | | | 2.3 to 5.5 | 0.70 V _{CC} | - | - | 0.70 V _{CC} | - | |
| V _{IL} | LOW Level Input Voltage | | 1.65 to 1.95 | _ | - | 0.35 V _{CC} | - | 0.35 V _{CC} | V |
| | | | 2.3 to 5.5 | - | - | 0.30 V _{CC} | - | 0.30 V _{CC} | |
| V _{OH} | HIGH Level Output Voltage | $V_{IN} = V_{IH} \text{ or } V_{IL}$ | 1.65 | 1.55 | 1.65 | - | 1.55 | - | V |
| | | $I_{OH} = -100 \mu A$ | 2.3 | 2.2 | 2.3 | - | 2.2 | - | |
| | | | 3.0 | 2.9 | 3.0 | - | 2.9 | - | |
| | | | 4.5 | 4.4 | 4.5 | - | 4.4 | - | |
| | | $I_{OH} = -4 \text{ mA}$ | 1.65 | 1.29 | 1.52 | - | 1.29 | - | |
| | | I _{OH} = -8 mA | 2.3 | 1.9 | 2.15 | - | 1.9 | - | |
| | | I _{OH} = -16 mA | 3.0 | 2.4 | 2.80 | - | 2.4 | - | |
| | | I _{OH} = -24 mA | 3.0 | 2.3 | 2.68 | - | 2.3 | - | 1 |
| | I _{OH} = -32 mA | 4.5 | 3.8 | 4.20 | - | 3.8 | - | | |
| V _{OL} | V _{OL} LOW Level Output Voltage | $V_{IN} = V_{IH} \text{ or } V_{IL}$ | 1.65 | _ | 0.0 | 0.1 | - | 0.1 | ٧ |
| | | I _{OL} = 100 μA | 2.3 | _ | 0.0 | 0.1 | - | 0.1 | |
| | | | 3.0 | _ | 0.0 | 0.1 | - | 0.1 | |
| | | | 4.5 | - | 0.0 | 0.1 | - | 0.1 | |
| | | I _{OL} = 4 mA | 1.65 | - | 0.08 | 0.24 | _ | 0.24 | |
| | | I _{OL} = 8 mA | 2.3 | - | 0.10 | 0.3 | - | 0.3 | |
| | | I _{OL} = 16 mA | 3.0 | _ | 0.15 | 0.4 | - | 0.4 | ┪ |
| | | I _{OL} = 24 mA | 3.0 | - | 0.22 | 0.55 | - | 0.55 | |
| | I _{OL} = 32 mA | 4.5 | - | 0.22 | 0.55 | - | 0.55 | | |
| I _{IN} | Input Leakage Current | V _{IN} = 5.5 V, GND | 1.65 to 5.5 | - | - | ±0.1 | _ | ±1.0 | μΑ |
| I _{OFF} | Power Off Leakage Current | V _{IN} or V _{OUT} = 5.5 V | 0.0 | - | - | 1 | _ | 10 | μΑ |
| I _{CC} | Quiescent Supply Current | V _{IN} = 5.5 V, GND | 1.65 to 5.5 | - | - | 1 | _ | 10 | μΑ |

AC ELECTRICAL CHARACTERISTICS

| | | | | T _A = +25°C | | T _A = -40 | to +85°C | | |
|-------------------------------------|-------------------------------|--------------------------------------|---------------------|------------------------|------|----------------------|----------|-----|------|
| Symbol | Parameter | Conditions | V _{CC} (V) | Min | Тур | Max | Min | Max | Unit |
| t _{PLH} , t _{PHL} | Propagation Delay | $R_L = 1 M\Omega$, | 1.8 ±0.15 | - | 5.4 | 9.8 | - | 10 | ns |
| | (Figure 5, 7) | C _L = 15 pF | 2.5 ±0.2 | - | 3.3 | 5.4 | - | 5.8 | |
| | | | 3.3 ±0.3 | - | 2.5 | 3.8 | - | 4.1 | |
| | | | 5.0 ±0.5 | - | 2.0 | 3.0 | - | 3.3 | |
| | | $R_L = 500 \Omega,$ $C_L = 50 pF$ | 3.3 ±0.3 | - | 3.1 | 4.6 | - | 5.0 | |
| | | OL = 50 pr | 5.0 ±0.5 | - | 2.4 | 3.7 | - | 4.0 | |
| C _{IN} | Input Capacitance | | 0 | - | 2.5 | - | - | - | pF |
| | Power Dissipation Capacitance | (Note 2) | 3.3 | - | 13.5 | - | - | - | pF |
| | (Figure 6) | | 5.0 | - | 17.5 | - | - | - | |

C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. (see Figure 6) C_{PD} is related to I_{CCD} dynamic operating current by the expression: C_{PD} = I_{CCD} / (V_{CC}) (F).

AC Loading and Waveforms



* C_L includes load and stray capacitance Input PRR = 1.0 MHz, t_W = 500 ns

INPUT O

Input = AC Waveform; $t_r = t_f = 1.8$ ns; PRR = 10 MHz; Duty Cycle = 50%.

Figure 5. AC Test Circuit

Figure 6. I_{CCD} Test Circuit




Figure 7. AC Waveforms

NC7WZ02

ORDERING INFORMATION

| Order Number | Top Mark | Package | Shipping [†] |
|-------------------|----------|---|-----------------------|
| NC7WZ02K8X | WZ02 | 8-Lead US8, JEDEC MO-187, Variation CA 3.1 mm Wide | 3000 / Tape & Reel |
| NC7WZ02L8X | P5 | 8-Lead MicroPak, 1.6 mm Wide | 5000 / Tape & Reel |
| NC7WZ02L8X-L22185 | P5 | 8-Lead MicroPak, 1.6 mm Wide | 5000 / Tape & Reel |


[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


3. Pb–Free package per JEDEC J–STD–020B.


MicroPak is trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.


UQFN8 1.6X1.6, 0.5P CASE 523AY ISSUE O

DATE 31 AUG 2016





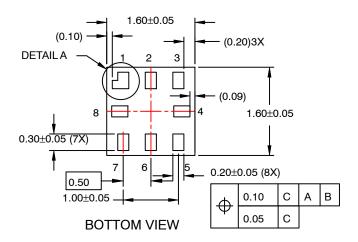




RECOMMENDED LAND PATTERN

NOTES:

- A. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.
- D. LAND PATTERN RECOMMENDATION IS EXISTING INDUSTRY LAND PATTERN.





| DOCUMENT NUMBER: | 98AON13591G | Electronic versions are uncontrolled except when accessed directly from the Document Repos Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | | |
|------------------|---------------------|---|-------------|--|--|
| DESCRIPTION: | UQFN8 1.6X1.6, 0.5P | | PAGE 1 OF 1 | | |

ON Semiconductor and a re trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.


US8 CASE 846AN ISSUE O

DATE 31 DEC 2016

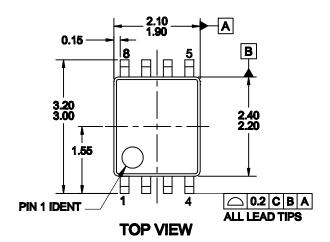




RECOMMENDED LAND PATTERN

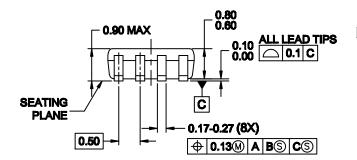


NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-187
- **B. DIMENSIONS ARE IN MILLIMETERS.**
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1994.

SIDE VIEW





| DOCUMENT NUMBER: | 98AON13778G | Electronic versions are uncontrolled except when accessed directly from the Document Repo Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | | |
|------------------|-------------|--|-------------|--|--|
| DESCRIPTION: | US8 | | PAGE 1 OF 1 | | |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMi., and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer p

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative