MBR5100MFS, NRVB5100MFS

SWITCHMODE **Power Rectifiers**

Features

- Low Power Loss / High Efficiency
- New Package Provides Capability of Inspection and Probe After **Board Mounting**
- Guardring for Stress Protection
- Low Forward Voltage Drop
- 175°C Operating Junction Temperature
- NRVB Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These are Pb-Free Devices

Mechanical Characteristics:

- Case: Epoxy, Molded
- Epoxy Meets Flammability Rating UL 94–0 @ 0.125 in.
- Lead Finish: 100% Matte Sn (Tin)
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Device Meets MSL 1 Requirements

MAXIMUM RATINGS

Rating	Symbol	Value	Unit				
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	100	V				
Average Rectified Forward Current (Rated V _R , T _C = 165°C)	I _{F(AV)}	5	A				
Peak Repetitive Forward Current, (Rated V _R , Square Wave, 20 kHz, T _C = 160°C)	I _{FRM}	10	A				
Non-Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I _{FSM}	75	A				
Storage Temperature Range	T _{stg}	-65 to +175	°C				
Operating Junction Temperature	TJ	–55 to +175	°C				
Unclamped Inductive Switching Energy (10 mH Inductor, Non-repetitive)	E _{AS}	75	mJ				
ESD Rating (Human Body Model)		3B					
ESD Rating (Machine Model)		M4					

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.




ON Semiconductor[®]

http://onsemi.com

SCHOTTKY BARRIER RECTIFIERS **5 AMPERES 100 VOLTS**





ΖZ

ORDERING INFORMATION

Device	Package	Shipping†
MBR5100MFST1G	SO-8 FL (Pb-Free)	1500 / Tape & Reel
MBR5100MFST3G	SO-8 FL (Pb-Free)	5000 / Tape & Reel
NRVB5100MFST1G	SO-8 FL (Pb-Free)	1500 / Tape & Reel
NRVB5100MFST3G	SO-8 FL (Pb-Free)	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

MBR5100MFS, NRVB5100MFS

THERMAL CHARACTERISTICS

Characteristic	Symbol	Тур	Мах	Unit
Thermal Resistance, Junction-to-Case, Steady State (Assumes 600 mm ² 1 oz. copper bond pad, on a FR4 board)	$R_{\theta JC}$	-	2.4	°C/W
(Assumes 600 mm ² 1 oz. copper bond pad, on a FR4 board)				

ELECTRICAL CHARACTERISTICS

Instantaneous Forward Voltage (Note 1) ($i_F = 5 \text{ Amps}, T_J = 125^{\circ}\text{C}$) ($i_F = 5 \text{ Amps}, T_J = 25^{\circ}\text{C}$)	۷F	0.64 0.76	0.94 0.98	V
Instantaneous Reverse Current (Note 1) (Rated dc Voltage, $T_J = 125^{\circ}C$) (Rated dc Voltage, $T_J = 25^{\circ}C$)	İR	2 0.003	10 0.01	mA

1. Pulse Test: Pulse Width = 300 μ s, Duty Cycle \leq 2.0%.

MBR5100MFS, NRVB5100MFS

100 100 T_A = 175°C i_F, INSTANTANEOUS FORWARD i_F INSTANTANEOUS FORWARD CURRENT (A) 1 0 $T_A = 175^{\circ}C$ 010 CURRENT (A) $T_A = 125^{\circ}C$ T_A = 125°C T_A = 150°C T_A = 150°C T_A = 25°C T_A = 25°C -40°C -40°C 0.1 0.1 0.1 0.2 0.3 0.4 0.5 0.6 0.7 0.8 0.9 1.0 0.1 0.2 0.3 0.4 0.5 0.6 0.7 0.8 0.9 1.0 0 0 VF, INSTANTANEOUS FORWARD VOLTAGE (V) VF, INSTANTANEOUS FORWARD VOLTAGE (V) Figure 1. Typical Instantaneous Forward Figure 2. Maximum Instantaneous Forward Characteristics Characteristics (v) 1.E+00 1.E-01 1.E-02 3.1.E-03 1.E-03 1.E-04 1.E-05 0.4.5 0. T_A = 175°C T₄ = 175°C ≡ /ERSE $T_A = 125^{\circ}C$ 1.E-03 T_A = 125°C $T_{A} = 150^{\circ}C_{A}$ 띭1.E-04 T_A = 150°C ≣ E S1.E-06 1.E-07 1.E-07 1.E-08 1.E-09 1.E-10 $T_A = 25^{\circ}C$ LE-05 1.E-05 1.E-06 1.E-07 1.E-07 1.E-08 $T_A = 25^{\circ}C$ TA -40°C ≣ = $T_A = -40^{\circ}C$ 10 20 30 40 50 60 70 80 90 100 0 10 20 30 40 50 60 70 80 90 100 0 ŕ ŕ V_R, INSTANTANEOUS REVERSE VOLTAGE (V) V_R, INSTANTANEOUS REVERSE VOLTAGE (V) Figure 3. Typical Reverse Characteristics Figure 4. Maximum Reverse Characteristics I_{F(AV)}, AVERAGE FORWARD CURRENT (A) 1000 10 $T_{.1} = 25^{\circ}C$ C, JUNCTION CAPACITANCE (pF) 9 $R_{\theta JC} = 2.4^{\circ}C/W$ DC 8 7 Square Wave 6 100 5 4 3 2 1 10 0 60 80 60 100 140 160 10 20 30 40 50 70 90 100 80 120 0 V_R, REVERSE VOLTAGE (V) T_C, CASE TEMPERATURE (°C) Figure 5. Typical Junction Capacitance Figure 6. Current Derating TO-220AB

TYPICAL CHARACTERISTICS

MBR5100MFS, NRVB5100MFS

TYPICAL CHARACTERISTICS

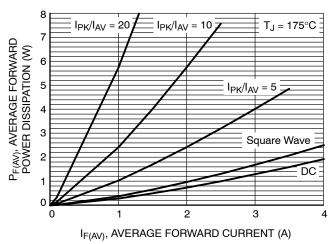


Figure 7. Forward Power Dissipation

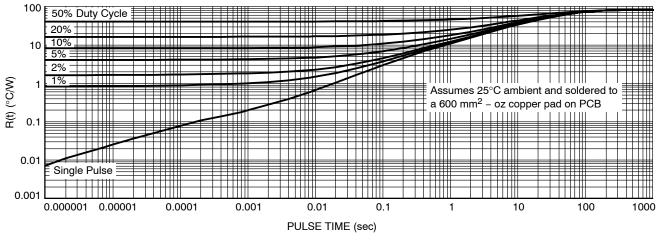


Figure 8. Thermal Characteristics





onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters, including "Typicals" must be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcula performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

TECHNICAL SUPPORT

onsemi Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative