ON Semiconductor

Is Now

Onsemi

To learn more about onsemi[™], please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product factures, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and asfety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or by customer's technical experts. onsemi products and actal performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiari

Single Buffer

NL17SV16

The NL17SV16 is a single buffer in tiny footprint packages. The device is designed to operate for $V_{CC} = 0.9$ V to 3.6 V.

Features

- Designed for 0.9 V to 3.6 V V_{CC} Operation
- 1.4 ns t_{PD} at 3.3 V (Typ)
- Inputs/Outputs Over-Voltage Tolerant up to 3.6 V
- I_{OFF} Supports Partial Power Down Protection
- Source/Sink 24 mA at 3.3 V
- Available in SOT-353, SOT-553, SOT-953, SC-74A and UDFN Packages
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant



Figure 1. Logic Symbol




ON Semiconductor®


www.onsemi.com


		MARKING DIAGRAMS		
A	SC-74A CASE 318BQ	XXX M• 0 •		
	SC-88A (SC-70-5/SOT-353) CASE 419A-02			
100 M	SOT-553, 5 LEAD CASE 463B	XXM• 0		
and the second s	SOT-953 CASE 527AE			
۲	UDFN6, 1.45x1.0, 0.5 CASE 517AQ	P XM ●		
۲	UDFN6, 1x1, 0.35P CASE 517BX	х м о		
	X, XX = Specific Dev M = Date Code* ■ Pb-Free Pac e: Microdot may be in ei	ckage		
(Note: Microdot may be in either location) *This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present.				

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 7 of this data sheet.









PIN ASSIGNMENT

Pin	SC-88A / SOT-553 / SC-74A	SOT-953	UDFN6
1	NC	А	NC
2	А	GND	А
3	GND	NC	GND
4	Y	Y	Y
5	V _{CC}	V _{CC}	NC
6	_	_	V _{CC}

FUNCTION TABLE

A Input	Y Output
L	L
Н	Н

MAXIMUM RATINGS

Symbol	Characteristics		Value	Unit
V _{CC}	DC Supply Voltage		-0.5 to +4.3	V
V _{IN}	DC Input Voltage		-0.5 to +4.3	V
V _{OUT}		gh or Low State) e Mode (Note 1) ode (V _{CC} = 0 V)	$\begin{array}{c} -0.5 \text{ to } V_{CC} + 0.5 \\ -0.5 \text{ to } +4.3 \\ -0.5 \text{ to } +4.3 \end{array}$	V
I _{IK}	DC Input Diode Current	V _{IN} < GND	-50	mA
I _{OK}	DC Output Diode Current	V _{OUT} < GND	-50	mA
I _{OUT}	DC Output Source/Sink Current		±50	mA
I _{CC} or I _{GND}	DC Supply Current per Supply Pin or Ground Pin		±50	mA
T _{STG}	Storage Temperature Range		-65 to +150	°C
ΤL	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
TJ	Junction Temperature Under Bias		+150	°C
θ_{JA}	Thermal Resistance (Note 2)	SC-88A SOT-553 SOT-953 SC-74A UDFN6	377 324 254 320 154	°C/W
PD	Power Dissipation in Still Air	SC-88A SOT-553 SOT-953 SC-74A UDFN6	332 386 491 390 812	mW
MSL	Moisture Sensitivity		Level 1	-
F _R	Flammability Rating Oxyger	n Index: 28 to 34	UL 94 V-0 @ 0.125 in	-
V _{ESD}		nan Body Model ed Device Model	2000 1000	V
I _{Latchup}	Latchup Performance (Note 4)		±100	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

 Applicable to devices with outputs that may be tri-stated.
 Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow per JESD51-7.
 HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued.4. Tested to EIA/JESD78 Class II.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter		Max	Unit
V _{CC}	Positive DC Supply Voltage	0.9	3.6	V
V _{IN}	DC Input Voltage	0	3.6	V
V _{OUT}	DC Output Voltage Active–Mode (High or Tri–State Mod Power–Down Mode (de (Note 1) 0	V _{CC} 3.6 3.6	
T _A	Operating Temperature Range	-55	+125	°C
t _r , t _f	Input Transition Rise and Fall Time	0	20	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

DC ELECTRICAL CHARACTERISTICS

				T	T _A = 25°C			T _A = −55°C to +125°C	
Symbol	Parameter	Condition	V _{CC} (V)	Min	Тур	Max	Min	Max	Unit
VIH	V _{IH} High-Level Input		0.9	-	0.5	-	-	-	V
	Voltage		1.1 to 1.3	0.65 x V _{CC}	-	-	0.65 x V _{CC}	-	
			1.4 to 1.6	$0.65 \times V_{CC}$	-	-	$0.65 \times V_{CC}$	-	
			1.65 to 1.95	$0.65 \times V_{CC}$	-	-	$0.65 \times V_{CC}$	_	
			2.3 to < 2.7	1.6	-	-	1.6	-	
			2.7 to 3.6	2.0	-	-	2.0	-	
VIL	Low-Level Input		0.9	-	0.5	-	-	-	V
	Voltage		1.1 to 1.3	-	-	$0.35 \times V_{CC}$	-	$0.35 \times V_{CC}$	
			1.4 to 1.6	-	-	$0.35 \times V_{CC}$	-	$0.35 \times V_{CC}$	
			1.65 to 1.95	-	-	$0.35 \times V_{CC}$	-	$0.35 \times V_{CC}$	
			2.3 to < 2.7	-	-	0.7	-	0.7	
			2.7 to 3.6	-	-	0.8	-	0.8	
V _{OH}	/ _{OH} High-Level Output	$V_{IN} = V_{IH} \text{ or } V_{IL}$							V
	Voltage	I _{OH} = -100 μA	0.9	-	V _{CC} – 0.1	-	-	-	
			1.1 to 1.3	$V_{CC} - 0.1$	-	-	$V_{CC}-0.1$	-	
			1.4 to 1.6	V _{CC} - 0.1	-	-	V _{CC} - 0.1	_	
			1.65 to 1.95	$V_{CC} - 0.2$	-	-	V _{CC} - 0.2	-	
			2.3 to <2.7	$V_{CC}-0.2$	-	-	$V_{CC}-0.2$	-	
			2.7 to 3.6	$V_{CC} - 0.2$	-	-	$V_{CC} - 0.2$	-	
		$I_{OH} = -2 \text{ mA}$	1.1 to 1.3	$0.75 \times V_{CC}$	-	-	$0.75 \times V_{CC}$	-	
		I _{OH} = -4 mA	1.4 to 1.6	$0.75 \times V_{CC}$	-	-	$0.75 \times V_{CC}$	-	
		I _{OH} = -6 mA	1.65 to 1.95	1.25	-	-	1.25	-	
		2.3 to 2.7	2.0	-	-	2.0	-		
		I _{OH} = -12 mA	2.3 to 2.7	1.8	-	-	1.8	-	
			2.7 to 3.6	2.2	-	-	2.2	-	
		I _{OH} = -18 mA	2.3 to 2.7	1.7	-	-	1.7	-	
			2.7 to 3.6	2.4	-	-	2.4	-	
		I _{OH} = -24 mA	2.7 to 3.6	2.2	-	-	2.2	-	

DC ELECTRICAL CHARACTERISTICS (continued)

				1	A = 25°	С	T _A = -55°C	C to +125°C	
Symbol	Parameter	Condition	V _{CC} (V)	Min	Тур	Max	Min	Max	Unit
V _{OL}	Low-Level Output	$V_{IN} = V_{IH} \text{ or } V_{IL}$							V
	Voltage	I _{OL} = 100 μA	0.9	_	0.1	-	-	-	
			1.1 to 1.3	-	-	0.1	-	0.1	
			1.4 to 1.6	_	-	0.1	-	0.1	
			1.65 to 1.95	_	-	0.2	-	0.2	
			2.3 to < 2.7	_	-	0.2	-	0.2	
			2.7 to 3.6	_	-	0.2	-	0.2	
		I _{OL} = 2 mA	1.1 to 1.3	_	-	0.25 x V _{CC}	-	$0.25 \times V_{CC}$	
		I _{OL} = 4 mA	1.4 to 1.6	_	-	$0.25 \times V_{CC}$	-	$0.25 \times V_{CC}$	
		I _{OL} = 6 mA	1.65 to 1.95	-	-	0.3	-	0.3	
			2.3 to 2.7	_	-	0.3	-	0.3	
		I _{OL} = 12 mA	2.3 to 2.7	_	-	0.4	-	0.4	
			2.7 to 3.6	_	-	0.4	-	0.4	
		I _{OL} = 18 mA	2.3 to 2.7	_	-	0.6	-	0.6	
			2.7 to 3.6	_	-	0.4	-	0.4	
		I _{OL} = 24 mA	2.7 to 3.6	_	-	0.55	-	0.55	
I _{IN}	Input Leakage Current	V_{IN} = 3.6 V or GND	0.9 to 3.6	-	-	±0.1	-	±0.9	μA
I _{OFF}	Power Off Leakage Current	V _{IN} = 3.6 V or V _{OUT} = 3.6 V	0	_	-	1.0	_	5.0	μA
I _{CC}	Quiescent Supply Current	$V_{IN} = V_{CC}$ or GND	0.9 to 3.6	_	-	0.9	-	5.0	μA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


AC ELECTRICAL CHARACTERISTICS

				1	r _A = 25°C)	T _A = -55°C	to +125°C	
Symbol	Parameter	Condition	V _{CC} (V)	Min	Тур	Max	Min	Мах	Unit
t _{PLH} , t _{PHL}	Propagation Delay,	R_L = 1 MΩ, C_L = 15 pF	0.9	-	13.5	-	-	-	ns
	A to Y (Figures 3 and 4)	R_L = 2 k Ω , C_L = 15 pF	1.1 to 1.3	-	5.9	13.0	-	16.9	
			1.4 to 1.6	-	3.2	6.1	-	7.0	
		$R_L = 500 \ \Omega$, $C_L = 30 \ pF$	1.65 to 1.95	-	2.3	5.2	-	6.2	
			2.3 to 2.7	-	1.7	3.7	-	4.4	
			2.7 to 3.6	-	1.4	3.3	-	3.8	

CAPACITIVE CHARACTERISTICS


Symbol	Parameter	Test Condition	Typical (T _A = 25°C)	Unit
C _{IN}	Input Capacitance	V _{CC} = 0 V	2.0	pF
C _{OUT}	Output Capacitance	V _{CC} = 0 V	4.5	pF
C _{PD}	Power Dissipation Capacitance (Note 5)	10 MHz, V_{CC} = 0.9 to 3.6 V, V_{IN} = 0 V or V_{CC}	20	pF


5. C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}$. C_{PD} is used to determine the no–load dynamic power consumption: $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$.



Test	Switch Position
t _{PLH} / t _{PHL}	Open
t _{PLZ} / t _{PZL}	2 x V _{CC}
t _{PHZ} / t _{PZH}	GND

Figure 3. Test Circuit





		V		
V _{CC} , V	V _{mi} , V	t _{PLH} , t _{PHL}	t _{PZL} , t _{PLZ} , t _{PZH} , t _{PHZ}	V _Y , V
0.9	V _{CC} / 2	V _{CC} / 2	V _{CC} / 2	0.1
1.1 to 1.3	V _{CC} / 2	V _{CC} / 2	V _{CC} / 2	0.1
1.4 to 1.6	V _{CC} / 2	V _{CC} / 2	V _{CC} / 2	0.1
1.65 to 1.95	V _{CC} / 2	V _{CC} / 2	V _{CC} / 2	0.15
2.3 to 2.7	V _{CC} / 2	V _{CC} / 2	V _{CC} / 2	0.15
3.0 to 3.6	1.5	1.5	1.5	0.3

Figure	4.	Switching	Waveforms

ORDERING INFORMATION

Device	Package	Marking	Pin 1 Orientation (See below)	Shipping [†]
NL17SV16DFT2G (Contact ON Semiconductor)	SC-88A	TBD	Q4	3000 / Tape & Reel
NL17SV16XV5T2G	SOT-553	UN	Q4	4000 / Tape & Reel
NL17SV16P5T5G (Contact ON Semiconductor)	SOT-953	TBD	Q2	8000 / Tape & Reel
NL17SV16DBVT1G (Contact ON Semiconductor)	SC-74A	TBD	Q4	3000 / Tape & Reel
NL17SV16MU1TCG (Contact ON Semiconductor)	UDFN6, 1.45 x 1.0, 0.5P	TBD	Q4	3000 / Tape & Reel
NL17SV16MU3TCG (Contact ON Semiconductor)	UDFN6, 1.0 x 1.0, 0.35P	TBD	Q4	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

Pin 1 Orientation in Tape and Reel

Direction of Feed

PACKAGE DIMENSIONS

SC-74A CASE 318BQ **ISSUE B**

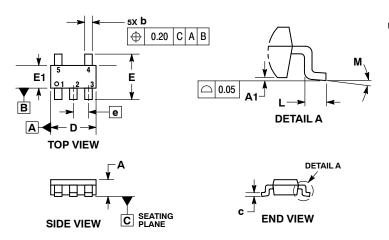


NOTES:

- NOTES:
 DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 CONTROLLING DIMENSION: MILLIMETERS.
 MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
 DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEPT 0.15 PER SIDE EXCEED 0.15 PER SIDE.

	MILLIMETERS		
DIM	MIN	MAX	
Α	0.90	1.10	
A1	0.01	0.10	
b	0.25	0.50	
С	0.10	0.26	
D	2.85	3.15	
Е	2.50	3.00	
E1	1.35	1.65	
е	0.95 BSC		
L	0.20	0.60	
М	0 °	10 °	


RECOMMENDED SOLDERING FOOTPRINT*



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS


SC-88A (SC-70-5/SOT-353) CASE 419A-02 **ISSUE L**

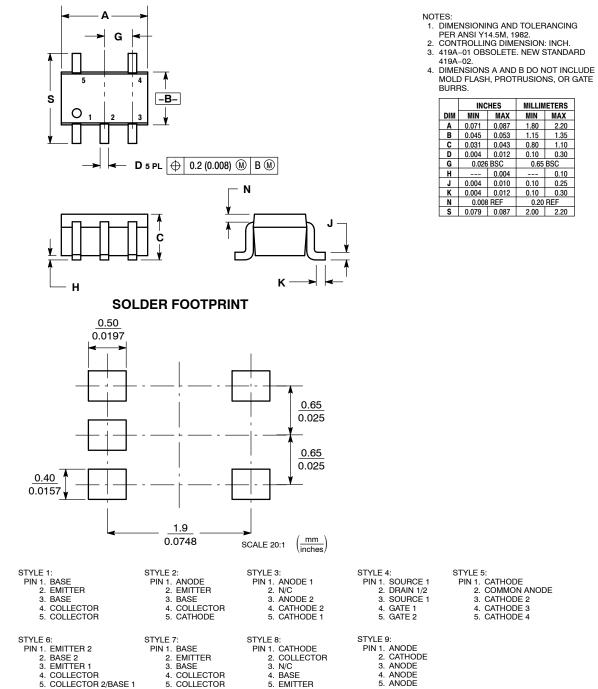


	INCHES		MILLIMETERS		
DIM	MIN	MAX	MIN	MAX	
Α	0.071	0.087	1.80	2.20	
В	0.045	0.053	1.15	1.35	
С	0.031	0.043	0.80	1.10	
D	0.004	0.012	0.10	0.30	
G	0.026 BSC		0.65 BSC		
Н		0.004		0.10	
J	0.004	0.010	0.10	0.25	
К	0.004	0.012	0.10	0.30	
Ν	0.008 REF		0.20 REF		
S	0.079	0.087	2.00	2.20	

PACKAGE DIMENSIONS

SOT-553, 5 LEAD CASE 463B **ISSUE C**



RECOMMENDED SOLDERING FOOTPRINT*



*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

STYLE 1:	STYLE 2:	STYLE 3:	STYLE 4:	STYLE 5:
PIN 1. BASE	PIN 1. CATHODE	PIN 1. ANODE 1	PIN 1. SOURCE 1	PIN 1. ANODE
2. EMITTER	2. COMMON ANODE	2. N/C	2. DRAIN 1/2	2. EMITTER
3. BASE	3. CATHODE 2	3. ANODE 2	3. SOURCE 1	3. BASE
4. COLLECTOR	4. CATHODE 3	4. CATHODE 2	4. GATE 1	4. COLLECTOR
5. COLLECTOR	5. CATHODE 4	5. CATHODE 1	5. GATE 2	5. CATHODE
STYLE 6:	STYLE 7:	STYLE 8:	STYLE 9:	
PIN 1. EMITTER 2	PIN 1. BASE	PIN 1. CATHODE	PIN 1. ANODE	
2. BASE 2	2. EMITTER	2. COLLECTOR	2. CATHODE	
3. EMITTER 1	3. BASE	3. N/C	3. ANODE	
4. COLLECTOR 1	4. COLLECTOR	4. BASE	4. ANODE	
5. COLLECTOR 2/BASE 1	5. COLLECTOR	5. EMITTER	5. ANODE	

NOTES:


1. 2. 3.

DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. CONTROLLING DIMENSION: MILLIMETERS MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

	MILLIMETERS		INCHES			
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	0.50	0.55	0.60	0.020	0.022	0.024
b	0.17	0.22	0.27	0.007	0.009	0.011
С	0.08	0.13	0.18	0.003	0.005	0.007
D	1.55	1.60	1.65	0.061	0.063	0.065
Е	1.15	1.20	1.25	0.045	0.047	0.049
е		0.50 BSC			0.020 BSC)
L	0.10	0.20	0.30	0.004	0.008	0.012
HE	1.55	1.60	1.65	0.061	0.063	0.065

PACKAGE DIMENSIONS

UDFN6, 1.45x1.0, 0.5P CASE 517AQ ISSUE O

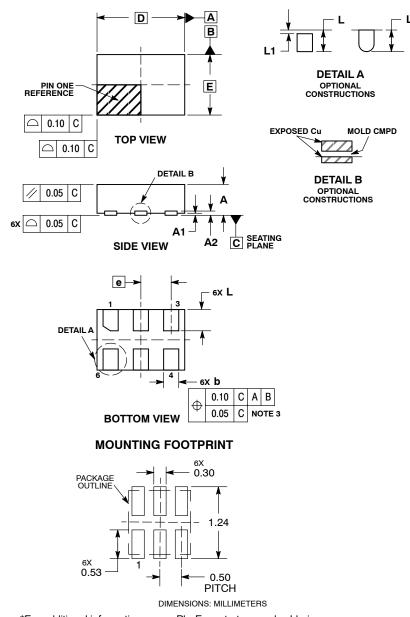


*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


NOTES:
 DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 CONTROLLING DIMENSION: MILLIMETERS.
 DIMENSION & APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm FROM THE TERMINAL TIP.


	MILLIMETERS		
DIM	MIN	MAX	
Α	0.45	0.55	
A1	0.00	0.05	
A2	0.07 REF		
b	0.20	0.30	
D	1.45 BSC		
Е	1.00 BSC		
е	0.50 BSC		
L	0.30	0.40	
L1		0.15	

PACKAGE DIMENSIONS


UDFN6, 1x1, 0.35P CASE 517BX ISSUE O

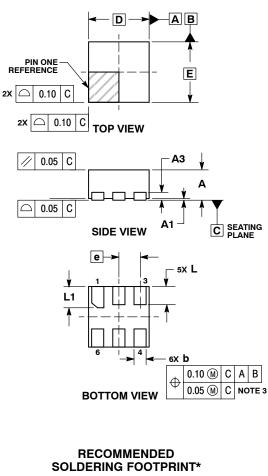






NOTES: 1. DIMENSIONING AND TOLERANCING PER



Bernie / Ine Meteri				
	MILLIMETERS			
DIM	MIN	MAX		
Α	0.45	0.55		
A1	0.00	0.05		
A3	0.13 REF			
b	0.12	0.22		
D	1.00 BSC			
Е	1.00 BSC			
е	0.35 BSC			
L	0.25	0.35		
L1	0.30	0.40		

PACKAGE DIMENSIONS

SOT-953 CASE 527AE ISSUE E



5X L

5X b

⊕ 0.08 X Y

NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- 2. CONTROLLING DIMENSION: MILLIMETERS 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE
- MINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL. 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS		
DIM	MIN	NOM	MAX
Α	0.34	0.37	0.40
b	0.10	0.15	0.20
С	0.07	0.12	0.17
D	0.95	1.00	1.05
E	0.75	0.80	0.85
е	0.35 BSC		
ΗE	0.95	1.00	1.05
L	0.175 REF		
L2	0.05	0.10	0.15
L3			0.15


SOLDERING FOOTPRINT*

BOTTOM VIEW

e

5X L3

5X L2



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and

Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use a a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products harmles, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

TECHNICAL SUPPORT

ON Semiconductor Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada Phone: 011 421 33 790 2910 Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative