Switching Diode, Dual, Common Anode, 70 V

BAW56WT1G, SBAW56WT1G

Features

- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant



ON Semiconductor®

www.onsemi.com



ANODE

MAXIMUM RATINGS (T_A = 25°C)

Rating	Symbol	Max	Unit
Reverse Voltage	V _R	70	V
Forward Current	١ _F	200	mA
Peak Forward Surge Current	I _{FM(surge)}	500	mA
1 1	I _{FSM} s s	4 1 0.5	A

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS (T_A = 25°C)

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board (Note 1) T _A = 25°C	P _D	200	mW
Derate above 25°C		1.6	mW/°C
Thermal Resistance, Junction-to-Ambient	R_{\thetaJA}	625	°C/W
Total Device Dissipation Alumina Substrate (Note 2) $T_A = 25^{\circ}C$	PD	300	mW
Derate above 25°C		2.4	mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	417	°C/W
Junction and Storage Temperature	T _J , T _{stg}	–55 to +150	°C

1. FR–5 = 1.0 \times 0.75 \times 0.062 in.

2. Alumina = 0.4 \times 0.3 \times 0.024 in. 99.5% alumina.



CATHODE

CATHODE

2



A1 = Device Code M = Date Code*

= Pb-Free Package

(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

ORDERING INFORMATION

Device	Package	Shipping [†]
BAW56WT1G	SC–70 (Pb–Free)	3,000 / Tape & Reel
SBAW56WT1G	SC–70 (Pb–Free)	3,000 / Tape & Reel


+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

BAW56WT1G, SBAW56WT1G

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Мах	Unit
OFF CHARACTERISTICS	· · ·			
Reverse Breakdown Voltage $(I_{(BR)} = 100 \ \mu A)$	V _(BR)	70	_	V
Reverse Voltage Leakage Current $(V_R = 25 \text{ V}, \text{ T}_J = 150^{\circ}\text{C})$ $(V_R = 70 \text{ V})$ $(V_R = 70 \text{ V}, \text{ T}_J = 150^{\circ}\text{C})$	IR	- - -	30 2.5 50	μΑ
Diode Capacitance ($V_R = 0, f = 1.0 \text{ MHz}$)	C _D	_	2.0	pF
Forward Voltage $(I_F = 1.0 \text{ mA})$ $(I_F = 10 \text{ mA})$ $(I_F = 50 \text{ mA})$ $(I_F = 150 \text{ mA})$	V _F	- - -	715 855 1000 1250	mV
Reverse Recovery Time (I _F = I _R = 10 mA, R _L = 100 Ω , I _{R(REC)} = 1.0 mA) (Figure 1)	t _{rr}	_	6.0	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

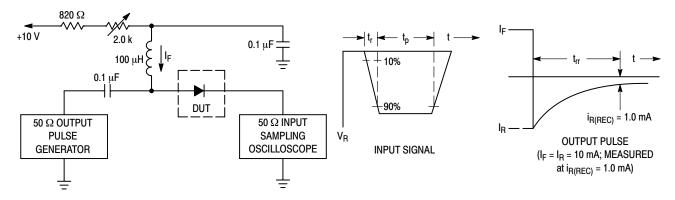




Figure 1. Recovery Time Equivalent Test Circuit

BAW56WT1G, SBAW56WT1G

TYPICAL CHARACTERISTICS

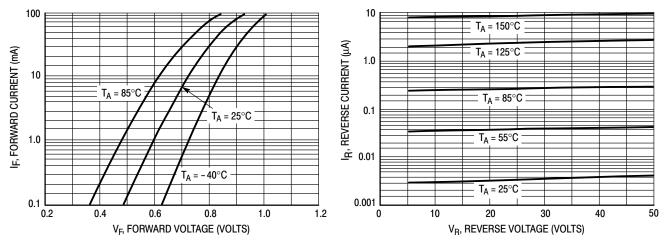


Figure 2. Forward Voltage

Figure 3. Leakage Current





Figure 4. Capacitance

MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS

onsemi

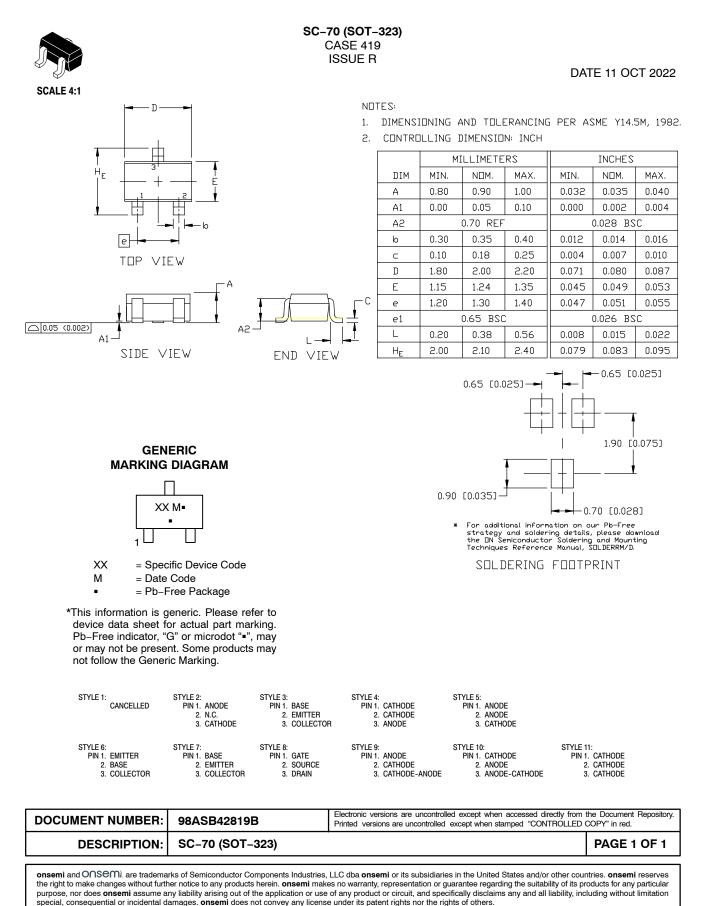

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters, including "Typicals" must be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcula performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

TECHNICAL SUPPORT

onsemi Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative