ISO9001: 2015 ISO14001: 2015

KAN0651-1001B0101-A5742

APPROVAL SPECIFICATIONS

Title. TACT SWITCH

Part NO. KAN0651-1001B0101-A4257

Customer's Part NO.

Model:

Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:

APPROVE	REVIEW	PRPARE
黄自兵	林云龙	林庆杰

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0651-1001B0101 -A4257	TACT SWITCH	А

1、 概述

GENERAL

1.2 适用范围

APPLICATION

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

Operating Temperature Range

- -40℃~85℃(在标准大气压、标准湿度条件下)
- -40 °C ~85 °C (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围

Storage Temperature Range

- -40℃~90℃(在标准大气压、标准湿度条件下)
- -40 $^{\circ}$ C $^{\circ}$ O $^{\circ}$ C (Normal humidity, normal air pressure)
- 1.5 测试条件

Test Conditions

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C ~35°C

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......20℃±2℃

Temperature.......20℃±2℃ 相对湿度.......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa~106Kpa

CUSTOMER	CUSTOMER'S P/N	pGYE'S P/N	PRODUCT	REVISION
		KAN0651-1001B0101 -A4257	TACT SWITCH	A

2、 详细说明

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

Type of actuating: Tactile feedback.

2.4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出);

Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (Max) Ratings: DC 12V, 50mA (Max)

DC 1V, 10µA (Min) Ratings: DC 1V, 10µA (Min)

3. 电气性能:

ELECTRICAL SPECIFICATION

项	目		<u>:</u>	试验条件			要求
ITE	ΞM		TEST CONDITIONS				UIREMENTS
1		接触电阻 act Resistance	在以 5V 10mA 的直流电源或不低于 1KHz 的交流电源的电路中,以一个等于 2 倍按力的静负荷施加于手柄中心 Applying a static load of 2 times operating force to the center of the stem, measurements shall be made by 5V DC 10mA or more than 1KHZ AC small-current contact resistance meter.				≤100mΩ
2	I	绝缘电阻 Insulation Resistance	在端子之间施加 DC 100V /1min 的条件下,测量端子之间底座、盖板的电阻值 Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute.				≥100MΩ
3	介质耐压 Dielectric voltage proof		在端子之间施加 250V AC(50HZ 或 60HZ) /1min 250V AC (50HZ or 60HZ) shall be applied across terminals, for one minute.				击穿、无飞弧 There should be breakdown and flashover
APPROVE	E BY	黄自兵 17.12.2	26 CHECKED BY 林云龙 17.12.26 PRPARE B			Y	林庆杰 17.12.26

С	USTOMER	CUSTOMER'S	S P/N	GYE'	S P/N	Р	RODUCT		REVISION
				KAN0651-	1001B0101 257	TAC	CT SWITCH	1	А
	项目		试 验 条 件			要求			
	ITEM		TEST CONDITIONS					RE	QUIREMENTS
4	触点抖动 Bounce	在导通和断开过 Lightly striking	开关 Switch 10KΩ 示波器 Oscillograph 净通" " 断开"						msec.max 8msec.max
l	械性能: HANICAL SPE	ECIFICATION							
1	按力 Operating Force	量开关导通所需 Placing the swind vertical and the center of the st	开关垂直于操作方向放置,在开关驱动件顶端中心逐渐施力,测量开关导通所需的最大力度。 Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured.					1	60±50gf
2	最大行程 Full Trave	开关垂直于操作方向放置,以一个等于 2 倍按力的静负荷施加在 开关驱动件顶端中心,测量顶端移动的距离。 Placing the switch such that the direction of switch operation is vertical and then applying static load of 2times operating force to the center of the stem; the travel distance for the switch to come to a stop shall be measured.).25±0.1mm	
APP	APPROVE BY 黄自兵 17.12.26 CHECKED BY 林云龙 17.12.26 PRPARE BY 林庆杰 1				林庆杰 17.12.26				

	·	AFFINOVAL	01 2011	10/ (11)	7. ()			
С	USTOMER	CUSTOMER'S P	/N GYE	'S P/N	Р	RODUCT		REVISION
				1001B0101 4257	TAC	CT SWITCH	4	Α
	项目		试验条	件			要求	
	ITEM		TEST CONE	DITIONS			RE	QUIREMENTS
3	回弹力 Return Force	后,测量顶端向自 The sample switc operation is vertic to the whole trave	开关垂直于操作方向放置,在开关驱动件顶端中心下降至全行程后,测量顶端向自由位置转换的力度。 The sample switch is installed such that the direction of switch operation is vertical and upon depressing the stem in its center to the whole travel distance, the force of the stem to return to its free position shall be measured.					20gfMIN
4	停止强度 Stop Strength	荷持续 1min。 Placing the switch vertical, and then	开关垂直于操作方向放置,从操作方向向驱动件施加 30N 的静负荷持续 1min。 Placing the switch such that the direction of switch operation is vertical, and then a static load of 30N shall be applied in the direction of stem operation for a period of 1 min.					几械和电气损坏 shall be no sign of e mechanically and electrically.
5	手柄拔出 强度 Stem Strength	的行程范围。 Placing the switch vertical, and then	开关垂直于操作方向放置,反方向实施最大操作力,并测量手柄的行程范围。 Placing the switch such that the direction of switch operation is vertical, and then the maximum force to withstand a pull applied opposite to the direction of stem operation shall be measured.					20N.min.
6	可焊性 Solderability	在以下设定条件下进行测量: Measurements shall be made following the test set forth below: (1) 焊接温度:245±5℃ Solder temperature: 245±5℃ (2) 浸入时间:3s±0.5s Immersion time: 3s±0.5s					90%以J Except	for the edge, the should cover a
APP	ROVE BY	黄自兵 17.12.26	CHECKED BY	林云龙 17	.12.26	PRPAR	RE BY	林庆杰 17.12.26

С	USTOMER		CUSTOMER	'S P/N	GYE'	S P/N	PF	RODUCT		REVISION
				KAN0651-1001B0101 -A4257 TACT SWITCH		T SWITCH		А		
	项目				试 验	条件				要求
	ITEM				TEST CON	IDITIONS			RE	QUIREMENTS
	5、极限电气性能: ENVIRONMENTAL SPECIFICATION									
1	低温测试 Resistance low tempera	to ature	标准湿度的 Following t normal ten measureme (1) 温度 Tem (2) 时间	Temperature : -40±2°C						阻:≤100mΩ et resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3
2	高温测试 Heat resista	ance	标准湿度的 forth below humidity co (1) 温原 tem (2) 时间	temperature:90±2°C						阻:≤100mΩ tresistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3
3	温度周期性 Change temperat	of	样品应放在 试期间样品 After 5 cyc allowed to conditions	常温及 应保持 cles of stand for 1 h.	要求进行 5 次循环的温度周期性测试, 实验后 A 及标准湿度的环境中 1 小时后做性能测试。测					阻: ≤100mΩ et resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3
APP	APPROVE BY 黄自兵 17.12.26			СНІ	CHECKED BY 林云龙 17.12.26 P			PRPAR	E BY	林庆杰 17.12.26

С	USTOMER	CUSTOMER	'S P/N	GYE'S P/N		PRODUCT		REVISION
				KAN0651-1001B01 -A4257	01	TACT SWITCH	4	А
	项目		试验条件					要求
	ITEM		TEST CONDITIONS					EQUIREMENTS
4	湿温测记 Moisture resistand	标准湿度的 forth below humidity co (1) 温度 tempse (2) 相双 relat (3) 时间	temperature: 60±2℃ 2) 相对湿度: 90%~95% relative humidity:90% to 95%					赴阻:≤200mΩ act resistance: mΩ 3,4.1,4.2,4.3 3,4.1,4.2,4.3
5	硫化试验 Sulfuratio resistand	标准湿度的 forth below humidity co (1) H2S ce (2) 时间 Time (3) 温度	H ₂ S gas concentration: 3ppm±1ppm (2) 时间: 72h Time: 72h					赴阻: ≤1Ω act resistance: ≤1Ω 3,4.1,4.2,4.3 3,4.1,4.2,4.3
6	盐雾试验 Salt Mis	The switch (1)温度: temp (2)盐溶剂 salt s tt (3)时间: Time: 实验后的盐	以下设定条件下进行测量: ne switch shall be checked after following test: 1) 温度: 35℃±2℃ temperature: 35℃±2℃ 2) 盐溶液浓度: 5±1%(质量百分比) salt solution: 5±1%(solids by mass) 3) 时间: 96h±1h Time:96h±1 hour 验后的盐沉积物后水冲掉 iter test, salt deposit shall be removed by running water.				corros	牛上没有腐蚀斑点 No remarkable sion shall be nized in metal part.
APP	ROVE BY	黄自兵 17.12.26	CHE	CKED BY 林云龙	17.1	2.26 PRPAR	E BY	林庆杰 17.12.26

С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT		REVISION	
			KAN0651-1001B0101 -A4257	TACT SWITCH		Α	
	限机械性能 <mark>:</mark> NDURANCE SF	PECIFICATION					
	项目		试验条件			要求	
	ITEM		TEST CONDITIONS		RE	QUIREMENTS	
1	工作寿命 Operation life	(1) DC 12V, 50 DC 12V, 50 r (2) 按动速率: 1-Rate of ope (3) 按力: 按力: Operating Forc (4) 平均无故障	be made following the te mA 带负载 mA resistive load 次/秒 ration: 1 times/s	接触电阻≤1ΩContact resistance≤1Ω 触点弹力≤10ms Contact bounce≤10ms 按力:初值的±30% Operating Force: initial value±30% 项目3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3			
2	振动 Vibration	Measurement shall (1) 振动频率范 Vibration fi (2) 振幅(峰一 Amplitude: (3) 振动方向: Direction (direction in (4) 测试时间:	Vibration frequency range: 10 to 55 to 10Hz (2) 振幅(峰一峰): 1.5mm Amplitude: 1.5mm (3) 振动方向: 包括手柄行程方向在内的三个相互垂直的方向 Direction of vibration:Three mutually perpendicular direction including the direction of stem travel				
	接条件: ERING CONDIT	ΓΙΟΝS:					
请按以下条件进行焊接: (1) 焊锡温度: ≤350℃ (2) 连续焊接时间: ≤3 s Please practice according to below conditions: (1) Soldering temperature: 350℃ Max. (2) Continuous soldering time: 3 s Max.							
APP	ROVE BY 貞	连自兵 17.12.26 CHE	CKED BY 林云龙 17.	.12.26 PRPARI	E BY	林庆杰 17.12.26	

CI	CUSTOMER CUSTOMER'S P/N GY		E'S P/N	PRODUCT	REVISION			
			1-1001B0101 A4257	TACT SWITCH	А			
	项目 Items				条件 Condition			
	助焊剂附着量 Flux built-up				不附着于零部件贴装面的程度 Mounting surface should not be coated with flax			
	自动浸焊	预热温度 Preheating temper	rature	印刷电路板焊接面的周围温度 100℃ max. Ambient temperature of the soldered surface of PC board. 100℃ max.				
7.2	Conditions fo	预热温度时间 Preheating tim	ne		60s max.			
	Auto-dip	焊接温度 Soldering tem	perature	260℃ max.				
焊接浸渍时间 Continuous dipping time 5s max.								
		焊接次数		最多两次				
	마 사 소나 다니	Number of sold	ering		2times max.			

焊接说明:

1、开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent.

1.1 在使用烙铁的情况下,焊锡温度应在 350℃以下、3 秒以内。

In the case of using solding iron, solding conditions shall be 350℃ max and 3 sec.max.

1.2 浸焊后,注意不要在顶部施加负荷。

Right after switches were soidered; please be careful not to load to on the knobs of switches.

- 2、设计中应注意的事项(Design instructions)
- 2.1 印刷基板的安装孔尺寸参见产品图。

Follow recommended P.W.B. piercing plan in outside drawing page.

- 3、注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关。

Please be cautions not to give excessive static load or shock to swiches.

3.2 开关浸焊后,印刷基板注意不要叠放。


Please be careful not to pile up P.W.B.after switches were soldered.


3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。


Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially. When you need to preserve for a long period, do not open the carton.


APPROVE BY	黄自兵 17.12.26	CHECKED BY	林云龙 17.12.26	PRPARE BY	林庆杰 17.12.26

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0651-1001B0101 -A4257	TACT SWITCH	А

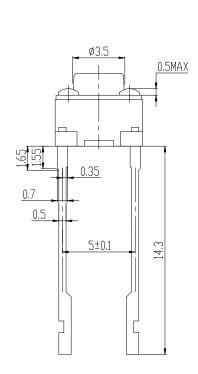

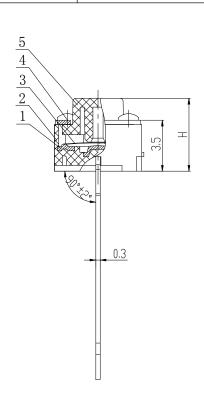





电路图 ○—∽ ○—○

General tolerance: ± 0.2 mm $H=10.0\pm 0.2$ mm

Contra tolerance: 20.2mm 11 10.020.2mm							
	NO.	NAME	MATERIAL	QTY.	FINISHING		
	1	TERMINAL	Brass	1	Sil	Silver plating Black Contact side silver plating Cu Sn plating	
	2	CASE	PA66	1			
	3	CONTACT	SUS	1	Contact s		
	4	COVER	Brass	1	Cu		
	5	STEM	PA66	1	Black		
_		# 4 5 47 40 00	011501755 5	, LL - 1	. 17 10 00	5554555	

 APPROVE BY
 黄自兵 17.12.26
 CHECKED BY
 林云龙 17.12.26
 PRPARE BY
 林庆杰 17.12.26

