


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES



- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(kΩ)	R2(kΩ)
KRC101	4.7	4.7
KRC102	10	10
KRC103	22	22
KRC104	47	47
KRC105	2.2	47
KRC106	4.7	47

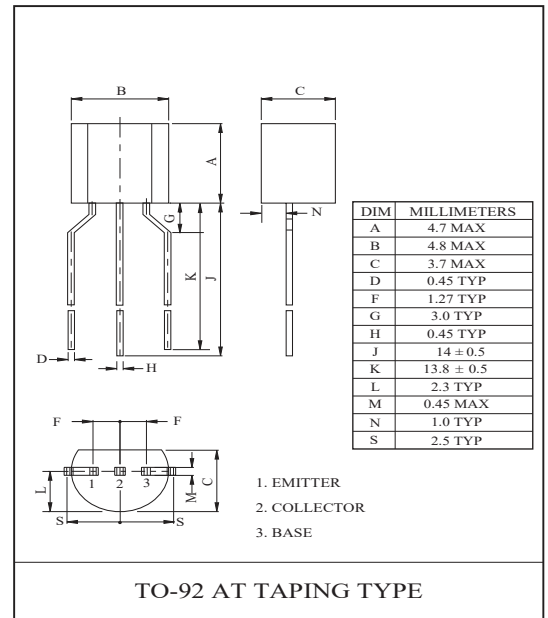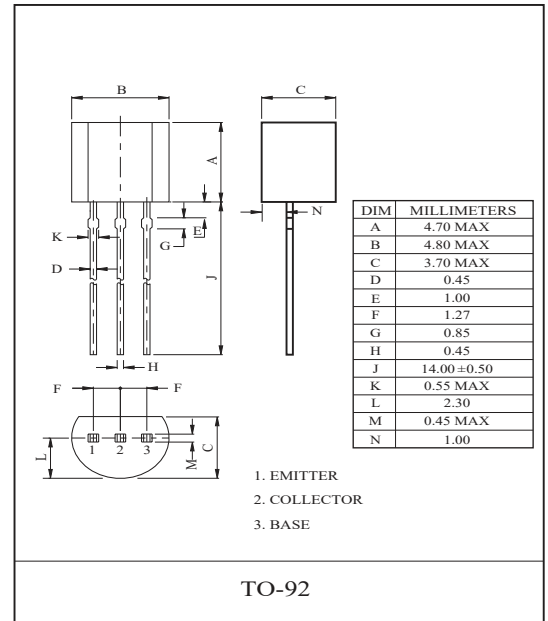

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC101 ~ 106	V_o	50	V
Input Voltage	KRC101	V_i	20, -10	V
	KRC102		30, -10	
	KRC103		40, -10	
	KRC104		40, -10	
	KRC105		12, -5	
	KRC106		20, -5	
Output Current	KRC101 ~ 106	I_o	100	mA
Power Dissipation		P_D	625	mW
Junction Temperature		T_j	-55~150	°C
Storage Temperature Range		T_{stg}	-55 ~ 150	°C

KRC101~KRC106

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC101 ~ 106	$I_{O(OFF)}$	$V_O=50V, V_I=0$	-	-	500	nA
DC Current Gain	KRC101	G_I	$V_O=5V, I_O=10mA$	30	55	-	
	KRC102			50	80	-	
	KRC103			70	120	-	
	KRC104			80	200	-	
	KRC105			80	200	-	
	KRC106			80	200	-	
Output Voltage	KRC101 ~ 106	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	V
Input Voltage (ON)	KRC101	$V_{I(ON)}$	$V_O=0.2V, I_O=5mA$	-	1.5	2.0	V
	KRC102			-	1.8	2.4	
	KRC103			-	2.1	3.0	
	KRC104			-	2.8	5.0	
	KRC105			-	0.8	1.1	
	KRC106			-	0.9	1.3	
Input Voltage (OFF)	KRC101 ~ 104	$V_{I(OFF)}$	$V_O=5V, I_O=0.1mA$	1.0	1.2	-	V
	KRC105 ~ 106			0.5	0.65	-	
Transition Frequency	KRC101 ~ 106	f_T^*	$V_O=10V, I_O=5mA$	-	200	-	MHz
Input Current	KRC101	I_I	$V_I=5V$	-	-	1.8	mA
	KRC102			-	-	0.88	
	KRC103			-	-	0.36	
	KRC104			-	-	0.18	
	KRC105			-	-	3.6	
	KRC106			-	-	1.8	
Input Resistor	KRC101	R1	-	3.29	4.7	6.11	kΩ
	KRC102			7	10	13	
	KRC103			15.4	22	28.6	
	KRC104			32.9	47	61.1	
	KRC105			1.54	2.2	2.86	
	KRC106			3.29	4.7	6.11	
Input Resistor	KRC101	R2	-	3.29	4.7	6.11	kΩ
	KRC102			7	10	13	
	KRC103			15.4	22	28.6	
	KRC104			32.9	47	61.1	
	KRC105			32.9	47	61.1	
	KRC106			32.9	47	61.1	







Note : * Characteristic of Transistor Only.

KRC101~KRC106







ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRC101	V _O =5V V _{IN} =5V R _L =1kΩ	-	0.03	-	μS
		KRC102		-	0.05	-	
		KRC103		-	0.12	-	
		KRC104		-	0.22	-	
		KRC105		-	0.01	-	
		KRC106		-	0.03	-	
	Storage Time	KRC101		-	2.0	-	
		KRC102		-	2.0	-	
		KRC103		-	2.0	-	
		KRC104		-	2.0	-	
		KRC105		-	2.0	-	
		KRC106		-	2.0	-	
	Fall Time	KRC101		-	0.12	-	
		KRC102		-	0.36	-	
		KRC103		-	0.35	-	
		KRC104		-	0.6	-	
		KRC105		-	0.1	-	
		KRC106		-	0.19	-	

KRC101~KRC106

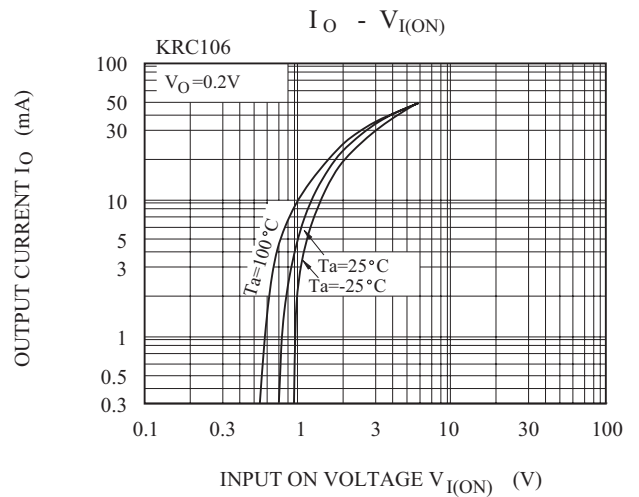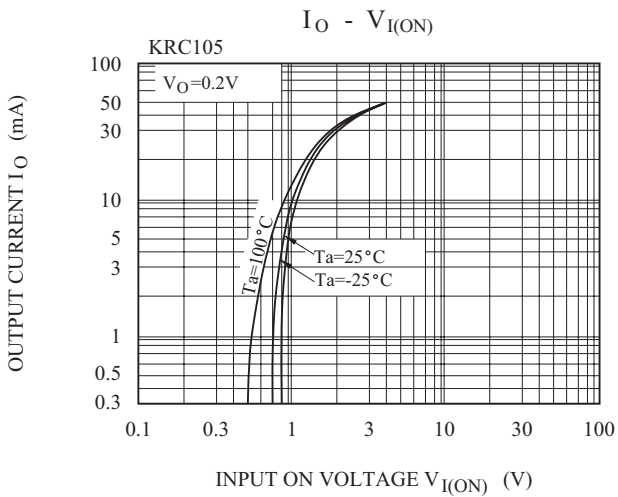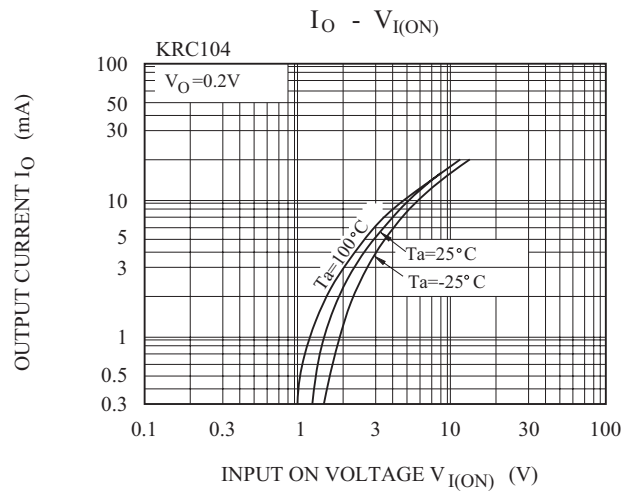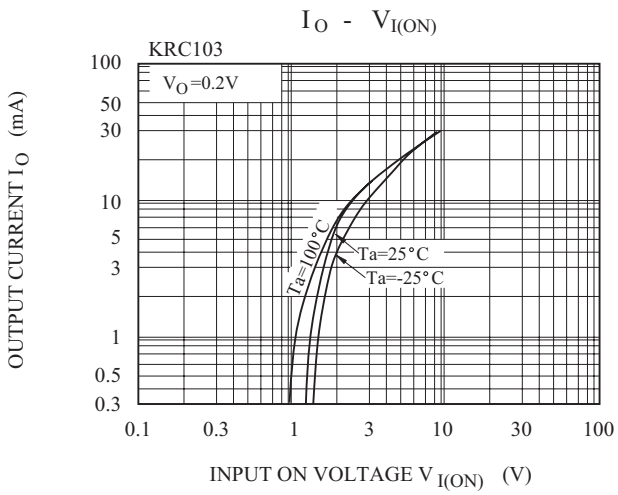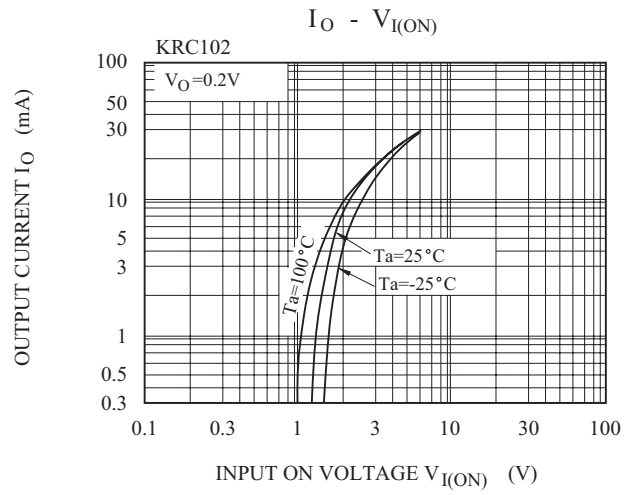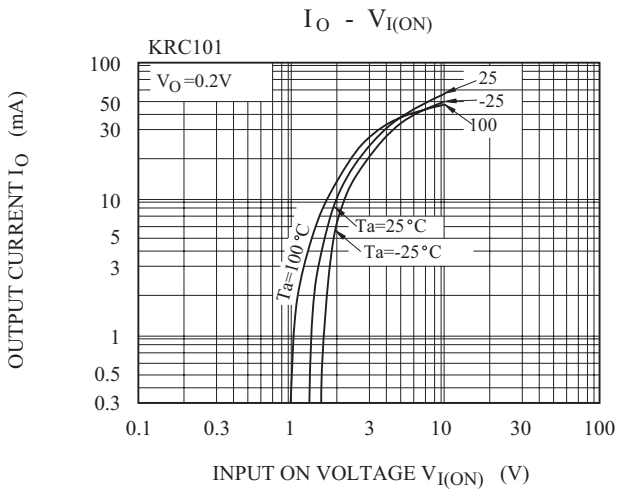

KRC101~KRC106

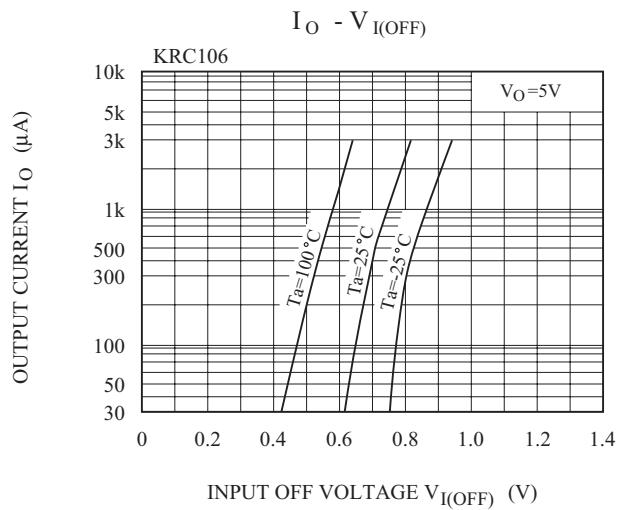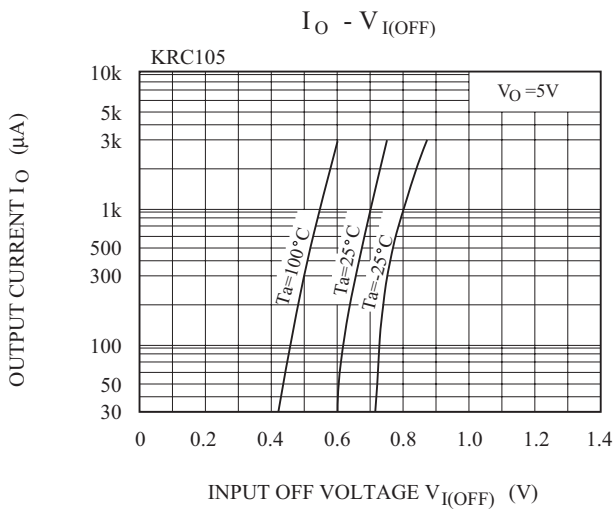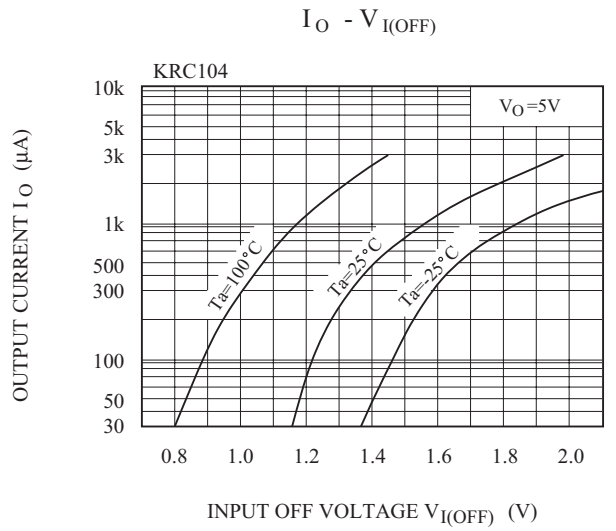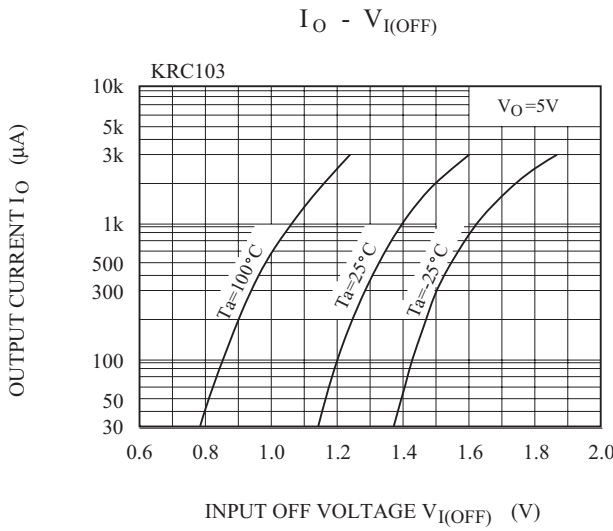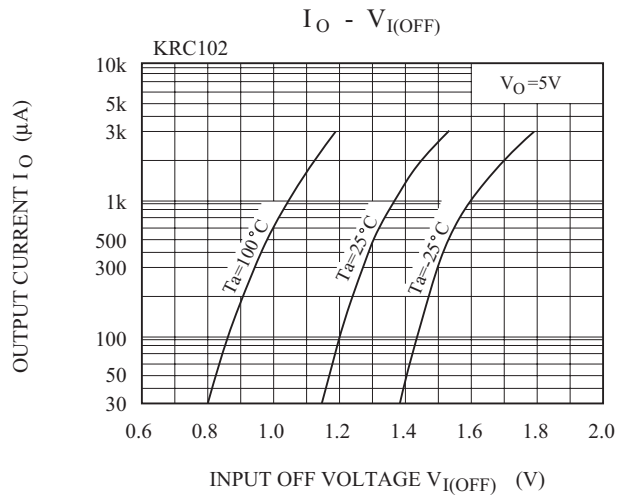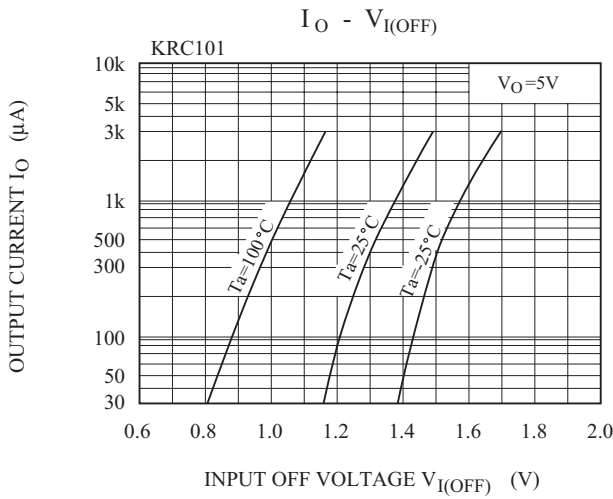

KRC101~KRC106

