

### GENERAL DESCRIPTION

The 74LVC1G32Q is a single 2-input OR function gate that is designed for 1.65V to 5.5V  $V_{CC}$  operation. The inputs from 3.3V or 5V device make this device to operate as a translator in a mixed 3.3V and 5V system environment. All of the inputs support Schmitt trigger action, allowing slower input rise and fall time for the device.


For partial power-down applications using  $I_{OFF}$ , this device is extremely suitable. When the device is powered down, the damaging current backflow will be prevented from passing through the device.

This device is AEC-Q100 qualified (Automotive Electronics Council Standard Q100 Grade 1) and the use of this device is suitable for automotive applications.

### FEATURES

- **AEC-Q100 (Grade 1) Qualified for Automotive Applications**  
 $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- **Wide Supply Voltage Range: 1.65V to 5.5V**
- **Inputs Accept Voltages up to 5.5V**
- **+24mA/-24mA Output Current at  $V_{CC} = 3.0\text{V}$**
- **CMOS Low Power Consumption**
- **High Noise Immunity**
- **Direct Interface with TTL Levels**
- **Complies with JEDEC Standards:**
  - ◆ JESD8-7 (1.65V to 1.95V)
  - ◆ JESD8-5 (2.3V to 2.7V)
  - ◆ JESD8-B/JESD36 (2.7V to 3.6V)
- **Latch-up Performance Exceeds 250mA**
- **$-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  Operating Temperature Range**
- **Available in a Green SC70-5 Package**

### LOGIC SYMBOL

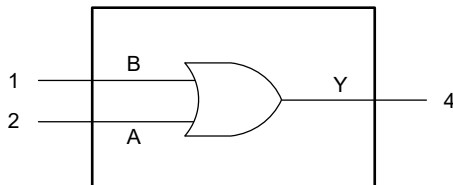


### FUNCTION TABLE


INPUTS		OUTPUT
A	B	Y
L	L	L
L	H	H
H	L	H
H	H	H

H = High Voltage Level  
L = Low Voltage Level

### LOGIC DIAGRAM

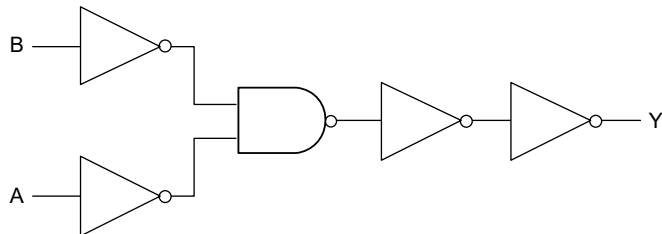

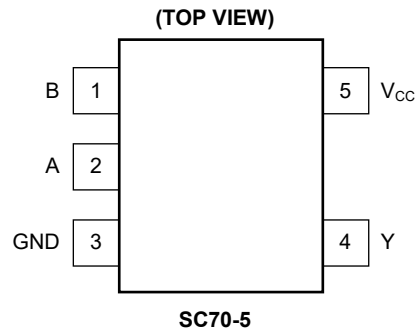

**PIN CONFIGURATION****PIN DESCRIPTION**

PIN	NAME	FUNCTION
1	B	Data Input.
2	A	Data Input.
3	GND	Ground.
4	Y	Data Output.
5	V <sub>CC</sub>	Supply Voltage.

**ELECTRICAL CHARACTERISTICS**(Full = -40°C to +125°C, all typical values are measured at  $V_{CC} = 3.3V$  and  $T_A = +25^\circ C$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
High-Level Input Voltage	$V_{IH}$	$V_{CC} = 1.65V$ to $1.95V$	Full	$0.65 \times V_{CC}$			V
		$V_{CC} = 2.3V$ to $2.7V$	Full	1.7			
		$V_{CC} = 2.7V$ to $3.6V$	Full	2.0			
		$V_{CC} = 4.5V$ to $5.5V$	Full	$0.7 \times V_{CC}$			
Low-Level Input Voltage	$V_{IL}$	$V_{CC} = 1.65V$ to $1.95V$	Full			$0.35 \times V_{CC}$	V
		$V_{CC} = 2.3V$ to $2.7V$	Full			0.7	
		$V_{CC} = 2.7V$ to $3.6V$	Full			0.8	
		$V_{CC} = 4.5V$ to $5.5V$	Full			$0.3 \times V_{CC}$	
High-Level Output Voltage	$V_{OH}$	$V_I = V_{IH}$ or $V_{IL}$	$I_O = -100\mu A$ , $V_{CC} = 1.65V$ to $5.5V$	Full	$V_{CC} - 0.05$		V
			$I_O = -4mA$ , $V_{CC} = 1.65V$	Full	1.4		
			$I_O = -8mA$ , $V_{CC} = 2.3V$	Full	2.0		
			$I_O = -12mA$ , $V_{CC} = 2.7V$	Full	2.3		
			$I_O = -24mA$ , $V_{CC} = 3.0V$	Full	2.5		
			$I_O = -32mA$ , $V_{CC} = 4.5V$	Full	4.0		
Low-Level Output Voltage	$V_{OL}$	$V_I = V_{IH}$ or $V_{IL}$	$I_O = 100\mu A$ , $V_{CC} = 1.65V$ to $5.5V$	Full		0.10	V
			$I_O = 4mA$ , $V_{CC} = 1.65V$	Full		0.30	
			$I_O = 8mA$ , $V_{CC} = 2.3V$	Full		0.30	
			$I_O = 12mA$ , $V_{CC} = 2.7V$	Full		0.35	
			$I_O = 24mA$ , $V_{CC} = 3.0V$	Full		0.55	
			$I_O = 32mA$ , $V_{CC} = 4.5V$	Full		0.55	
Input Leakage Current	$I_I$	$V_I = 5.5V$ or GND, $V_{CC} = 0V$ to $5.5V$	Full		$\pm 0.01$	$\pm 1$	$\mu A$
Power-Off Leakage Current	$I_{OFF}$	$V_{CC} = 0V$ , $V_I$ or $V_O = 5.5V$	Full		$\pm 0.01$	2	$\mu A$
Supply Current	$I_{CC}$	$V_I = 5.5V$ or GND, $I_O = 0A$ , $V_{CC} = 1.65V$ to $5.5V$	Full		0.01	2	$\mu A$
Additional Supply Current	$\Delta I_{CC}$	Per Pin, $V_{CC} = 2.3V$ to $5.5V$ , $V_I = V_{CC} - 0.6V$ , $I_O = 0A$	Full		0.05	5	$\mu A$
Input Capacitance	$C_I$	$V_{CC} = 3.3V$ , $V_I = GND$ to $V_{CC}$	Full		6.5		pF

**DYNAMIC CHARACTERISTICS**

(For test circuit, see Figure 1, for waveforms see Figure 2. All typical values are measured at  $T_A = +25^\circ\text{C}$  and  $V_{CC} = 1.8\text{V}, 2.5\text{V}, 2.7\text{V}, 3.3\text{V}$  and  $5.0\text{V}$  respectively, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN <sup>(1)</sup>	TYP	MAX <sup>(2)</sup>	UNITS	
Propagation Delay <sup>(2)</sup>	$t_{PD}$	A, B to Y, see Figure 2	$V_{CC} = 1.65\text{V to } 1.95\text{V}$	Full	1.0	7.9	13.0	ns
			$V_{CC} = 2.3\text{V to } 2.7\text{V}$	Full	0.5	4.3	7.0	
			$V_{CC} = 2.7\text{V}$	Full	0.5	3.7	7.0	
			$V_{CC} = 3.0\text{V to } 3.6\text{V}$	Full	0.5	3.4	6.0	
			$V_{CC} = 4.5\text{V to } 5.5\text{V}$	Full	0.1	3.7	6.0	
Power Dissipation Capacitance <sup>(3)</sup>	$C_{PD}$	$V_i = \text{GND to } V_{CC}, V_{CC} = 3.3\text{V}$	$+25^\circ\text{C}$		17		pF	

## NOTES:

- Specified by design and characterization; not production tested.
- $t_{PD}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .
- $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$$

where:

$f_i$  = Input frequency in MHz.

$f_o$  = Output frequency in MHz.


$C_L$  = Output load capacitance in pF.

$V_{CC}$  = Supply voltage in Volts.

$N$  = Number of inputs switching.

$\Sigma(C_L \times V_{CC}^2 \times f_o)$  = Sum of outputs.

## TEST CIRCUIT

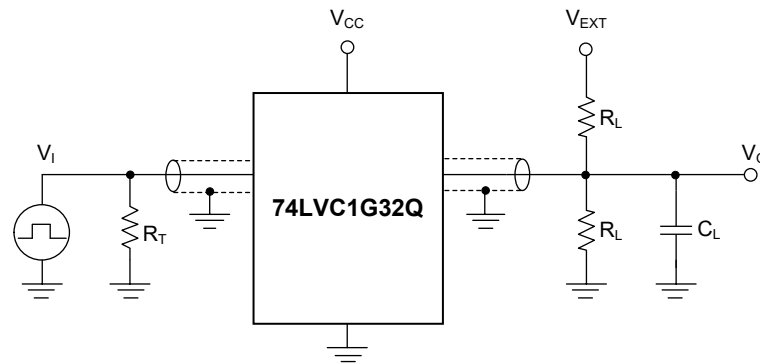

Test conditions are given in Table 1.

Definitions for test circuit:

$R_L$ : Load resistance.

$C_L$ : Load capacitance (includes jig and probe).

$R_T$ : Termination resistance (equals to output impedance  $Z_O$  of the pulse generator).


$V_{EXT}$ : External voltage used to measure switching time.

Figure 1. Test Circuit for Measuring Switching Times

Table 1. Test Conditions

SUPPLY VOLTAGE	INPUT		LOAD		$V_{EXT}$
$V_{CC}$	$V_I$	$t_R = t_F$	$C_L$	$R_L$	$t_{PLH}, t_{PHL}$
1.65V to 1.95V	$V_{CC}$	$\leq 2.0\text{ns}$	30pF	1k $\Omega$	Open
2.3V to 2.7V	$V_{CC}$	$\leq 2.0\text{ns}$	30pF	500 $\Omega$	Open
2.7V	2.7V	$\leq 2.5\text{ns}$	50pF	500 $\Omega$	Open
3.0V to 3.6V	2.7V	$\leq 2.5\text{ns}$	50pF	500 $\Omega$	Open
4.5V to 5.5V	$V_{CC}$	$\leq 2.5\text{ns}$	50pF	500 $\Omega$	Open

## WAVEFORMS

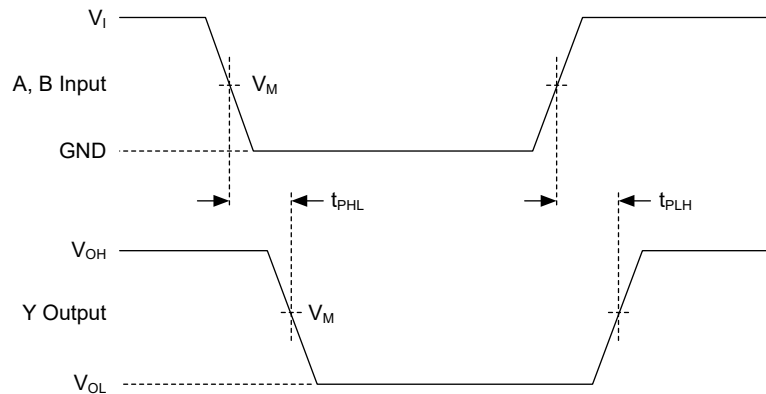

Test conditions are given in Table 1.

Measurement points are given in Table 2.

Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.

**Figure 2. Input A, B to Output Y Propagation Delays**

**Table 2. Measurement Points**

SUPPLY VOLTAGE	INPUT	OUTPUT
$V_{CC}$	$V_M^{(1)}$	$V_M$
1.65V to 1.95V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
2.3V to 2.7V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
2.7V	1.5V	1.5V
3.0V to 3.6V	1.5V	1.5V
4.5V to 5.5V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$

## NOTE:

1. The measurement points should be  $V_{IH}$  or  $V_{IL}$  when the input rising or falling time exceeds 2.5ns.

**REVISION HISTORY**

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



<b>Changes from Original (JUNE 2022) to REV.A</b>	<b>Page</b>
Changed from product preview to production data.....	All

---





PACKAGE OUTLINE DIMENSIONS

SC70-5

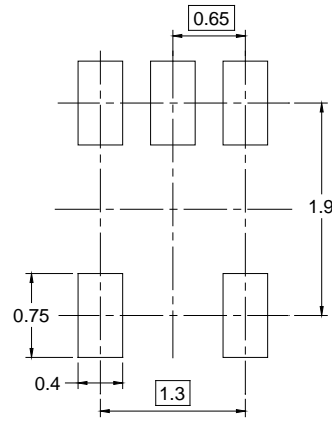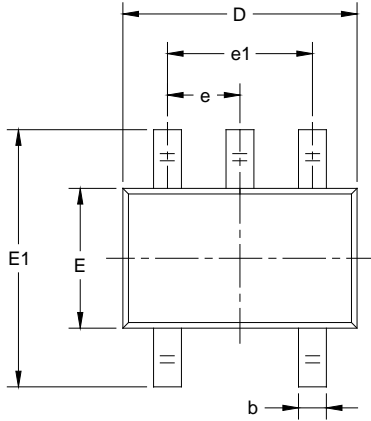

RECOMMENDED LAND PATTERN (Unit: mm)

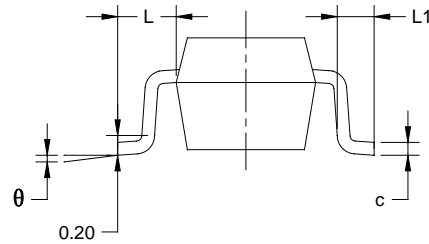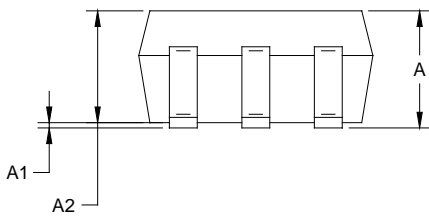

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.800	1.100	0.031	0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	1.000	0.031	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.220	0.003	0.009
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.65 TYP		0.026 TYP	
e1	1.300 BSC		0.051 BSC	
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.

# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS



### TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SC70-5	7"	9.5	2.25	2.55	1.20	4.0	4.0	2.0	8.0	Q3

000001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002