www.ti.com


## SN74LVC841A 10-BIT BUS-INTERFACE D-TYPE LATCH WITH 3-STATE OUTPUTS

SCAS307J-MARCH 1993-REVISED FEBRUARY 2005

#### **FEATURES**

- Operates From 1.65 V to 3.6 V
- Inputs Accept Voltages to 5.5 V
- Max t<sub>pd</sub> of 6.7 ns at 3.3 V
- Typical V<sub>OLP</sub> (Output Ground Bounce)
   <0.8 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Typical V<sub>OHV</sub> (Output V<sub>OH</sub> Undershoot)
   >2 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- I<sub>off</sub> Supports Partial-Power-Down Mode Operation
- Supports Mixed-Mode Signal Operation on All Ports (5-V Input/Output Voltage With 3.3-V V<sub>CC</sub>)
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

# DB, DGV, DW, OR PW PACKAGE (TOP VIEW)



### **DESCRIPTION/ORDERING INFORMATION**

This 10-bit bus-interface D-type latch is designed for 1.65-V to 3.6-V V<sub>CC</sub> operation.

The SN74LVC841A is designed specifically for driving highly capacitive or relatively low-impedance loads. It is particularly suitable for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

The ten latches are transparent D-type latches. The device has noninverting data (D) inputs and provides true data at its outputs.

A buffered output-enable  $(\overline{OE})$  input can be used to place the ten outputs in either a normal logic state (high or low logic levels) or a high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without interface or pullup components.

#### ORDERING INFORMATION

T <sub>A</sub>	PAC	CKAGE <sup>(1)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING	
	SOIC - DW	Tube of 25	SN74LVC841ADW	11/00444	
	SOIC - DW	Reel of 2000	SN74LVC841ADWR	LVC841A	
	SSOP - DB	Reel of 2000	SN74LVC841ADBR	LC841A	
–40°C to 85°C		Tube of 60	SN74LVC841APW		
	TSSOP - PW	Reel of 2000	SN74LVC841APWR	LC841A	
		Reel of 250	SN74LVC841APWT		
	TVSOP - DGV	Reel of 2000	SN74LVC841ADGVR	LC841A	

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SCAS307J-MARCH 1993-REVISED FEBRUARY 2005



## **DESCRIPTION/ORDERING INFORMATION (CONTINUED)**

OE does not affect the internal operations of the latch. Previously stored data can be retained or new data can be entered while the outputs are in the high-impedance state.

Inputs can be driven from either 3.3-V or 5-V devices. This feature allows the use of these devices as translators in a mixed 3.3-V/5-V system environment.


To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

This device is fully specified for partial-power-down applications using I<sub>off</sub>. The I<sub>off</sub> circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

#### **FUNCTION TABLE**

	INPUTS	OUTPUT	
ŌĒ	LE	D	Q
L	Н	Н	Н
L	Н	L	L
L	L	X	$Q_0$
Н	X	Χ	Z

### LOGIC DIAGRAM (POSITIVE LOGIC)

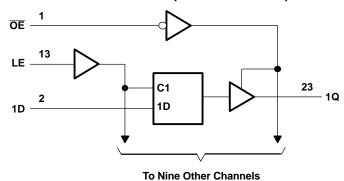



SCAS307J-MARCH 1993-REVISED FEBRUARY 2005

## Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage range		-0.5	6.5	V
$V_{I}$	Input voltage range (2)		-0.5	6.5	V
Vo	Voltage range applied to any output in the high-in	mpedance or power-off state (2)	-0.5	6.5	V
Vo	Voltage range applied to any output in the high of	or low state (2)(3)	-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	put clamp current $V_{O} < 0$			mA
Io	Continuous output current		±50	mA	
	Continuous current through V <sub>CC</sub> or GND			±100	mA
		DB package		63	
0	Dooks as the small impedence (4)	DGV package		86	°C/W
$\theta_{JA}$	Package thermal impedance (4)	DW package		46	-C/VV
		PW package		88	
T <sub>stg</sub>	Storage temperature range		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## Recommended Operating Conditions<sup>(1)</sup>

			MIN	MAX	UNIT	
\/	Supply voltage	Operating	1.65	3.6	V	
V <sub>CC</sub>	Supply voltage	Data retention only	1.5		V	
		V <sub>CC</sub> = 1.65 V to 1.95 V	$0.65 \times V_{CC}$			
$V_{IH}$	High-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.7		V	
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	2			
		V <sub>CC</sub> = 1.65 V to 1.95 V		$0.35 \times V_{CC}$		
$V_{IL}$	Low-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		0.7	V	
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$		0.8		
VI	Input voltage		0	5.5	V	
\/	Output voltage	High or low state	0	V <sub>CC</sub>	V	
Vo	Output voltage	3-state	0	5.5	v	
		V <sub>CC</sub> = 1.65 V		-4		
	High lovel output ourrent	$V_{CC} = 2.3 \text{ V}$		-8	mA	
I <sub>OH</sub>	High-level output current	$V_{CC} = 2.7 \text{ V}$		-12	ША	
		$V_{CC} = 3 V$		-24		
		$V_{CC} = 1.65 \text{ V}$		4		
	Low level output ourrent	$V_{CC} = 2.3 \text{ V}$		8	mA	
I <sub>OL</sub>	Low-level output current	$V_{CC} = 2.7 \text{ V}$		12	ША	
		V <sub>CC</sub> = 3 V		24		
Δt/Δν	Input transition rise or fall rate			10	ns/V	
T <sub>A</sub>	Operating free-air temperature		-40	85	°C	

All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

<sup>(2)</sup> The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(3)</sup> The value of  $V_{CC}$  is provided in the recommended operating conditions table.

<sup>(4)</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

## SN74LVC841A 10-BIT BUS-INTERFACE D-TYPE LATCH WITH 3-STATE OUTPUTS

SCAS307J-MARCH 1993-REVISED FEBRUARY 2005



#### **Electrical Characteristics**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CO	ONDITIONS	V <sub>cc</sub>	MIN	TYP <sup>(1)</sup> MAX	UNIT		
	$I_{OH} = -100 \mu A$		1.65 V to 3.6 V	V <sub>CC</sub> - 0.2				
	$I_{OH} = -4 \text{ mA}$		1.65 V	1.2				
V	$I_{OH} = -8 \text{ mA}$		2.3 V	1.7		V		
V <sub>OH</sub>	I <sub>OH</sub> = -12 mA		2.7 V	2.2		V		
	1 <sub>OH</sub> = -12 IIIA		3 V	2.4				
	$I_{OH} = -24 \text{ mA}$		3 V	2.2				
	I <sub>OL</sub> = 100 μA		1.65 V to 3.6 V		0.2			
	I <sub>OL</sub> = 4 mA		1.65 V		0.45			
V <sub>OL</sub>	I <sub>OL</sub> = 8 mA		2.3 V		0.7	V		
	I <sub>OL</sub> = 12 mA		2.7 V		0.4			
	I <sub>OL</sub> = 24 mA		3 V		0.55			
I <sub>I</sub>	V <sub>I</sub> = 0 to 5.5 V		3.6 V		±5	μΑ		
I <sub>off</sub>	$V_I$ or $V_O = 5.5 \text{ V}$		0		±10	μΑ		
l <sub>OZ</sub>	V <sub>O</sub> = 0 to 5.5 V		3.6 V		±10	μΑ		
	$V_I = V_{CC}$ or GND	1 0	261/		10	^		
I <sub>CC</sub>	$3.6 \text{ V} \le \text{V}_{\text{I}} \le 5.5 \text{ V}^{(2)}$	$I_{O} = 0$	3.6 V		10	μΑ		
$\Delta I_{CC}$	One input at V <sub>CC</sub> – 0.6 V,	Other inputs at V <sub>CC</sub> or GND	2.7 V to 3.6 V		500	μΑ		
C <sub>i</sub>	$V_I = V_{CC}$ or GND		3.3 V		5	pF		
Co	$V_O = V_{CC}$ or GND		3.3 V		7	pF		

<sup>(1)</sup> All typical values are at  $V_{CC}$  = 3.3 V,  $T_A$  = 25°C. (2) This applies in the disabled state only.

### **Timing Requirements**

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

		V <sub>CC</sub> = 1.8 V ± 0.15 V		$V_{CC}$ = 2.5 V $\pm$ 0.2 V		V <sub>CC</sub> = 2.7 V		$V_{CC}$ = 3.3 V $\pm$ 0.3 V		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>w</sub>	Pulse duration	(1)		(1)		3.3		3.3		ns
t <sub>su</sub>	Setup time, data before LE↓	(1)		(1)		2.1		2.1		ns
t <sub>h</sub>	Hold time, data after LE↓	(1)		(1)		1		1		ns

<sup>(1)</sup> This information was not available at the time of publication.

## **Switching Characteristics**

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = ± 0.2	V <sub>CC</sub> = 1.8 V ± 0.2 V		V <sub>CC</sub> = 2.5 V ± 0.2 V		V <sub>CC</sub> = 2.7 V		V <sub>CC</sub> = 3.3 V ± 0.3 V	
	(IIII O1)	(001701)	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
	D	Q	(1)	(1)	(1)	(1)		7.5	2.4	6.7	20
t <sub>pd</sub>	LE		(1)	(1)	(1)	(1)		8.6	2.7	7.6	ns
t <sub>en</sub>	ŌĒ	Q	(1)	(1)	(1)	(1)		8.5	1.3	7.2	ns
t <sub>dis</sub>	ŌĒ	Q	(1)	(1)	(1)	(1)		6.6	1.9	5.9	ns
t <sub>sk(o)</sub>										1	ns

<sup>(1)</sup> This information was not available at the time of publication.





SCAS307J-MARCH 1993-REVISED FEBRUARY 2005

## **Operating Characteristics**


 $T_A = 25^{\circ}C$ 

	PARAMETER		TEST CONDITIONS	V <sub>CC</sub> = 1.8 V TYP	V <sub>CC</sub> = 2.5 V TYP	V <sub>CC</sub> = 3.3 V TYP	UNIT	
_	Power dissipation capacitance	Outputs enabled	f = 10 MHz	(1)	(1)	25	pF	
C <sub>pd</sub>	per latch	Outputs disabled	1 = 10 MHZ	(1)	(1)	6		

<sup>(1)</sup> This information was not available at the time of publication.




#### PARAMETER MEASUREMENT INFORMATION

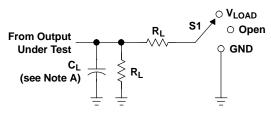

TEST	S1
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	V <sub>LOAD</sub>
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

1	0	Δ	n	CI	R	CI	П	ıT

V	INF	PUTS	.,	.,		_	.,	
V <sub>CC</sub>	VI	t <sub>r</sub> /t <sub>f</sub>	V <sub>M</sub>	V <sub>LOAD</sub>	CL	R <sub>L</sub>	$V_\Delta$	
1.8 V $\pm$ 0.15 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	<b>1 k</b> Ω	0.15 V	
2.5 V $\pm$ 0.2 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	500 Ω	0.15 V	
2.7 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V	
3.3 V $\pm$ 0.3 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V	

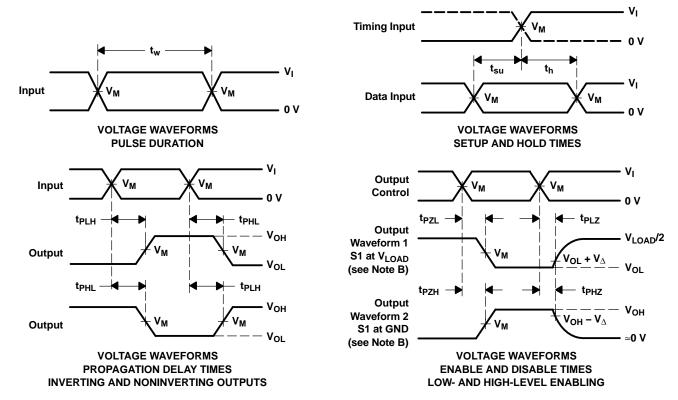

NOTES: A.  $C_L$  includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z<sub>O</sub> = 50 Ω.
- D. The outputs are measured one at a time, with one transition per measurement.
- E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- F. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
- G. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd</sub>.
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms





10-Dec-2020

#### **PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
							(6)				<u> </u>
SN74LVC841ADBR	ACTIVE	SSOP	DB	24	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LC841A	Samples
SN74LVC841ADW	ACTIVE	SOIC	DW	24	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LVC841A	Samples
SN74LVC841APW	ACTIVE	TSSOP	PW	24	60	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LC841A	Samples
SN74LVC841APWR	ACTIVE	TSSOP	PW	24	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	LC841A	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and



## **PACKAGE OPTION ADDENDUM**

10-Dec-2020

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 3-Jun-2022

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LVC841ADBR	SSOP	DB	24	2000	330.0	16.4	8.2	8.8	2.5	12.0	16.0	Q1
SN74LVC841APWR	TSSOP	PW	24	2000	330.0	16.4	6.95	8.3	1.6	8.0	16.0	Q1

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 3-Jun-2022



### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LVC841ADBR	SSOP	DB	24	2000	356.0	356.0	35.0
SN74LVC841APWR	TSSOP	PW	24	2000	356.0	356.0	35.0

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 3-Jun-2022

## **TUBE**



### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
SN74LVC841ADW	DW	SOIC	24	25	506.98	12.7	4826	6.6
SN74LVC841APW	PW	TSSOP	24	60	530	10.2	3600	3.5



SMALL OUTLINE PACKAGE



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



DW (R-PDSO-G24)

## PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters). Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AD.



DW (R-PDSO-G24)

PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Refer to IPC7351 for alternate board design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



## DB (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE

### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

## **IMPORTANT NOTICE AND DISCLAIMER**

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2022, Texas Instruments Incorporated