SCES074E - JUNE 1996 - REVISED JANUARY 1999

- State-of-the-Art Advanced BiCMOS Technology (ABT) *Widebus*[™] Design for 2.5-V and 3.3-V Operation and Low Static Power Dissipation
- Support Mixed-Mode Signal Operation (5-V Input and Output Voltages With 2.3-V to 3.6-V V_{CC})
- Typical V_{OLP} (Output Ground Bounce) < 0.8 V at V_{CC} = 3.3 V, $T_A = 25^{\circ}C$
- Power Off Disables Outputs, Permitting Live Insertion
- High-Impedance State During Power Up and Power Down Prevents Driver Conflict
- Uses Bus Hold on Data Inputs in Place of External Pullup/Pulldown Resistors to Prevent the Bus From Floating
- Output Ports Have Equivalent 30-Ω Series Resistors, So No External Resistors Are Required
- Auto3-State Eliminates Bus Current Loading When Output Exceeds V_{CC} + 0.5 V
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds 2000 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model; and Exceeds 1000 V Using Charged-Device Model, Robotic Method
- Flow-Through Architecture Facilitates Printed Circuit Board Layout
- Distributed V_{CC} and GND Pin Configuration Minimizes High-Speed Switching Noise
- Package Options Include Plastic Shrink Small-Outline (DL), Thin Shrink Small-Outline (DGG), Thin Very Small-Outline (DGV) Packages, and 380-mil Fine-Pitch Ceramic Flat (WD) Package

NOTE: For order entry: The DGG package is abbreviated to G, and the DGV package is abbreviated to V.

description

The 'ALVTH162244 devices are 16-bit buffers/line drivers designed for low-voltage 2.5-V or 3.3-V V_{CC} operation, but with the capability to provide a TTL interface to a 5-V system environment.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus is a trademark of Texas Instruments Incorporated

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



SN54ALVTH162244 WD PACKAGE
SN74ALVTH162244 DGG, DGV, OR DL PACKAGE
(TOP VIEW)

(TOP VIE	EW)	
(10E 1Y1 1Y2 GND 1Y3 1Y4 V _{CC} QND 2Y2 GND 2Y2 QND 2Y3 2Y4 3Y1	1 2 3 4 5 6 7 8 9 10 11 12 13	 48 47 46 45 44 43 42 41 40 39 38 37 36 	20E 1A1 1A2 GND 1A3 1A4 Vcc 2A1 2A2 GND 2A3 2A4 3A1
GND	15	34	GND
3Y3	16	33	3A3
3Y4 [17	32] 3A4
V _{CC} [18	31] V _{CC}
4Y1 [19	30] 4A1
4Y2 [20	29] 4A2
GND [21	28] GND
4Y3	22	27	4A3
4Y4	23	26	4A4
4OE	24	25	3OE

SN54ALVTH162244, SN74ALVTH162244 2.5-V/3.3-V 16-BIT BUFFERS/DRIVERS WITH 3-STATE OUTPUTS SCES074E – JUNE 1996 - REVISED JANUARY 1999

description (continued)

These devices can be used as four 4-bit buffers, two 8-bit buffers, or one 16-bit buffer. These devices provide true outputs and symmetrical active-low output-enable (\overline{OE}) inputs.

Active bus-hold circuitry is provided to hold unused or floating data inputs at a valid logic level.


When V_{CC} is between 0 and 1.2 V, the device is in the high-impedance state during power up or power down. However, to ensure the high-impedance state above 1.2 V, \overline{OE} should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

All outputs are designed to sink up to 12 mA and include equivalent $30-\Omega$ resistors to reduce overshoot and undershoot.

The SN54ALVTH162244 is characterized for operation over the full military temperature range of -55°C to 125°C. The SN74ALVTH162244 is characterized for operation from -40°C to 85°C.

FUNCTION TABLE (each 4-bit buffer)										
INPUTS OUTPUT										
OE	Α	Y								
L	Н	Н								
L	L	L								
Н	Х	Z								

logic diagram (positive logic)

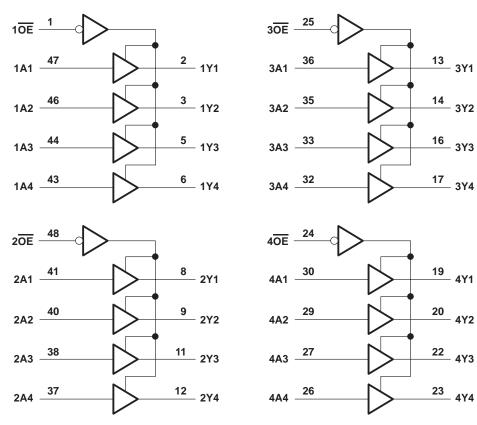



SCES074E - JUNE 1996 - REVISED JANUARY 1999

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V_CC $\ldots \ldots $
Input voltage range, V _I (see Note 1) –0.5 V to 7 V
Voltage range applied to any output in the high-impedance
or power-off state, V _O (see Note 1)
Voltage range applied to any output in the high state, V _O (see Note 1) –0.5 V to 7 V
Output current in the low state, I _O
Output current in the high state, I _O
Input clamp current, I_{IK} (V _I < 0) -50 mA
Output clamp current, I_{OK} (V _O < 0)
Package thermal impedance, θ_{JA} (see Note 2): DGG package
DGV package
DL package
Storage temperature range, T _{stg}

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

2. The package thermal impedance is calculated in accordance with JESD 51.

recommended operating conditions, V_{CC} = 2.5 V \pm 0.2 V (see Note 3)

			SN54A	LVTH16	62244	SN74A	LVTH16	2244	UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	UNIT
Vcc	Supply voltage		2.3		2.7	2.3		2.7	V
VIH	High-level input voltage		1.7		h	1.7			V
VIL	Low-level input voltage			Vin.	0.7			0.7	V
VI	Input voltage		0	Vcc	5.5	0	VCC	5.5	V
ЮН	High-level output current			1	-6			-8	mA
IOL	Low-level output current			22	8			12	mA
$\Delta t/\Delta v$	Input transition rise or fall rate	Outputs enabled	20,	5	10			10	ns/V
Δt/ΔV _{CC}	Power-up ramp rate		200			200			μs/V
ТА	Operating free-air temperature		-55		125	-40		85	°C

NOTE 3: All unused control inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

recommended operating conditions, V_{CC} = 3.3 V \pm 0.3 V (see Note 3)

							LVTH16	62244	UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	UNIT
VCC	Supply voltage		3		3.6	3		3.6	V
VIH	High-level input voltage		2		W.	2			V
VIL	Low-level input voltage			ľu,	0.8			0.8	V
VI	Input voltage		0	Vcc	5.5	0	VCC	5.5	V
ЮН	High-level output current			1	-8			-12	mA
IOL	Low-level output current			22	8			12	mA
$\Delta t/\Delta v$	Input transition rise or fall rate	Outputs enabled		5	10			10	ns/V
Δt/ΔVCC	Power-up ramp rate		200			200			μs/V
TA	Operating free-air temperature		-55		125	-40		85	°C

NOTE 3: All unused control inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



SCES074E – JUNE 1996 - REVISED JANUARY 1999

electrical characteristics over recommended operating free-air temperature range, V_{CC} = 2.5 V \pm 0.2 V (unless otherwise noted)

D.	ARAMETER	TEST CO		SN54A	LVTH1	62244	SN74/	ALVTH16	62244	UNIT
Ρ/	ARAMETER	TEST CO	NDITIONS	MIN	TYP [†]	MAX	MIN TYP [†]		MAX	UNII
VIK		V _{CC} = 2.3 V,	lj = -18 mA			-1.2			-1.2	V
		V _{CC} = 2.3 V to 2.7 V,	I _{OH} = -100 μA	V _{CC} -0.2	2		V _{CC} -0.	.2		
∨он			I _{OH} = -6 mA	1.7						V
		$V_{CC} = 2.3 V$	IOH = -8 mA				1.7			
		V_{CC} = 2.3 V to 2.7 V,	I _{OL} = 100 μA			0.2			0.2	
VOL		V _{CC} = 2.3 V	I _{OL} = 8 mA			0.7				V
		VCC = 2.3 V	I _{OL} = 12 mA						0.7	
	Control	V _{CC} = 2.7 V,	$V_I = V_{CC}$ or GND			±1			±1	
	inputs	$V_{CC} = 0 \text{ or } 2.7 \text{ V},$	VI = 5.5 V			10			10	
lj –		V _I = 5.5 V			10			10	μA	
	Data inputs	V _{CC} = 2.7 V	$V_I = V_{CC}$			3 1			1	
			$V_{I} = 0$			-5			-5	
loff		$V_{CC} = 0,$	V_{I} or V_{O} = 0 to 4.5 V		7				±100	μA
I _{BHL} ‡	ŧ	V _{CC} = 2.3 V,	V _I = 0.7 V		115			115		μA
IBHH		V _{CC} = 2.3 V,	V _I = 1.7 V		5-10			-10		μΑ
BHLO	o¶	V _{CC} = 2.7 V,	$V_I = 0$ to V_{CC}	300	5		300			μA
IBHH	0 [#]	V _{CC} = 2.7 V,	$V_I = 0$ to V_{CC}	-300			-300			μA
IEX		V _{CC} = 2.3 V,	V _O = 5.5 V			125			125	μA
IOZ(F	PU/PD)☆	$V_{CC} \le 1.2 \text{ V}, V_O = 0.5 \text{ V} \text{ to}$ $V_I = \text{GND or } V_{CC}, \overline{\text{OE}} = \text{dot}$	o V _{CC} , on't care			±100			±100	μΑ
IOZH		V _{CC} = 2.7 V	V _O = 2.3 V, V _I = 0.7 V or 1.7 V			5			5	μA
I _{OZL}		V _{CC} = 2.7 V	V _O = 0.5 V, V _I = 0.7 V or 1.7 V			-5			-5	μA
		V _{CC} = 2.7 V,	Outputs high		0.04	0.1		0.04	0.1	
ICC	сс	$I_{O} = 0,$	Outputs low		2.3	4.5		2.3	4.5	mA
		$V_{I} = V_{CC}$ or GND	Outputs disabled		0.04	0.1		0.04	0.1	
Ci		V _{CC} = 2.5 V,	V _I = 2.5 V or 0		3			3		pF
Co		V _{CC} = 2.5 V,	V _O = 2.5 V or 0		6			6		pF

[†] All typical values are at $V_{CC} = 2.5 \text{ V}$, $T_A = 25^{\circ}\text{C}$.

[‡] The bus-hold circuit can sink at least the minimum low sustaining current at V_{IL} max. I_{BHL} should be measured after lowering V_{IN} to GND and then raising it to V_{IL} max.

S The bus-hold circuit can source at least the minimum high sustaining current at VIH min. IBHH should be measured after raising VIN to VCC and then lowering it to VIH min.

 \P An external driver must source at least I_{BHLO} to switch this node from low to high.

An external driver must sink at least IBHHO to switch this node from high to low.

I Current into an output in the high state when $V_{O} > V_{CC}$

*High-impedance state during power up or power down



SCES074E - JUNE 1996 - REVISED JANUARY 1999

electrical characteristics over recommended operating free-air temperature range, V_{CC} = 3.3 V \pm 0.3 V (unless otherwise noted)

DA	RAMETER	TEST O		SN54A	LVTH1	62244	SN74/	ALVTH16	62244	UNIT
FA	RANEIER	TEST CO	ONDITIONS	MIN	TYP [†]	MAX	MIN	TYP [†]	MAX	UNIT
VIK		$V_{CC} = 3 V,$	lı = –18 mA			-1.2		V		
		V _{CC} = 3 V to 3.6 V,	I _{OH} = −100 μA	V _{CC} -0.	2		V _{CC} -0.2			
∨он			I _{OH} = -8 mA	2						V
		V _{CC} = 3 V	I _{OH} = -12 mA				2			
		V _{CC} = 3 V to 3.6 V,	I _{OL} = 100 μA			0.2			0.2	
VOL			IOL = 8 mA			0.8				V
		V _{CC} = 3 V	I _{OL} = 12 mA						0.8	
	Control	V _{CC} = 3.6 V,	$V_I = V_{CC} \text{ or } GND$			±1			±1	
	inputs	V _{CC} = 0 or 3.6 V	Vj = 5.5 V			10			10	
lj –			V _I = 5.5 V			10			10	μA
	Data inputs	V _{CC} = 3.6 V	$V_{I} = V_{CC}$			3 1		1		
			VI = 0		1	5	-5			
l _{off}		$V_{CC} = 0,$	V_{I} or V_{O} = 0 to 4.5 V		2				±100	μA
I _{BHL} ‡		$V_{CC} = 3 V,$	V _I = 0.8 V	75	5		75			μA
I _{BHH} §	3	$V_{CC} = 3 V,$	V _I = 2 V	-75	2		-75			μA
BHLC	P	V _{CC} = 3.6 V,	$V_I = 0$ to V_{CC}	500	5		500			μA
Івнно	D [#]	V _{CC} = 3.6 V,	$V_I = 0$ to V_{CC}	-500			-500			μA
IEX		V _{CC} = 3 V,	V _O = 5.5 V			125			125	μA
IOZ(P	U/PD)☆	$V_{CC} \le 1.2 \text{ V}, \text{ V}_{O} = 0.5 \text{ V}$ VI = GND or V _{CC} , OE = 0	to V _{CC} , don't care			±100			±100	μΑ
I _{OZH}		V _{CC} = 3.6 V	V _O = 3 V, V _I = 0.8 V or 2 V			5			5	μΑ
I _{OZL}		V _{CC} = 3.6 V	V _O = 0.5 V, V _I = 0.8 V or 2 V			-5			-5	μA
	V _{CC} = 3.6 V,		Outputs high		0.07	0.1		0.07	0.1	
ICC	$I_{O} = 0,$	Outputs low		3.2	5		3.2	5	mA	
		$V_I = V_{CC}$ or GND	Outputs disabled		0.07	0.1		0.07	0.1	
$\Delta I_{CC} \square \qquad $			0.4					0.4	mA	
Ci		V _{CC} = 3.3 V,	V _I = 3.3 V or 0		3			3		pF
Co		V _{CC} = 3.3 V,	V _O = 3.3 V or 0		6			6		pF

[†] All typical values are at V_{CC} = 3.3 V, T_A = 25° C.

[‡] The bus-hold circuit can sink at least the minimum low sustaining current at V_{IL} max. I_{BHL} should be measured after lowering V_{IN} to GND and then raising it to V_{IL} max.

§ The bus-hold circuit can source at least the minimum high sustaining current at VIH min. IBHH should be measured after raising VIN to VCC and then lowering it to VIH min.

 \P An external driver must source at least I_{BHLO} to switch this node from low to high.

[#] An external driver must sink at least I_{BHHO} to switch this node from high to low.

I Current into an output in the high state when $V_O > V_{CC}$

*High-impedance state during power up or power down

□ This is the increase in supply current for each input that is at the specified TTL voltage level rather than V_{CC} or GND.



SN54ALVTH162244, SN74ALVTH162244 2.5-V/3.3-V 16-BIT BUFFERS/DRIVERS WITH 3-STATE OUTPUTS SCES074E - JUNE 1996 - REVISED JANUARY 1999

switching characteristics over recommended operating free-air temperature range, C_L = 30 pF, V_{CC} = 2.5 V \pm 0.2 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	SN54ALVTH	1162244	SN74ALVTH	UNIT		
PARAMETER	(INPUT)	(OUTPUT)	MIN	MAX	MIN	MAX		
^t PLH	٨	v	1	4.3	1	4.2	ns	
^t PHL	A		1.4	3.8	1.5	3.7	115	
^t PZH	OE	v	1.3	6.9	1.4	6.8	ns	
^t PZL	UE		1.3	5.2	1.4	5.1	115	
^t PHZ	OE	V	0	4.7	1	4.6	ns	
^t PLZ	UE		\$ 1	3.6	1	3.5	115	

switching characteristics over recommended operating free-air temperature range, CL = 50 pF, V_{CC} = 3.3 V \pm 0.3 V (unless otherwise noted) (see Figure 2)

PARAMETER	FROM	то	SN54ALVTH1	62244	SN74ALVTH	UNIT	
PARAMETER	(INPUT)	(OUTPUT)	MIN	MAX	MIN	MAX	
^t PLH	٨	V	1	3.4	1	3.3	200
^t PHL	А	T	1	3.4	1	3.3	ns
^t PZH	ŌĒ	V	1.4	5	1.5	4.9	20
^t PZL	OE	T	1.3	3.4	1.4	3.3	ns
^t PHZ	ŌĒ	V	1.4	5	1.5	4.9	ns
^t PLZ	UE	I	2 1.4	4.4	1.5	4.3	115



SN54ALVTH162244, SN74ALVTH162244 2.5-V/3.3-V 16-BIT BUFFERS/DRIVERS WITH 3-STATE OUTPUTS SCES074E – JUNE 1996 - REVISED JANUARY 1999


PARAMETER MEASUREMENT INFORMATION $V_{CC} = 2.5 V \pm 0.2 V$ $\odot 2 \times V_{CC}$ **S1** O Open **500** Ω **From Output** TEST **S1** $\wedge \wedge \wedge$ O GND **Under Test** Open tPLH/tPHL $C_L = 30 \text{ pF}$ $2 \times V_{CC}$ ^tPLZ^{/t}PZL **500** Ω (see Note A) GND tPHZ/tPZH LOAD CIRCUIT tw Vcc Vcc Input V_{CC}/2 V_{CC}/2 Timing V_{CC}/2 0 V Input 0 V **VOLTAGE WAVEFORMS** PULSE DURATION t_{su} t_h Vcc Output Data Vcc V_{CC}/2 V_{CC}/2 Control Input V_{CC}/2 V_{CC}/2 (low-level 0 V 0 V enabling) **VOLTAGE WAVEFORMS** SETUP AND HOLD TIMES - tplz tp7I Output Vcc Vcc Waveform 1 V_{CC}/2 V_{CC}/2 S1 at $2 \times V_{CC}$ Input V_{CC}/2 V_{OL} + 0.15 V (see Note B) 0 V Vol ^tPZH ^tPHZ ^tPHL **t**PLH Output – Vон VOH Waveform 2 V_{OH} – 0.15 V V_{CC}/2 Output V_{CC}/2 V_{CC}/2 S1 at GND 0 V VOL (see Note B) **VOLTAGE WAVEFORMS VOLTAGE WAVEFORMS PROPAGATION DELAY TIMES ENABLE AND DISABLE TIMES**

- NOTES: A. CL includes probe and jig capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 - C. All input pulses are supplied by generators having the following characteristics: PRR \leq 10 MHz, Z_O = 50 Ω , t_f \leq 2 ns, t_f \leq 2 ns.
 - D. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms



SCES074E - JUNE 1996 - REVISED JANUARY 1999

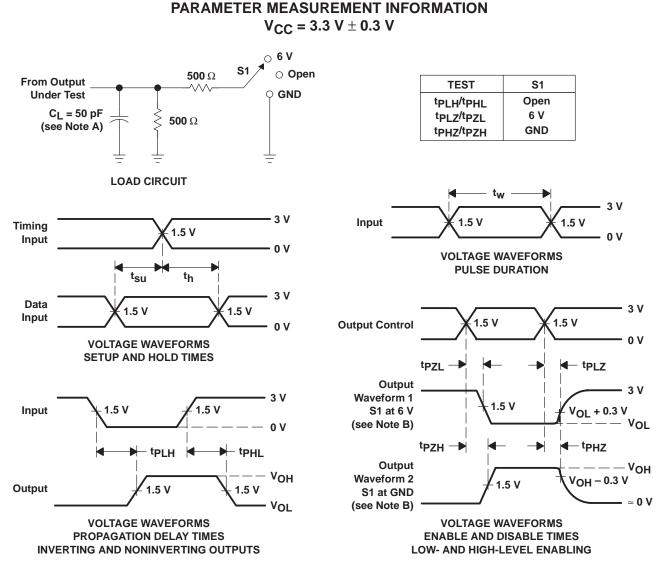

NOTES: A. CL includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform22 is for an output with internal conditions such that the output is high except when disabled by the output control.

C. All input pulses are supplied by generators having the following characteristics: PRR \leq 10 MHz, Z_O = 50 Ω , t_f \leq 2.5 ns, t_f \leq 2.5 ns.

D. The outputs are measured one at a time with one transition per measurement.

Figure 2. Load Circuit and Voltage Waveforms





PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
SN74ALVTH162244DL	ACTIVE	SSOP	DL	48	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVTH162244	Samples
SN74ALVTH162244GR	ACTIVE	TSSOP	DGG	48	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVTH162244	Samples
SN74ALVTH162244LR	ACTIVE	SSOP	DL	48	1000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVTH162244	Samples
SN74ALVTH162244VR	ACTIVE	TVSOP	DGV	48	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VT2244	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and



www.ti.com

10-Dec-2020

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



Texas

STRUMENTS

TAPE AND REEL INFORMATION





QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal												
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ALVTH162244GR	TSSOP	DGG	48	2000	330.0	24.4	8.6	13.0	1.8	12.0	24.0	Q1
SN74ALVTH162244LR	SSOP	DL	48	1000	330.0	32.4	11.35	16.2	3.1	16.0	32.0	Q1
SN74ALVTH162244VR	TVSOP	DGV	48	2000	330.0	16.4	7.1	10.2	1.6	12.0	16.0	Q1



www.ti.com

PACKAGE MATERIALS INFORMATION

3-Jun-2022



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ALVTH162244GR	TSSOP	DGG	48	2000	367.0	367.0	45.0
SN74ALVTH162244LR	SSOP	DL	48	1000	367.0	367.0	55.0
SN74ALVTH162244VR	TVSOP	DGV	48	2000	356.0	356.0	35.0

TEXAS INSTRUMENTS

www.ti.com

3-Jun-2022

TUBE



- B - Alignment groove width

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	Τ (μm)	B (mm)
SN74ALVTH162244DL	DL	SSOP	48	25	473.7	14.24	5110	7.87

DL (R-PDSO-G48)

PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MO-118

PowerPAD is a trademark of Texas Instruments.



MECHANICAL DATA

PLASTIC SMALL-OUTLINE

MPDS006C - FEBRUARY 1996 - REVISED AUGUST 2000

DGV (R-PDSO-G**)

24 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.
- D. Falls within JEDEC: 24/48 Pins MO-153

14/16/20/56 Pins – MO-194



PACKAGE OUTLINE

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 This drawing is subject to change without notice.
 This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not

- exceed 0.15 mm per side. 4. Reference JEDEC registration MO-153.



DGG0048A

DGG0048A

EXAMPLE BOARD LAYOUT

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.

6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



DGG0048A

EXAMPLE STENCIL DESIGN

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate

design recommendations. 8. Board assembly site may have different recommendations for stencil design.



MECHANICAL DATA

MTSS003D - JANUARY 1995 - REVISED JANUARY 1998

DGG (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

48 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold protrusion not to exceed 0,15.
- D. Falls within JEDEC MO-153



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2022, Texas Instruments Incorporated