ISO9001: 2000 ISO14001: 2004

## APPROVAL SPECIFICATIONS

Title. TACT SWITCH

Product Model. KAN0611

Customer's Part NO.

Customer's Model:

# WENZHOU GANGYUAN CO.,LTD

## Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:

APPROVE	REVIEW	POLT
孙自波	张 华	金成尧

WENZHOU GANGYUAN ELECTRONICS CO., LTD.



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0611	TACT SWITCH	А

#### A. Specification & meanings

The name of the tact switch is composed by type and specification, the particular meaning of the type, specification and code is as follows.

KAN0611 — □□□	
	Press force (refer to chart 3) Stem color (refer to chart 2)
	Product height (refer to chart 1)

1. Product height: It is denoted by three figures; For examples, "075" expresses the product which the total height is 7.5mm, as chart 1 shows:

			V /// I//III (	/_\\	
Code	Product height(mm)	Code	Product height(mm)	Code	Product height(mm)
043	4.3	080	8	135	13.5
045	4.5	085	8.5	150	15
050	5	090	9	153	15.3
055	5.5	095	9.5	170	17
060	6	100	10	180	18
065	6.5	110	11	190	19
070	7	115	11.5	200	20
073	7.3(Joint stem)	120	12	210	21
073	7.3	125	12.5		
075	7.5	130	13		

2. Stem color: It is expressed by a figure, as chart 2 shows:

				, ,	, ,				
Color	Black	Red	White	Blue	Yellow	Green	Gray	FrenchGray	Red brown
Code	1	2	3	4	5	6	7	8	9

3. Operating force: An English letter expresses it, unite: Newton (N),as chart 3 shows:

force	Operating	Drago force(N)	Datum faras
force Code	Spec	Press force(N)	Return force
Α	1.0	1.0±0.3	0.2min
В	1.6	1.6±0.5	0.4min
С	2.6	2.6±0.5	0.6min
D	1.3	1.4±0.4	0.2min
E	2.0	2.0±0.5	0.4min
F	0.7	0.7±0.3	0.1min
J	3.0	3.0±0.6	0.6min
K	5.0	5.0±1.0	1.0min

Examples: "KAN0611-0501B" denotes the tact switch with  $6\times6$  base, the height is 5mm,the stem is black , the operating force is 1.6N.

	<b>→1.7.31.45.5</b>		<b>71.</b> //		A D = 1000
APPROVE BY	孙自波 12.05.21	CHECKED BY	张 华 12.05.21	PRPARE BY	金成尧 12.05.21



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0611	TACT SWITCH	А

#### 1、 概述

#### **GENERAL**

1.2 适用范围

#### **APPLICATION**

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

#### **Operating Temperature Range**

- -20℃~70℃(在标准大气压、标准湿度条件下)
- $-20^{\circ}$ C  $\sim$ 70°C (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围

#### Storage Temperature Range

- -30℃~80℃(在标准大气压、标准湿度条件下)
- -30°C ~80°C (Normal humidity, normal air pressure)
- 1.5 测试条件

#### **Test Conditions**

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

Normal temperature......5℃~35℃

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......**20℃±2℃** 

Temperature.......20℃±2℃ 相对湿度.......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa~106Kpa

APPROVE BY	孙自波 12.05.21	CHECKED BY	张 华 12.05.21	PRPARE BY	金成尧 12.05.21
------------	--------------	------------	--------------	-----------	--------------



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0611	TACT SWITCH	А

详细说明

**Detailed specification** 

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

2.4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出) Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)

3. 电气性能:

**ELECTRICAL SPECIFICATION** 

项目				试 验 条 件			要求
	= EM			以並来 IT EST CONDITIONS		REO	安水 UIREMENTS
1	在以 5V 10mA 的直流电的电路中,以一个等于 2 倍接Applying a static load of the center of the stem, meast 5V DC 10mA or more the contact resistance meter.				加于手柄中心 rating force to all be made by		≤100mΩ
2	ı	绝缘电阻 Insulation Resistance	在端子之间施加 DC 100V /1min 的条件下,测量端子之间底座、盖板的电阻值  Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute.				≥100MΩ
介质耐压 3 Dielectric voltage proof			在端子之间施加 250V AC(50HZ 或 60HZ)/1min 250V AC (50HZ or 60HZ) shall be applied across terminals, for one minute.				无击穿、无飞弧 There should be breakdown and flashover
APPROVE BY 孙自波 12.05.2		21 CHECKED BY	张 华 12.05.21	PRPARE B	Y	金成尧 12.05.21	



			TOAN THE THE PARTY OF THE PARTY					
CUSTOMER		CUSTOMER'S	S P/N GYE	S P/N	PRODUC	Γ	REVISION	
			KAN	10611	TACT SWIT	СН	Α	
	项目		试验条	件			要求	
	ITEM		TEST COND	ITIONS		R	EQUIREMENTS	
	械性能: IANICAL SPE	ECIFICATION						
1	按力 Operating Force	量無关身通所需 Placing the sw vertical and th center of the st	序向放置,在开关的最大力度。 iteh such that the den gradually increasem, the maximum shall be measured.	lirection of swasing the load load required	vitch operation is	6	refer to chart 3	
2	最大行程 Full Travel	开关驱动件顶端 Placing the sw vertical and the	三方向放置,以一个编中心,测量顶端移 itch such that the d en applying static loa e stem; the travel d oe measured.	S 0	0.25±0.1mm			
APPROVE BY 孙		孙自波 12.05.21	CHECKED BY	张 华 12.0	)5.21 PRP	ARE BY	金成尧 12.05.21	



	GANG	GYUAN	APPRO	JAVC	SPE	CIFIC	CATIO	ONS
С	USTOMER	CUSTOMER'S P/N	GYE'S	P/N	PI	RODUCT		REVISION
			KAN0	611	TAC	T SWITCH	1	А
			试验条 TEST CONDI				RE	要求 QUIREMENTS
3	回弹力 Return Force	开关垂直于操作方向放后,测量顶端向自由位The sample switch is operation is vertical at to the whole travel dis free position shall be r	置转换的力度 installed such nd upon depre tance, the force measured.	that the dessing the stee of the stee	irection stem in i	of switch its center turn-to its	re	efer to chart 3
4	停止强度 Stop Strength	荷持续 1min。 Placing the switch sud vertical, and then a s	操作方向放置,从操作方向向驱动件施加 30N 的静负 n。 e switch such that the direction of switch operation is nd then a static load of 30N shall be applied in the f stem operation for a period of 1 min.			eration is		
5	手柄拔出 强度 Stem Strength	开关垂直于操作方向放的行程范围。 Placing the switch succeptical, and then the opposite to the direction	ch that the dir maximum forc	ection of svee to withsta	witch ope and a pu	eration is		20N.min.
6	可焊性 Solderability	在以下设定条件下进行 Measurements shall b (1) 焊接温度:245±5℃ Solder temperatur (2) 浸入时间:2s±0.5s Immersion time: 2 对于其它步骤参考 The other steps p	e made follow cre : 245±5℃ cs±0.5s g 《GB 5095.6	—86》试验	90%以上 Except for the edg coating should co minimum 90%			for the edge, the should cover a
APP	ROVE BY 並	小自波 12.05.21 CHE	CKED BY	张 华 12.0	05.21	PRPAR	RE BY	金成尧 12.05.21



-			UAN		/ \1 1 1 \	O V/ \L	<u> </u>		<i>,</i> , , , , ,	<u> </u>
С	USTOMER		CUSTOMER	'S P/N	GYE'	S P/N	PI	RODUCT		REVISION
					KAN	0611	TAC	T SWITCH		А
	项目				试 验	条件			II.	要求
	ITEM				TEST CON	IDITIONS			RE	QUIREMENTS
5、极限电气性能: ENVIRONMENTAL SPECIFICATION										
1	低温测试 Resistance low tempera	to	标准湿度的 Following to normal ten measurem (1) 温加 Tem (2) 时	詳品应按照以下实验条件进行测试,实验后样品应放在常温及示准湿度的环境中 1 小时后做性能测试:  Following the test set forth below the sample shall be left in formal temperature and humidity conditions for 1 h before neasurements are made:  □ 温度: 30±2℃ □ Temperature: -30±2℃ □ 时间: 96h □ Time: 96h □ 安路以下安路条件进行测试。安路后採用应放在常温及				be left in	Contac ≤200m 项目 3,	
2	高温测试 Heat resista	ance	标准湿度的 forth below humidity co (1) 温质 ten (2) 时间	temperature:80±2°C				rature and e made:	Contac ≤200ms 项目 3,4	
3	温度周期性 Change temperat	of	样品应放在 试期间样品 After 5 cy allowed to conditions	常温及 应保持 cles of stand for 1 h.	求进行 5 次循环的温度周期性测试,实验后标准湿度的环境中 1 小时后做性能测试。测干燥. following conditions, the sample shall be under normal temperature and humidity and measurements shall be made. During is shall be removed.  Temperature Time  -10±2℃ 2(hour)  -10~65℃ 1  65±2℃ 2  65~-10℃ 1				Contac ≤200ms 项目 3,4	
APP	ROVE BY	孙自	i 波 12.05.21	СНЕ	ECKED BY	张 华 1	2.05.21	PRPARE	E BY	金成尧 12.05.21



С	CUSTOMER	CUSTOMER'S F		S P/N	PRODUCT		REVISION
			KAN	0611	TACT SWITC	4	А
	项目 ITEM		 试验 TEST CON				要求 EQUIREMENTS
4	湿温测试 Moisture resistance	标准湿度的环境 forth below the humidity condi (1) 温度: tempera	下实验条件进行测 竟中 1 小时后做性 sample shall be tions for 1 h befor 60±2℃ ature: 60±2℃ 度: 90%~95% humidity:90% to 96h	l试,实验后 能测试: Fol left in norma re measuren		接触□ Conta ≤200 项目	赴阻:≤200mΩ act resistance:
5	硫化试验 Sulfuration resistance	标准湿度的环境 forth below the humidity condi (1) H2S与 H <sub>2</sub> S gas (2) 时间: Time: 7 (3) 温度: 4	接照以下实验条件进行测试,实验后样品应放在常温及 度的环境中 1 小时后做性能测试: Following the test set elow the sample shall be left in normal temperature and ity conditions for 1 h before measurements are made: H2S 气体浓度: 3ppm±1ppm H <sub>2</sub> S gas concentration: 3ppm±1ppm 时间: 72h Time: 72h 温度: 40±2℃(90~95%RH)temperature: 40±2℃(90~95%RH)			接触□ Conta ≤200□ 项目	
6	盐雾试验 Salt Mist	(1) 温度: 35 tempera (2) 盐溶液浓 salt solu (3) 时间: 8t Time: 8h 实验后的盐沉和	hall be checked a 5℃±2℃ iture: 35℃±2℃ :度: 5±1%(质量 ition : 5±1%(solid n±1h ±1 hour	:百分比) s by mass)	金属件上没有腐蚀斑点 No remarkable corrosion shall be recognized in metal part.		
APP	PROVE BY 孙	自波 12.05.21	CHECKED BY	张 华 12.0	05.21 PRPAF	RE BY	金成尧 12.05.21



С	USTOMER	CUSTOMER'S F	/N GYE	'S P/N	PRODUCT	REVISION
KAN0611 TACT SWITCH						A
	限机械性能 <mark>:</mark> NDURANCE S	SPECIFICATION				
	项目		试 验	条件		要求
	ITEM			NDITIONS		REQUIREMENTS
	I I LIVI	根据下面的测量	要求进行测试:	NDITIONS		TLQOITLINEITO
1	工作寿命 Operation li	Measurement (1) DC 12V DC 12V (2) 按动速 <sup>2</sup> Rate o (3) 按力: Operatin (4) 平均无	shall be made fo , 50mA 带负载 50 mA resistive 运: 1 次/秒 operation: 1tim 安力的 1.5 倍	e load es/s rating Force1	Wife A N	接触电阻≤200mΩContact resistance≤200mΩ 触点弹力≤10ms Contact bounce≤10ms 按力:初值的±30% Operating Force: initial value±30% 项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3
2	振动 Vibrati	(1) 振动频 Vibra (2) 振幅 Ampli on (3) 振动力 Direct direct (4) 测试时	shall be made fo 率范围: 10~55 on frequency ra 峰一峰): 1.5m ude: 1.5mm 向: 包括手柄行	5~10Hz inge: 10 to 55 m 程方向在内的 :Three mutua direction of s s .	三个相互垂直的方ally perpendicular	项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3
	接条件: ERING COND	ITIONS:				
		请按具	下条件进行焊接	ट्र <b>ः</b>		
	工工归校		锡温度: ≤350			
7.1	手工焊接 Hand solder	` ,	续焊接时间: ≤	3 s		
	Tidila doladi		e practice accor	ding to below	conditions:	
			ldering tempera			
APP	ROVE BY	孙自波 12.05.21	CHECKED BY	张 华 12.	05.21 PRPARI	E BY 金成尧 12.05.21



CUSTOMER C		CUSTOMER'S P/N	CUSTOMER'S P/N GYE		PRODUCT	REVISION			
	KA				TACT SWITCH	А			
	自动浸焊	项目 Items			条件 Condition				
	Conditions for	助焊剂附着量 Flux built-up		不附着于零部件贴装面的程度 Mounting surface should not be coated with flax					
	W/[	种热温度 Preheating temperature		印刷电路板焊接面的周围温度 100℃ max. Ambient temperature of the soldered surface of PC board. 100℃ max.					
7.2		预热温度时间 Preheating tim	ne		60s max.				
		焊接温度 Soldering temperature		260℃ max.					
	焊接浸渍时间 Continuous dipping time		5s max.						
		焊接次数		2次以下					
	No. 10. 11.	Number of solds	ering	2times max.					
	焊接说明:								

#### 焊接况明:

1、开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent.

1.1 在使用烙铁的情况下,焊锡温度应在 350℃以下、3 秒以内。

In the case of using solding iron, solding conditions shall be 350℃ max and 3 sec.max.

1.2 浸焊后,注意不要在顶部施加负荷。

Right after switches were soidered; please be careful not to load to on the knobs of switches.

- 2、设计中应注意的事项( Design instructions)
- 2.1 印刷基板的安装孔尺寸参见产品图。

Follow recommended P.W.B. piercing plan in outside drawing page.

- 3、注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关。

Please be cautions not to give excessive static load or shock to swiches.

3.2 开关浸焊后,印刷基板注意不要叠放。

Please be careful not to pile up P.W.B.after switches were soldered.


3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要 打开包装箱。

Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially. When you need to preserve for a long period, do not open the carton.

APPROVE BY   孙自波 12.05.21   CHECKED BY   张 华 12.05.21   PRPARE BY   金成尧 12.05.21
--



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0611	TACT SWITCH	А

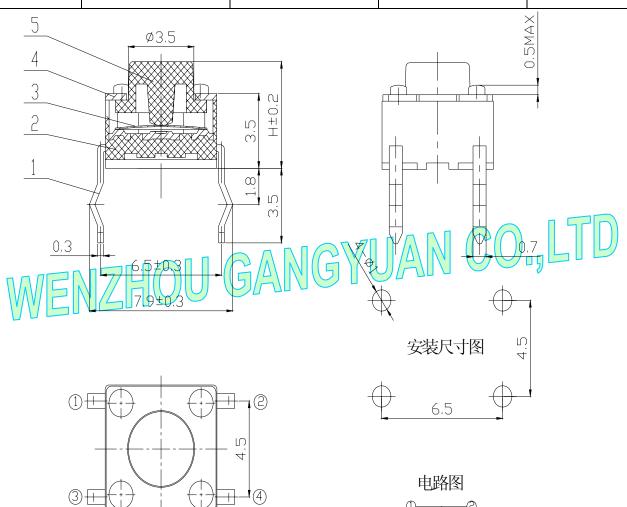

General tolerance: ±0.2mm

Π6

	NO.	NAME	MATERIAL	NATIONALITY	QTY.	FINIS	SHING
	1	TERMINAL	Brass	China	1	Silver plating	
	2	CASE	PA66	China	1	ВІ	ack
	3	CONTACT	Phosphor bronze	Korea	1	Single overlying silver	
	4	COVER	SPCC-SD	China	1	CuSn	plating
	5	OTEM.	PA66	China	1	H≤9	9.5mm
	5	STEM	PC	China		H>9	9.5mm
APPF	ROVE BY	孙自波 12.05.21	CHECKED BY	张华12.05	5.21 F	PRPARE BY	金成尧 12.05.