

Features

- Low voltage drop: 0.18V@100mA
- High input voltage: 25V
- Low temperature coefficient
- Large Output Current: >0.4A
- Low Quiescent Current: 2.0uA
- Output voltage accuracy: tolerance ±1%
- Built-in current limiter
- SOT89,SOT23 and SOT23-3packages

Applications

- Battery-powered equipment
- Hand-Hold Equipment
- GRS Receivers
- Wireless LAN

General Description

The HE2031 series is a group of positive voltage output, three-pin regulators, it provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The HE2031 consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Load Transient response has improved in comparison to the existing series. SOT89, SOT23-3 and SOT23 packages are available.

Selection Table

| Part No. | Output Voltage | Package | Marking |
|--------------|----------------|---------|-----------------------|
| HE2031A25Mxx | 2.5V | | |
| HE2031A28Mxx | 2.8V | | |
| HE2031A30Mxx | 3.0V | | |
| HE2031A33Mxx | 3.3V | SOT89 | |
| HE2031A36Mxx | 3.6V | SOT23-3 | Refer to Marking rule |
| HE2031A40Mxx | 4.0V | SOT23 | |
| HE2031A45Mxx | 4.5V | | |
| HE2031A50Mxx | 5.0V | | |


Order Information

HE2031A①②③④⑤

| Designator | Symbol | Description |
|------------|---------|--------------------------|
| ①② | Integer | Output Voltage(1.8~5.0V) |
| ③ | M | Standard |
| ④ | P | Package:SOT89 |
| | M | Package:SOT23-3 |
| | M3 | Package:SOT23 |
| ⑤ | R | RoHS / Pb Free |
| | G | Halogen Free |

Note:"①②" stands for output voltages. Other voltages can be specially customized

Block Diagram

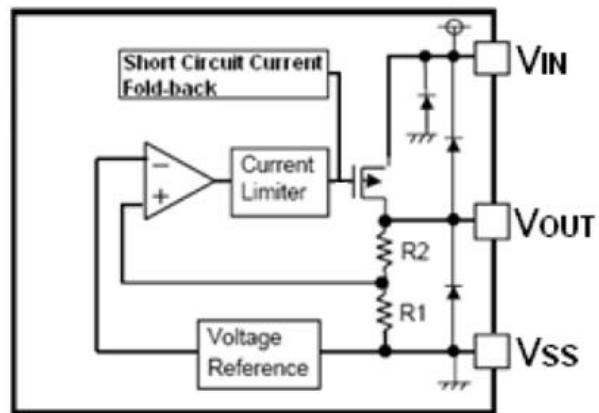

Pin Assignment

SOT23,SOT23-3(Top View)

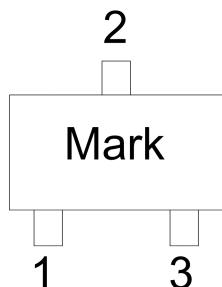


Table1: HE2031AXXMMR series (SOT23,SOT23-3 PKG)

| PIN NO. | PIN NAME | FUNCTION |
|---------|----------|--------------------|
| 1 | GND | GND pin |
| 2 | VIN | Input voltage pin |
| 3 | VOUT | Output voltage pin |

SOT89 (Top View)


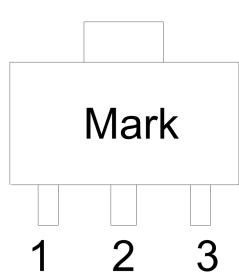


Table2: HE2031AXXMPR series (SOT89 PKG)


| PIN NO. | PIN NAME | FUNCTION |
|---------|----------|--------------------|
| 1 | GND | GND pin |
| 2 | VIN | Input voltage pin |
| 3 | VOUT | Output voltage pin |

Marking Rule SOT23-3 and SOT89

SOT23-3 (Top View)

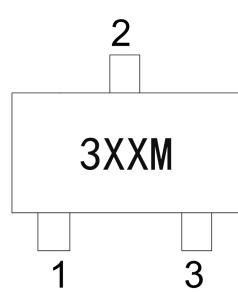

SOT89 (Top View)

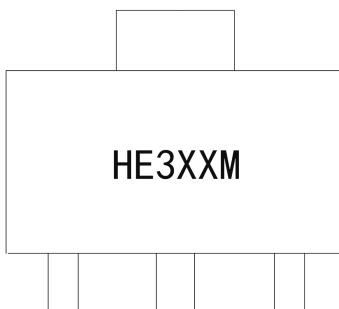

Absolute Maximum Ratings

Supply Voltage 1.5V to 25V Storage Temperature -40°C to 125°C

Operating Temperature -40°C to 85°C

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Electrical Characteristics

HE2031 for any output voltage

(Ta=25°C)


| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--|---|----------------------------------|-----------|------|-----------|--------|
| Output Voltage | Vout | Vin=Vout+1V 1.0mA≤Iout≤30mA | Vout×0.99 | -- | Vout×1.01 | V |
| Output Current*1 | Iout | Vin-Vout=1V | -- | 400 | -- | mA |
| Low dropout*2 | Vdrop | Refer to the next table | | | | |
| Line Regulation | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | 1.6V≤Vin≤8V Iout=100mA | -- | 0.05 | 0.2 | %/V |
| Load Regulation | △Vout | Vin= Vout+1V 1.0mA≤Iout≤100mA | -- | 12 | 30 | mV |
| Output voltage Temperature Coefficient | $\frac{\Delta V_{OUT}}{\Delta T_a}$ | Iout=30mA 0°C≤Ta≤70°C | -- | ±100 | -- | Ppm/°C |
| PSRR | PSRR | F=1KHz Vin=Vout+1V | -- | 60 | -- | dB |
| Supply Current | Iss1 | -- | -- | 1 | 2 | uA |
| Input Voltage | Vin | -- | -- | -- | 25 | V |

Electrical Characteristics by Output Voltage:

| Output Voltage Vout(V) | Dropout Voltage Vdif (V) | | |
|---------------------------|--------------------------|------|------|
| | Conditions | Typ. | Max. |
| Vout ≤ 2.0V | Iout=60 mA | 0.1 | 0.12 |
| 2.0 < Vout ≤ 3.0 | Iout=80 mA | 0.12 | 0.14 |
| 3.0 < Vout ≤ 4.0 | Iout=100 mA | 0.16 | 0.18 |
| 4.0 < Vout ≤ 5.0 | | 0.17 | 0.18 |
| 3.0 < Vout ≤ 4.0 | Iout=200 mA | 0.21 | 0.24 |
| 4.0 < Vout ≤ 6.0 | | 0.20 | 0.22 |
| 3.0 < Vout ≤ 4.0 | Iout=400 mA | 0.8 | 0.85 |
| 4.0 < Vout ≤ 6.0 | | 0.75 | 0.80 |

Typical Application


HE2031

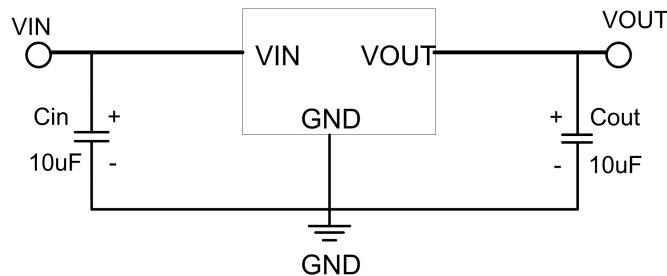

Note1: $C_{in}=C_{out}=10\mu F$. (10 μF Electrolytic capacitor is recommended).


Note2: If the input and output capacitors are ceramic, add a resistor at the input, as follows.

HE2031

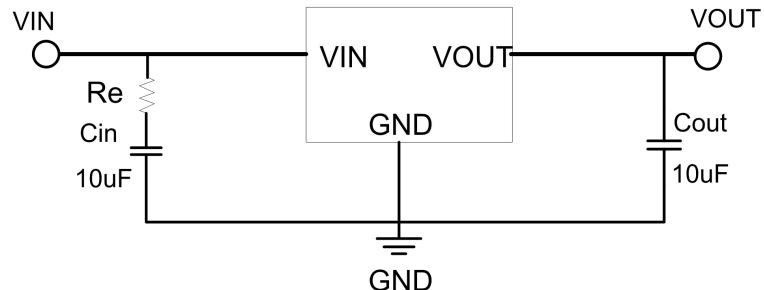


Note: $R_E = (1.2 \sim 1.8) \Omega$.

Package Information
3-pin SOT89 Outline Dimensions

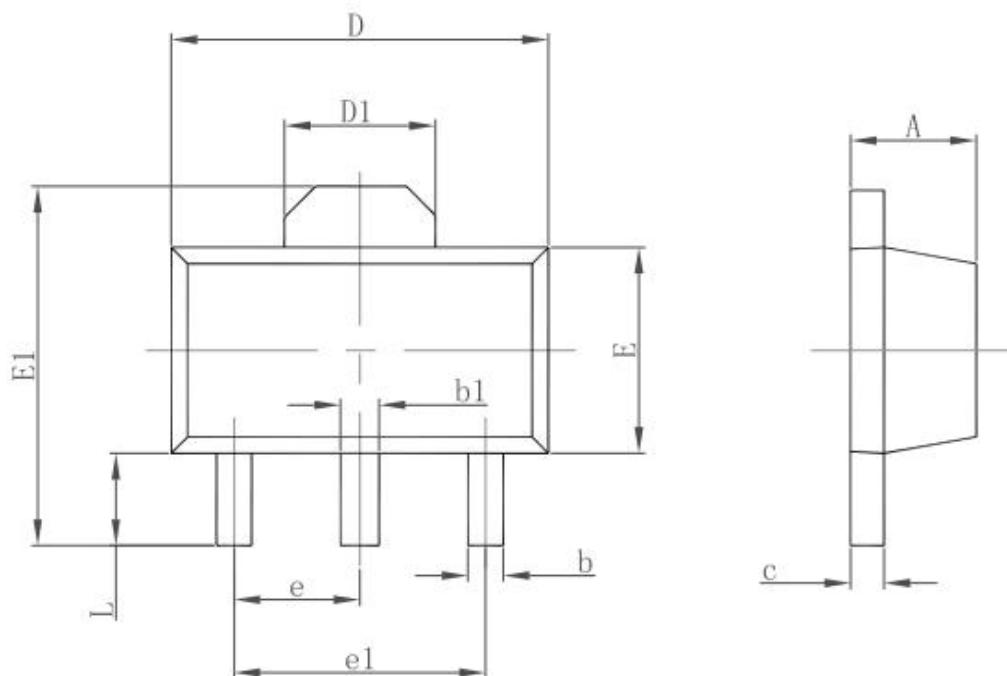

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.400 | 1.600 | 0.055 | 0.063 |
| b | 0.320 | 0.520 | 0.013 | 0.020 |
| b1 | 0.400 | 0.580 | 0.016 | 0.023 |
| c | 0.350 | 0.440 | 0.014 | 0.017 |
| D | 4.400 | 4.600 | 0.173 | 0.181 |
| D1 | 1.550 REF. | | 0.061 REF. | |
| E | 2.300 | 2.600 | 0.091 | 0.102 |
| E1 | 3.940 | 4.250 | 0.155 | 0.167 |
| e | 1.500 TYP. | | 0.060 TYP. | |
| e1 | 3.000 TYP. | | 0.118 TYP. | |
| L | 0.900 | 1.200 | 0.035 | 0.047 |

3-pin SOT23-3 Outline Dimensions

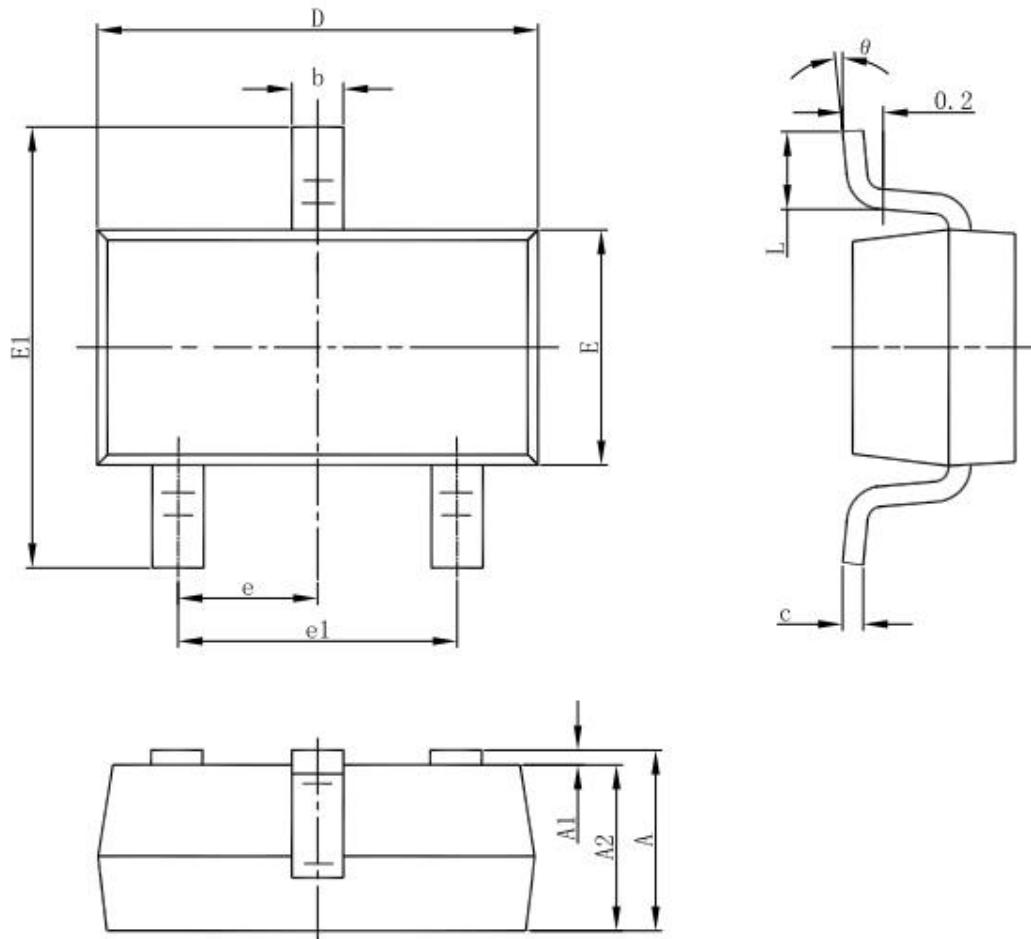

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |