# **MORNSUN**<sup>®</sup>

6W,wide input, isolated & regulated dual/single output, YMD package, DC-DC converter



### FEATURES

- Wide input voltage range (2:1)
- High efficiency up to 87%
- No-load power consumption as low as 0.12W
- Isolation voltage :1.5K VDC
- Input under-voltage protection, output short circuit, over-current, over-voltage protection
- Operating temperature range: -40°C to +85°C
- Meet CISPR22/EN55022 CLASS A, without external components
- Reverse voltage protection available with A2S(Chassis mounting) or A4S(35mm DIN-Rail mounting)
- International standard pin-out
- IEC60950, UL60950, EN60950 approval

VRA\_YMD-6WR3 & VRB\_YMD-6WR3 series are isolated 6W DC-DC products with 2:1 input voltage. The feature efficiency up to 87%, 1500VDC isolation, operating temperature of -40°C to +85°C, input under-voltage protection, output over-voltage, over-current, short circuit protection and EMI meets CISPR22/EN55022 CLASS A, which make them widely applied in medical care, industrial control, electric power, instruments and communication fields. And extension package A2S and A4S also enable them with reverse voltage protection.

		Input Voltage (VDC)		C	Output		Max.
Certification	Part No.®	Nominal <sup>ø</sup> (Range)	Max. <sup>3</sup>	Output Voltage (VDC)	Output Current (mA) (Max./Min.)	(%,Min./Typ.) @ Full Load	Capacitive Load® (µF)
	VRA1205YMD-6WR3			±5	±600/0	79/81	470
	UL/CE/ CB VRA1212YMD-6WR3	12		±12	±250/0	83/85	100
CE	VRB1205YMD-6WR3	(9-18)	20	5	1200/0	79/81	1000
CE	VRB1212YMD-6WR3			12	500/0	83/85	470
	VRA2405YMD-6WR3			±5	±600/0	81/83	470
UL/CE/ CB	VRA2412YMD-6WR3			±12	±250/0	85/87	100
	VRA2415YMD-6WR3			±15	±200/0	85/87	100
	VRB2403YMD-6WR3	24	40	3.3	1500/0	75/77	1800
	VRB2405YMD-6WR3	(18-36)	40	5	1200/0	80/82	1000
CE	VRB2412YMD-6WR3			12	500/0	83/85	470
	VRB2415YMD-6WR3			15	400/0	84/86	220
	VRB2424YMD-6WR3			24	250/0	83/85	100

Notes:

① Part No. with suffix of "A2S" means chassis mounting and suffix of "A4S" means DIN-Rail mounting (e.g. VRB2405YMD-6WR3A2S means chassis mounting; VRB2405YMD-6WR3A4S means DIN-Rail mounting);

② A2S (wiring) and A4S (rail) Model due to input reverse polarity protection function, input voltage range the minimum value and starting voltage is higher than 1VDC DIP package;

③ Absolute maximum rating without damage on the converter, but it isn't recommended;

(a) Efficiency is measured in nominal input voltage and rated output load; A2S (wiring) and A4S (rail) Model due to input reverse polarity protection, minimum efficiency greater than Min.-2 is qualified;

(5) The capacitive loads of positive and negative outputs are identical.

Input Specifications						
Item	Operating Conditions		Min.	Тур.	Max.	Unit
Input Current (full load / no-load)	12VDC nominai input series, nominai input voltage			603/10	633/22	
	24VDC nominai input series, nominai input voltage	3.3V output		268/5	275/15	mA
		Others		296/5	313/15	
Reflected Ripple Current				20		
	12VDC nominai input voltage		-0.7		25	VDC
Surge Voltage (1sec. max.)	24VDC nominai input voltage		-0.7		50	
Starting Voltage	12VDC nominai input voltage				9	
	24VDC nominai input voltage				18	

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

## DC/DC Converter VRA\_YMD-6WR3 & VRB\_YMD-6WR3 Series



Input Under-voltage Protection	12VDC nominai input voltage	5.5	6.5		VDC
input onder-voltage Protection	24VDC nominai input voltage	12	15.5		VDC
Input Filter		Pi filter			
Hot Plug		Unavailable			

Item	Operating Conditions		Min.	Typ.	Max.	Unit
	5%-100% load		±l	±3		
Dutput Voltage Accuracy ine Regulation .oad Regulation® Cross Regulation	0% F% logg	±5V output		±2	±5	
	0%-5% load	others		±l	±3	
	Full load, the input voltage is	Positive output		±0.2	±0.5	
Line Regulation	from low voltage to high voltage	Negative output		±0.5	±l	%
Lead Desulation <sup>®</sup>	5%-100% load	Positive output		±0.5	±l	
		Negative output		±0.5	±1.5	
Cross Regulation	Dual output, main circuit with 50% load, auxiliary circuit with 10%-100% load				±5	
Transient Recovery Time				300	500	μs
Transient Response Deviation	25% load step change	3.3V, 5V, ±5V output		±5	±8	%
		Others		±3	±5	
Temperature Coefficient	Full load				±0.03	%/°C
Ripple & Noise <sup>®</sup>	20MHz bandwidth, 5%-100% k	bad		60	85	mV p-p
Over-voltage Protection			110		160	%Vo
Over-current Protection	Input voltage range		110	140	190	%lo
Short circuit Protection			Continuous, self-recovery			

Note: (1) When testing from 0% -100% load working conditions, load regulation index is  $\pm 5\%$ ;

(20%-5% load ripple&Noise is no more than 5%Vo.Ripple and noise are measured by "parallel cable" method, please see DC-DC Converter Application Notes for specific operation.

Item	Operating Conditions	Min.	Тур.	Max.	Unit	
Insulation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA	1500			VDC	
Insulation Resistance	Input-output, insulation voltage 500VDC	1000			MΩ	
Isolation Capacitance	Input-output, 100KHz/0.1V		1000		pF	
Operating Temperature	see Fig. 1	-40		+85	°C	
Storage Humidity	Without condensation	5		95	%RH	
Storage Temperature		-55		+125		
Lead Temperature	Welding spot is 1.5mm away from the casing, 10 seconds			+300	°C	
Vibration		10-55H	10-55Hz, 10G, 30 Min. along X, Y and Z			
Switching Frequency *	PWM mode		300		KHz	
MTBF	MIL-HDBK-217F@25°C	1000			K hours	

Note:\* This series of products using reduced frequency technology, the switching frequency is test value of full load. When the load is reduced to below 50%, the switching frequency decreases with decreasing load.

Physical Specifications						
Casing Material	Aluminum alloy					
	Horizontal package	25.40*25.40*11.70 mm				
Dimension	A2S chassis mounting	76.00*31.50*21.20 mm				
	A4S DIN-rail mounting	76.00*31.50*25.80 mm				
Weight Horizontal package/A2S wiring package/A4S rail package		14g /36g /56g(Typ.)				
Cooling method	Free air convection					

MORNSUN®


MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation


# MORNSUN®

EMC	C Specifications			
EMI	CE	CISPR22/EN55022	CLASS A (without external components)/ CLASS B (see Fig.3-② for recommended circuit)	
	RE	CISPR22/EN55022	CLASS A (without external components)/ CLASS B (see Fig.3-② for recommended circuit)	
	ESD	IEC/EN61000-4-2	Contact ±4KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (see Fig.3-① for recommended circuit)	perf. Criteria B
EMS	Surge	IEC/EN61000-4-5	line to line $\pm 2$ KV (see Fig.3- $\oplus$ for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-29	0%, 70%	perf. Criteria B

### Product Characteristic Curve

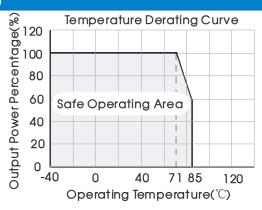



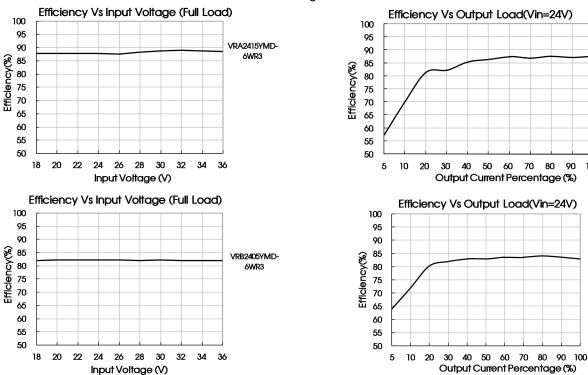

**MORNSUN®** 

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2016.11.07-A/2 Page 3 of 5

VRA2415YMD-

6WR3

100

VRB2405YMD-

6WR3

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation




#### Design Reference

#### 1. Typical application


All the DC/DC converters of this series are tested according to the recommended circuit (see Fig. 2) before delivery. If it is required to further reduce input and output ripple, properly increase the input & output of additional capacitors Cin and Cout or

select capacitors of low equivalent impedance provided that the capacitance is no larger than the max. capacitive load of the product.



Vin(VDC)	Cin(uF)	Cout(uF)
12	100	10
24	10 - 47	10

#### 2. EMC solution-recommended circuit

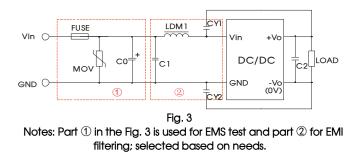


Parameter description

Vin:12V Vin:24V								
Choose according to actual input current								
S14K20	S20K30							
1000µF/35V	1000µF/50V							
1µF/	'50V							
Refer to the	Cout in Fig.2							
4.7µH								
InF/2KV								
	Vin: 12V Choose according to S14K20 1000µF/35V 1µF/ Refer to the 4.7							

- 3. It is not allowed to connect modules output in parallel to enlarge the power
- 4. For more information please find DC-DC converter application notes on www.mornsun-power.com

#### **Dimensions and Recommended Layout**


-11.70 [0.461]-

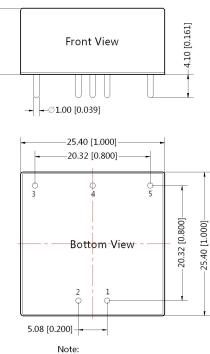

Unit :mm[inch] Pin diameter tolerances :±0.10[±0.004] General tolerances:±0.50[±0.020]

MORNSUN®

THIRD ANGLE PROJECTION



Note:Grid 2.54\*2.54mm

	Pin-Out							
Pin	Single	Dual						
1	GND	GND						
2	Vin	Vin						
3	+Vo	+Vo						
4	No Pin	0V						
5	0V	-Vo						


MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.



#### VRA\_YMD-6WR3A2S & VRB\_YMD-6WR3A2S Dimensions

THIRD ANGLE PROJECTION  $\bigoplus$ 


THIRD ANGLE PROJECTION

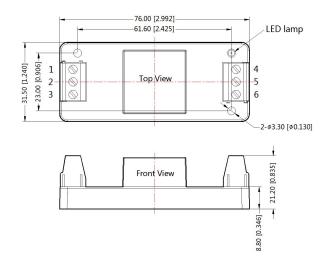


Pin-Out								
Pin	1	2	3	4	5	6		
Dual	NC	GND	Vin	-Vo	0V	+Vo		
Single	NC	GND	Vin	0V	NC	+Vo		

Note: Unit: mm[inch] Wire range: 24-12 AWG Tightening torque: Max 0.4 N·m General tolerances: ±0.50[±0.020]

#### VRA\_YMD-6WR3A4S & VRB\_YMD-6WR3A4S Dimensions

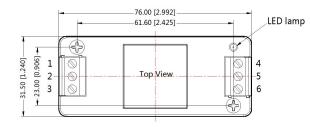

Pin-Out								
Pin	1	2	3	4	5	6		
Dual	NC	GND	Vin	-Vo	0V	+Vo		
Single	NC	GND	Vin	0V	NC	+Vo		

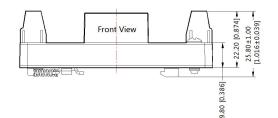

Note:
Unit: mm[inch]
Mounting rail: TS35
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: ±0.50[±0.020]

#### Note:

- 1. Packing information please refer to Product Packing Information which can be downloaded from <u>www.mornsun-power.com</u>. Packing bag number: 58210003(DIP), 58220022(A2S/A4S package);
- The recommended unbalance degree of the dual output module load is ≤±5%; if the degree exceeds ±5%, than the product
  performance cannot be guaranteed to comply with all parameters in the datasheet. Please contact our technicians directly for
  specific information;
- 3. The maximum capacitive load offered were tested at input voltage range and full load;
- 4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 5. All index testing methods in this datasheet are based on Company's corporate standards;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Specifications are subject to change without prior notice.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. ChinaTel: 86-20-38601850-8801Fax: 86-20-38601272E-mail: info@mornsun.cn

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2016.11.07-A/2 Page 5 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation