
Power Beads - PA4792.XXXHL, PA4793.XXXHL & PA5121 Series





@ Current Rating: PA4792 (100Apk), PA4793 (60Apk)

@ **Inductance Range:** 200nH to 500nH

@ **Height:** 7.25mm Max (PA4792)

6.6mm Max (PA4793) 5.35mm Max (PA5121)

@ **Footprint:** 22.2mm x 8.2mm Max (PA4792)

15.1mm x 8.6mm Max (PA4793) 8.3mm x 7.5mm Max (PA5121)

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C ⁷											
Part Number	Inductance ¹ @ OA _{DC}	Inductance ² @Irated (nH TYP)	Irated ³ (ADC)	$\frac{\text{DCR}^4}{(\text{m}\Omega)}$	Saturation (A TY		Heating Current⁶ (A TYP)	Hi-pot ¹⁰ (Vdc)			
Mullipel	(nH ±10%)				25℃	100°C	(ATTP)				
PA4792.XXXHL: 22.2 x 8.2 x 7.25mm Max											
PA4792.231HLT	230	230	46	0.47±10%	100	86	46	200			
PA4793.XXXHL: 15.1 x 8.6 x 6.6mm Max											
PA4793.501HLT	500	470	40	1.15±15%	60	51	40	200			
PA5121.XXXHL: 8.3 x 7.5 x 5.35mm Max											
PA5121.201HLT	200	200	13	0.65 +/-0.15	25	21	13	200			
PA5121.231HLT	230	230	13	0.65 +/-0.15	23	19.5	13	200			

NOTES:

- Inductance measured at 100kHz, 100mVrms. For PA4793 the listed inductance is measured from 1-3 with pins 2.4 shorted
- 2. Inductance at Irated is the value of the inductance at 25°C at the listed rated current.
- The rated current as listed is either the saturation current (25°C or 100°C) or the heating current depending on which value is lower.
- 4. The nominal DCR is measured from point ① to point ② , as shown below on the mechanical drawing. For PA4793 the listed DCR value is for each winding.
- 5. The saturation current is the typical current which causes the inductance to drop by 20% (for PA4792 and PA4793) or 2% (for PA5121) at the stated ambient temperatures (25°C, 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- 6. The heating current is the DC current which causes the part temperature to increase by

- approximately 40°C when used in a typical application.
- 7. In high volt*time applications, additional heating in the component can occur due to core losses in the inductor which may neccessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise curves can be used.
- 8. Parts with the HLT suffix are sold in tape and reel packaging. Pulse complies to industry standard tape and reel specification EIA-481.
 - Samples of these parts can be ordered by removing the HLT suffix and replacing with HL.
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- 10. Hi-pot is measured from the bottom of the core to the leads. Hi-pot is tested for 2sec with a leakage current maximum of 0.1mA.


Power.PulseElectronics.com P853.E (06/20)

Power Beads - PA4792.XXXHL, PA4793.XXXHL & PA5121 Series



Schematic Mechanical

PA4792.XXXHLT

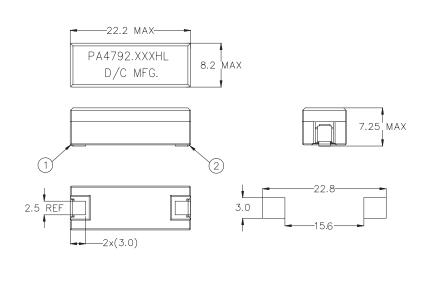


FINAL OUTLINE

-14.6±0.5-

RECOMMENDED PAD LAYOUT

-10 REF




Weight5.20grams Tape & Reel500/reel

Dimensions: mm

Unless otherwise specified, all tolerances are ± 0.25

Mechanical Schematic

PA4793.XXXHLT

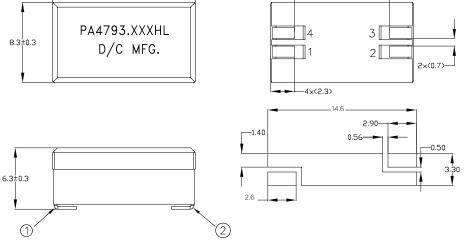

Weight3.39grams Tape & Reel500/reel

Dimensions: mm

Unless otherwise specified, all tolerances are ± 0.25

FINAL OUTLINE


RECOMMENDED PAD LAYOUT

Power Beads - PA4792.XXXHL, PA4793.XXXHL & PA5121 Series





Mechanical Schematic

PA5121.XXXHLT



3





Weight	2.8grams
Tape & Reel	800/ree


Dimensions: mm

Unless otherwise specified, all tolerances are ± 0.25


Power.PulseElectronics.com P853.E (06/20)



PA4792.231HL, Lvsl, 25 °C/100 °C

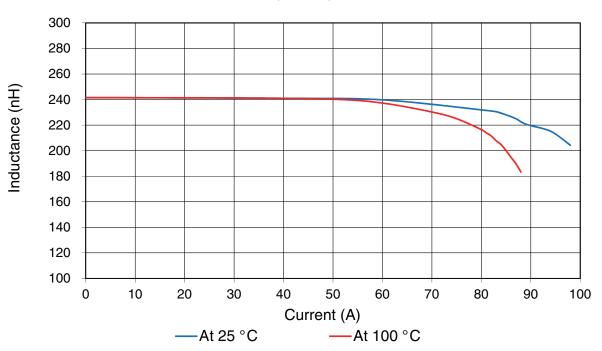

PA4793.501HL, Lvsl, 25 °C/100 °C

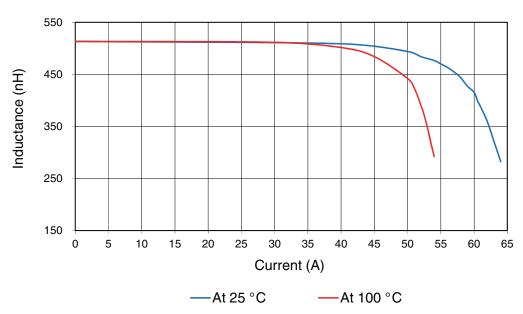


Power.PulseElectronics.com


5



PA5121.201HLT, LvsI, 25C and 100C

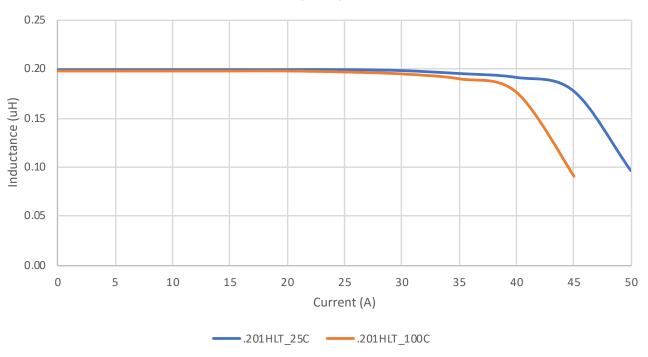


PA5121.231HLL vs I curve

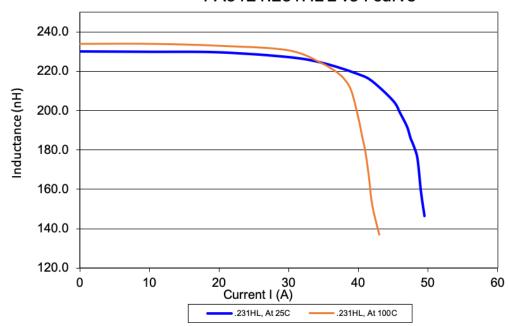


Power.PulseElectronics.com P853.E (06/20)

Power Beads - PA4792.XXXHL, PA4793.XXXHL & PA5121 Series

TAPE & REEL INFO

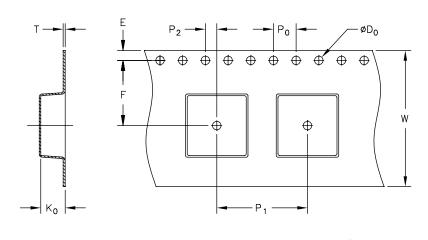



USER DIRECTION OF FEED

SURFACE MOUNTING TYPE, REEL/TAPE LIST														
TYPE	REEL SIZE (mm)			TAPE SIZE (mm)									QTY	
	Α	W 1	W ₂	N	E	F	Do	P ₀	P ₁	P ₂	W	Ţ	K o	PCS/REEL
PA4792.XXXHLT	Ø330	44.4	50.4	100	1.75	20.2	1.5	4	16	2	44	0.5	7.9	500
PA4793.XXXHLT	Ø330	32.4	38.4	100	1.75	14.2	1.5	4	16	2	32	0.5	7	500
PA5121.XXXHLT	Ø330	16.4	32.4	100	1.75	7.5	1.5	4.0	12	2	16	0.4	5.6	800

For More Information:

Americas - prodinfo_power@pulseelectronics.com | Europe - power-apps-europe@pulseelectronics.com | Asia - power-apps-asia@pulseelectronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. Pulse Electronics, Inc. All rights reserved.

