


Sulfur tolerant chip resistors

SFR series Datasheet

Features

- 1) Special construction prevents sulfur gas penetration, significantly increasing reliability.
- 2) ROHM resistors have obtained ISO9001 / ISO / TS16949 certification.
- 3) Corresponds to AEC-Q200.



Products list

Part No.	Siz	ze	Rated power	Limiting element	Temperature coefficient	Resistance tolerance	Resista	nce range	Operating temperature	Automotive grade								
	(mm)	(inch)	(70°C) (W)	voltage (V)	(ppm/°C)		(Ω)	range (°C)	available								
					±100	F(±1%)	10 ≦R≦2.2M	(E24/96 series)										
SFR01	1005	0402	0.063	50	+500 / -250	J(±5%)	1.0≦R<10	(E24 series)	-55 ~ +155	Yes								
SERUI	1005	0402			±200	J(±5%)	10 ≦R≦10M	(E24 series)	-55 ~ +155	165								
					Jumper type) Rm	nax = 50mΩ M	AX. / Imax = 1A											
					±100	F(±1%)	10 ≦R≦10M	(E24/96 series)										
SFR03	1600	1608	0603	0.10	50	±400	J(±5%)	1≦R<10	(E24 series)	-55 ~ +155	Yes							
SINUS	1000	0003			±200	J(±5%)	10 ≦R≦10M	(E24 series)	-55 ~ +155	165								
			Jumper type) Rmax = 50 mΩ MAX. / Imax = 1 A															
	2012	0805	0.125	.125 150	±100	F(±1%)	10 ≦R≦2.2M	(E24/96 series)	-55 ~ +155	Yes								
SFR10					±400	J(±5%)	1 ≦R<10	(E24 series)										
Silkio	2012				±200	J(±5%)	10 ≦R≦10M	(E24 series)										
				Jumper type) Rmax = 50mΩ MAX. / Imax = 2A														
		1206											±100	F(±1%)	10 ≦R≦2.2M	(E24/96 series)		
SFR18	3216		0.25	200	±400	J(±5%)	1 ≦R<10	(E24 series)	-55 ~ +155	Yes								
OI IXIO	3210				±200	J(±5%)	10 ≦R≦10M	(E24 series)	-50 ** 1100	163								
				Jumper type) Rmax = 50mΩ MAX. / Imax = 2A														
			0.5	200	±100	F(±1%)	10≦R≦1M	(E24/96 series)		Yes								
SFR25	3225	1210	0.0	200	±200	J(±5%)	1≦R≦1M	(E24 series)	-55 ~ +155									
					Jumper type) Rn	$max = 50m\Omega M$	AX. / Imax = 2A											

^{*} Design and specifications are subject to change without notice.

Carefully check the specification sheet supplied with the product before using or ordering it.

Part Number Description




(Sulfur tolerant

chip resistors)

SFR









Packaging specifications code							
Part No.			Quantity / Reel				
SFR01 MZP		Paper tape (2mm Pitch)	10,000				
SFR03	EZP	Paper tape (4mm Pitch)	5,000				
SFR10	EZP	Paper tape (4mm Pitch)	5,000				
SFR18	EZP	Paper tape (4mm Pitch)	5,000				
SFR25	JZP	Embossed tape (4mm Pitch)	4,000				



Resistance tolerance F(±1%) J(±5%)

1 0 5

Nominal resistance
Resistance code, 3 or 4 digits 000 denotes jumper type.
000 denotes jumper type.

	Resistance tolerance		Resistance code
	F J	:	4 digits 3 digits
≡×	1Ω= 1R0	`	,
	$9.1\Omega = 9R1$	`	£5%)

 $9.1\Omega = 9R1 (\pm 5\%)$ $10\Omega = 10R0 (\pm 1\%)$ $100 (\pm 5\%)$

 $100 (\pm 5\%)$ $1M\Omega = 1004 (\pm 1\%)$


ω=1004 (±1%) 105 (±5%)

^{*} E24 : Standard products, E96 : Custom products.

•Chip resistor dimensions and markings

■ SFR 01


■ SFR 03/10/18/25



(Unit:mm)

Part No.	(mm)	(inch)	L	W	t	а	b	Marking existence *Including jumper type
SFR01	1005	0402	1.0±0.05	0.5±0.05	0.35±0.05	0.33±0.08	0.25 ^{+0.05} _{-0.10}	No
SFR03	1608	0603	1.6±0.1	0.8±0.1	0.45±0.1	0.4±0.2	0.3±0.2	Yes
SFR10	2012	0805	2.0±0.1	1.25 ±0.1	0.55±0.1	0.4±0.2	0.4±0.2	Yes
SFR18	3216	1206	3.2 ^{+0.15} _{-0.20}	1.6±0.15	0.55±0.1	0.55±0.25	0.5±0.25	Yes
SFR25	3225	1210	3.2 ^{+0.15} _{-0.20}	2.5±0.15	0.55±0.1	0.55±0.25	0.5±0.25	Yes

● Land pattern example

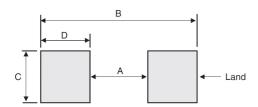

(Unit:mm)


Dimensions Part No.	А	В	С	D
SFR01	0.5	1.3	0.5	0.4
SFR03	1.0	2.0	0.8	0.5
SFR10	1.2	2.6	1.15	0.7
SFR18	2.2	4.0	1.5	0.9
SFR25	2.2	4.0	2.3	0.9

SFR series Datasheet

Derating curve

When the ambient temperature exceeds 70°C, power dissipation must be adjusted according to the derating curves below.

■SFR 01/03/10/18/25



Characteristics

Test items	Guaran	teed value	Test conditions	
lestitems	Resistor type Jumper type		lest conditions	
Resistance	Se	e P.1	20°C	
Variation of resistance with temperature	Se	e P.1	Measurement: +25/+125°C	
Overload	±2.0%	MAX 50mΩ	Rated voltage(current)×2.5, , 2s Maximum overload voltage※	
Solderability	Anew uniform co of 95% of the sur immersed and n damage.	•	Rosin-ethanol solution(25% weight) Soldering condition: 245±5°C Duration of immersion: 2.0±0.5s	
Resistance to soldering heat	$\pm 1.0\%$ MAX $50 \text{m}\Omega$ No remarkable abnormality on the appearance.		Soldering condition: 260±5°C Duration of immersion: 10±1s	
Rapid change of temperature	±1.0%	MAX 50mΩ	Test temp:-55°C∼+125°C 5cycle	
Damp heat, steady state	±3.0%	MAX 100mΩ	40°c, 93%(Relative humidity) Test time: 1,000h	
Endurance at 70°C	±3.0%	MAX 100mΩ	Rated voltage(current),70°C 1.5h:ON – 0.5h:OFF Test time: 1,000h	
Endurance	±3.0%	MAX 100mΩ	155°C Test time: 1,000h	
Resistance to solvent	±1.0%	MAX 50mΩ	23±5°c, Immersion cleaning, 5±0.5min Solvent: 2-propanol	
Bend strength of the end face plating	±1.0% Without mechanical d	MAX 50mΩ amage such as breaks.	-	
Resistance in Sulfur vapor	±1.0%	MAX. 50mΩ	Put specimen and sulfur powder 10g in the desiccator which is placed under 110°C environment after sealed. Test time:1,000h	

Compliance Standard(s): IEC60115-8

JISC 5201-8


※Maximum overload voltage (Voltage of overload test)

SFR01	SFR03	SFR10	SFR18	SFR25
100V	100V	200V	400V	400V



●Tape dimensions


■Paper tape

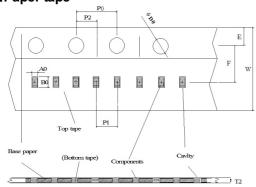

					(Unit : mm)
Part No.	W	F	Е	A0	B0
SFR01	8.0±0.3	3.5±0.05	1.75±0.1	0.7±0.1	1.2±0.1
SFR03	8.0±0.3	3.5±0.05	1.75±0.1	1.1±0.1	1.9±0.1
SFR10	8.0±0.3	3.5±0.05	1.75±0.1	1.65 ^{+0.2} -0.1	2.4 ^{+0.2} -0.1
SFR18	8.0±0.3	3.5±0.05	1.75±0.1	1.95 ^{+0.1} -0.05	3.5 ^{+0.15} _{-0.05}


Part No.	D0	P0	Pl	P2	T2
SFR01	Ф1.5 ^{+0.1}	4.0±0.1	2.0±0.05	2.0±0.05	MAX1.1
	Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1
SFR10	Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX 1.1
SFR18	Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1

■Embossed tape



					(Unit:mm)
Part No.	W	F	Е	A0	B0
	8.0±0.3	3.5±0.05	1.75±0.1	3.0±0.1	3.5±0.1
SFR25	D0	P0	P1	P2	T2
	Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1

Reel dimensions

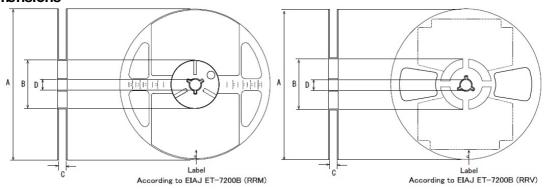

=				(Unit:mm)
Part No.	А	В	С	D
SFR01				
SFR03				
SFR10	Ф180 ⁰ -1.5	Ф60 ^{+1.0}	9 ^{+1.0}	Ф13±0.2
SFR18				
SFR25				

Notice

Precaution on using ROHM Products

1. If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

(110to 1) Modical Equipment Glacomodilori of the opcomo Applications					
JAPAN	USA	EU	CHINA		
CLASSⅢ	CLASSIII	CLASS II b	CLASSⅢ		
CLASSIV	CLASSIII	CLASSⅢ	CLASSIII		

- 2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure
- 3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
 - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
 - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
 - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
 - [f] Sealing or coating our Products with resin or other coating materials
 - [g] Use of our Products without cleaning residue of flux (Exclude cases where no-clean type fluxes is used. However, recommend sufficiently about the residue.); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
 - [h] Use of the Products in places subject to dew condensation
- 4. The Products are not subject to radiation-proof design.
- 5. Please verify and confirm characteristics of the final or mounted products in using the Products.
- 6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse, is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- 7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.
- 8. Confirm that operation temperature is within the specified range described in the product specification.
- 9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

- 1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- 2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

Precautions Regarding Application Examples and External Circuits

- 1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
- 2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of lonizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

- 1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
 - [a] the Products are exposed to sea winds or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [b] the temperature or humidity exceeds those recommended by ROHM
 - [c] the Products are exposed to direct sunshine or condensation
 - [d] the Products are exposed to high Electrostatic
- Even under ROHM recommended storage condition, solderability of products out of recommended storage time period
 may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is
 exceeding the recommended storage time period.
- 3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

Precaution Regarding Intellectual Property Rights

- 1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.
- 2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).
- 3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

Other Precaution

- 1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
- 2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
- In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
- 4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

Notice-PAA-E Rev.004

General Precaution

- 1. Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.
- 2. All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.
- 3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

Notice – WE Rev.001