


High junction temperature Transil™

Datasheet - production data

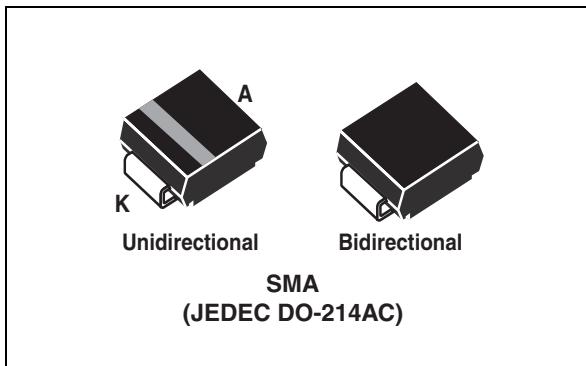

Features

- Peak pulse power:
 - 600 W (10/1000 µs)
 - 4 kW (8/20 µs)
- Stand off voltage range: from 5 V to 188 V
- Unidirectional and bidirectional types
- Low clamping voltage versus standard series
- Low leakage current:
 - 0.2 µA at 25 °C
 - 1 µA at 85 °C
- Operating T_j max: 175 °C
- JEDEC registered package outline

Complies with the following standards

- IEC 61000-4-2 level 4:
 - 15 kV (air discharge)
 - 8 kV (contact discharge)
- MIL STD 883G-Method 3015-7: class3B
 - 25 kV (human body model)

Description

The SMA6J Transil series has been designed to protect sensitive equipment against electro-static discharges according to IEC 61000-4-2, MIL STD 883 Method 3015, and electrical overstress such as IEC 61000-4-4 and 5. They are generally for surges below 600 W 10/1000 µs.

This planar technology makes it compatible with high-end equipment and SMPS where low leakage current and high junction temperature are required to provide reliability and stability over time. Their low clamping voltages provides a better safety margin to protect sensitive circuits with extended life time expectancy.

Packaged in SMA, this minimizes PCB space consumption (SMA footprint in accordance with IPC 7531 standard).

TM: Transil is a trademark of STMicroelectronics

1 Characteristics

Table 1. Absolute ratings ($T_{amb} = 25^{\circ}\text{C}$)

| Symbol | Parameter | | Value | Unit |
|-----------|--|---|-------------|--------------------|
| P_{PP} | Peak pulse power dissipation ⁽¹⁾ | T_j initial = T_{amb} | 600 | W |
| P | Power dissipation on infinite heatsink | $T_{amb} = 55^{\circ}\text{C}$ | 4 | W |
| I_{FSM} | Non repetitive surge peak forward current for unidirectional types | $t_p = 10\text{ ms}$ T_j initial = T_{amb} | 60 | A |
| T_{stg} | Storage temperature range | | -65 to +175 | $^{\circ}\text{C}$ |
| T_j | Operating junction temperature range | | -55 to +175 | $^{\circ}\text{C}$ |
| T_L | Maximum lead temperature for soldering during 10 s | | 260 | $^{\circ}\text{C}$ |

1. For a surge greater than the maximum values, the diode will fail in short-circuit.

Table 2. Thermal resistances

| Symbol | Parameter | Value | Unit |
|---------------|--|-------|----------------------|
| $R_{th(j-l)}$ | Junction to leads | 30 | $^{\circ}\text{C/W}$ |
| $R_{th(j-a)}$ | Junction to ambient on printed circuit on recommended pad layout | 120 | $^{\circ}\text{C/W}$ |

Table 3. Electrical characteristics - definitions ($T_{amb} = 25^{\circ}\text{C}$)

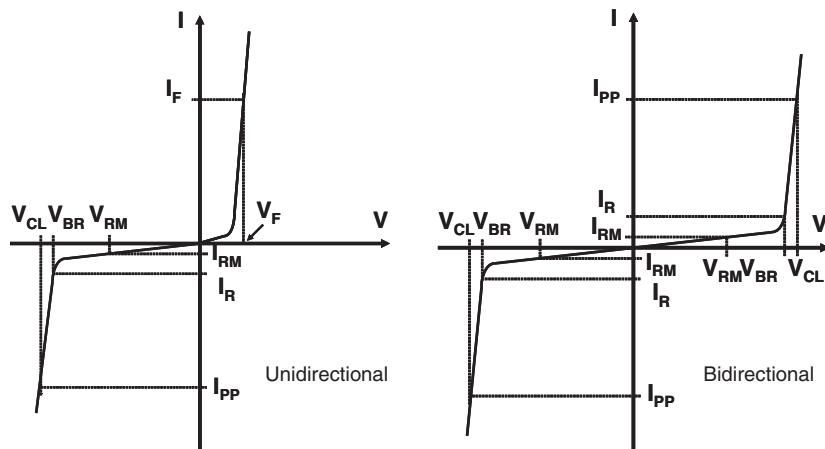
| Symbol | Parameter |  Unidirectional graph: Shows current I increasing from zero at V=0 through a leakage current I_RM at V_RM to a peak pulse current I_PP at V_F. Labels include V_CL, V_BR, V_RM, I_F, I_R, I_PP, and V_F. Bidirectional graph: Shows current I increasing from zero at V=0 through a leakage current I_RM at V_RM to a peak pulse current I_PP at V_CL. Labels include V_CL, V_BR, V_RM, I_F, I_R, I_RM, I_PP, and V_CL. | |
|------------|---------------------------------|---|--|
| V_{RM} | Stand-off voltage | | |
| V_{BR} | Breakdown voltage | | |
| V_{CL} | Clamping voltage | | |
| I_{RM} | Leakage current @ V_{RM} | | |
| I_{PP} | Peak pulse current | | |
| αT | Voltage temperature coefficient | | |
| V_F | Forward voltage drop | | |
| R_D | Dynamic resistance | | |

Table 4. Electrical characteristics - values ($T_{amb} = 25^{\circ}\text{C}$)

| Type | I _{RM} max@V _{RM} | | | V _{BR} @I _R ⁽¹⁾ | | | V _{CL} @I _{PP} 10/1000 μs | | R _D ⁽²⁾ 10/1000 μs | | V _{CL} @I _{PP} 8/20 μs | | R _D ⁽²⁾ 8/20 μs | | $\alpha T^{(3)}$ |
|--------------|-------------------------------------|---------------|-----|--|------|------|---|------|--|----------|--|------|---|------|--------------------------|
| | 25 °C | 85 °C | | min | typ | max | | max | | | max | | max | | max |
| | | μA | V | V | | | mA | V | A | Ω | V | A | Ω | | 10-4/ $^{\circ}\text{C}$ |
| SMA6J5.0A/CA | 20 | 50 | 5.0 | 6.40 | 6.74 | 7.07 | 10 | 9.1 | 68 | 0.029 | 13.4 | 298 | 0.021 | 5.7 | |
| SMA6J6.0A/CA | 20 | 50 | 6.0 | 6.70 | 7.05 | 7.41 | 10 | 9.5 | 61 | 0.034 | 13.7 | 290 | 0.022 | 5.9 | |
| SMA6J6.5A/CA | 20 | 50 | 6.5 | 7.20 | 7.58 | 7.96 | 10 | 10.2 | 56 | 0.040 | 14.5 | 276 | 0.024 | 6.1 | |
| SMA6J8.5A/CA | 20 | 50 | 8.5 | 9.4 | 9.9 | 10.4 | 1 | 13.3 | 41.7 | 0.070 | 19.5 | 205 | 0.044 | 7.3 | |
| SMA6J10A/CA | 0.2 | 1 | 10 | 11.1 | 11.7 | 12.3 | 1 | 15.7 | 37 | 0.093 | 21.7 | 184 | 0.051 | 7.8 | |
| SMA6J12A/CA | 0.2 | 1 | 12 | 13.3 | 14.0 | 14.7 | 1 | 18.8 | 31 | 0.133 | 25.3 | 157 | 0.068 | 8.3 | |
| SMA6J13A/CA | 0.2 | 1 | 13 | 14.4 | 15.2 | 15.9 | 1 | 20.4 | 29 | 0.154 | 27.2 | 147 | 0.076 | 8.4 | |
| SMA6J15A/CA | 0.2 | 1 | 15 | 16.7 | 17.6 | 18.5 | 1 | 23.6 | 25.1 | 0.206 | 32.5 | 123 | 0.114 | 8.8 | |
| SMA6J18A/CA | 0.2 | 1 | 18 | 20.0 | 21.1 | 22.1 | 1 | 28.3 | 21.5 | 0.288 | 39.3 | 102 | 0.168 | 9.2 | |
| SMA6J20A/CA | 0.2 | 1 | 20 | 22.2 | 23.4 | 24.5 | 1 | 31.4 | 19.4 | 0.354 | 42.8 | 93 | 0.196 | 9.4 | |
| SMA6J24A/CA | 0.2 | 1 | 24 | 26.7 | 28.1 | 29.5 | 1 | 37.8 | 16 | 0.516 | 50 | 80 | 0.256 | 9.6 | |
| SMA6J26A/CA | 0.2 | 1 | 26 | 28.9 | 30.4 | 31.9 | 1 | 40.9 | 14.9 | 0.600 | 53.5 | 75 | 0.288 | 9.7 | |
| SMA6J28A/CA | 0.2 | 1 | 28 | 31.1 | 32.7 | 34.4 | 1 | 44.0 | 13.8 | 0.697 | 59 | 68 | 0.363 | 9.8 | |
| SMA6J33A/CA | 0.2 | 1 | 33 | 36.7 | 38.6 | 40.6 | 1 | 51.9 | 11.8 | 0.963 | 69 | 57 | 0.512 | 10.0 | |
| SMA6J40A/CA | 0.2 | 1 | 40 | 44.4 | 46.7 | 49.1 | 1 | 62.8 | 9.7 | 1.42 | 84 | 48 | 0.728 | 10.1 | |
| SMA6J48A/CA | 0.2 | 1 | 48 | 53.3 | 56.1 | 58.9 | 1 | 75.4 | 8.1 | 2.04 | 100 | 40 | 1.03 | 10.3 | |
| SMA6J58A/CA | 0.2 | 1 | 58 | 64.4 | 67.8 | 71.2 | 1 | 91.1 | 6.7 | 2.97 | 121 | 33 | 1.51 | 10.4 | |
| SMA6J70A/CA | 0.2 | 1 | 70 | 77.8 | 81.9 | 86.0 | 1 | 110 | 5.5 | 4.38 | 146 | 27 | 2.22 | 10.5 | |
| SMA6J85A/CA | 0.2 | 1 | 85 | 94 | 99 | 104 | 1 | 134 | 4.6 | 6.45 | 178 | 22.5 | 3.29 | 10.6 | |
| SMA6J100A/CA | 0.2 | 1 | 100 | 111 | 117 | 123 | 1 | 157 | 3.8 | 9.03 | 212 | 19 | 4.69 | 10.7 | |
| SMA6J130A/CA | 0.2 | 1 | 130 | 144 | 152 | 159 | 1 | 204 | 3 | 14.9 | 265 | 15 | 7.03 | 10.8 | |
| SMA6J154A/CA | 0.2 | 1 | 154 | 171 | 180 | 189 | 1 | 242 | 2.4 | 22.1 | 317 | 12.6 | 10.2 | 10.8 | |
| SMA6J170A/CA | 0.2 | 1 | 170 | 189 | 199 | 209 | 1 | 275 | 2.2 | 30.0 | 353 | 11.3 | 12.7 | 10.8 | |
| SMA6J188A/CA | 0.2 | 1 | 188 | 209 | 220 | 231 | 1 | 328 | 2 | 48.5 | 388 | 10.3 | 15.2 | 10.8 | |

1. Pulse test: $t_p < 50\text{ms}$.

2. To calculate maximum clamping voltage at other surge currents, use the following formula

$$V_{CLmax} = R_D \times I_{PP} + V_{BRmax}$$

3. To calculate V_{BR} versus junction temperature, use the following formula:

$$V_{BR} @ T_j = V_{BR} @ 25^{\circ}\text{C} \times (1 + \alpha T \times (T_j - 25))$$

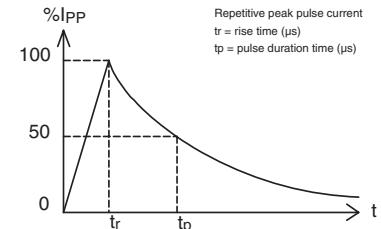


Figure 1. Peak power dissipation versus initial junction temperature

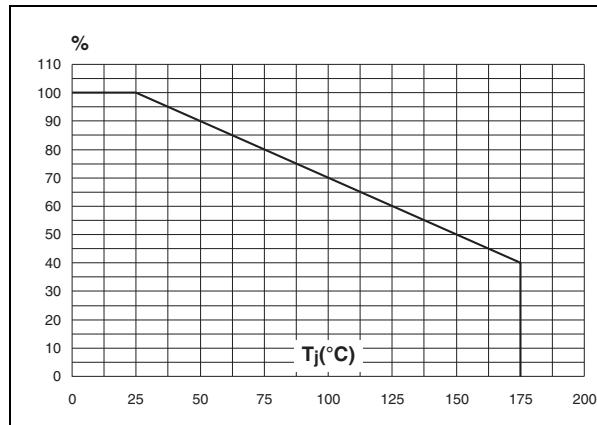


Figure 2. Peak pulse power versus exponential pulse duration (T_j initial = 25 °C)

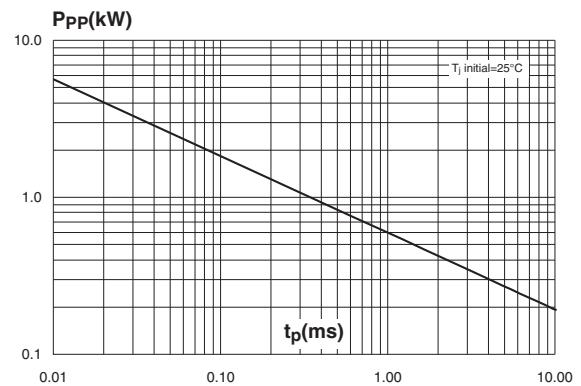


Figure 3. Clamping voltage versus peak pulse current (exponential waveform, maximum values)

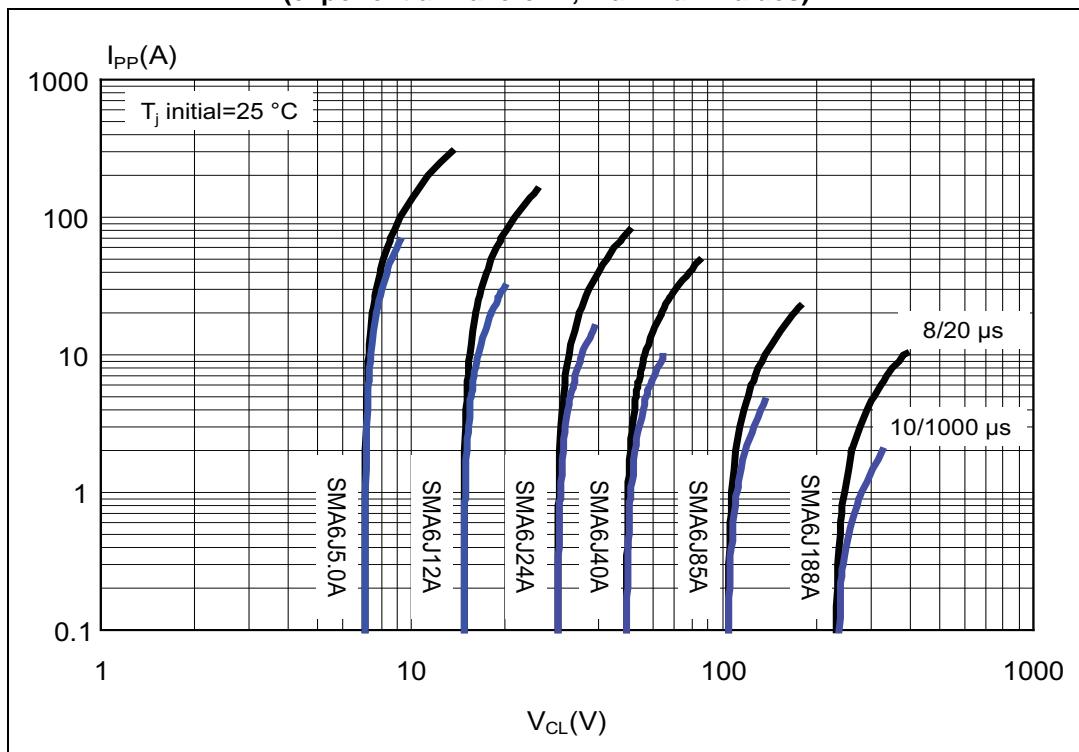


Figure 4. Junction capacitance versus reverse applied voltage (typical values) (SMA6JxxA)

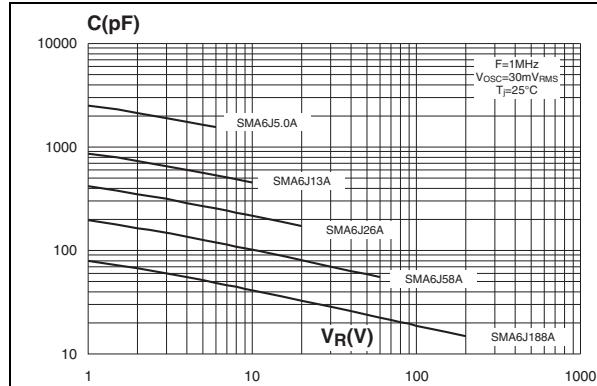


Figure 6. Peak forward voltage drop versus peak forward current (typical values)

Figure 5. Junction capacitance versus reverse applied voltage (typical values) (SMA6JxxCA)

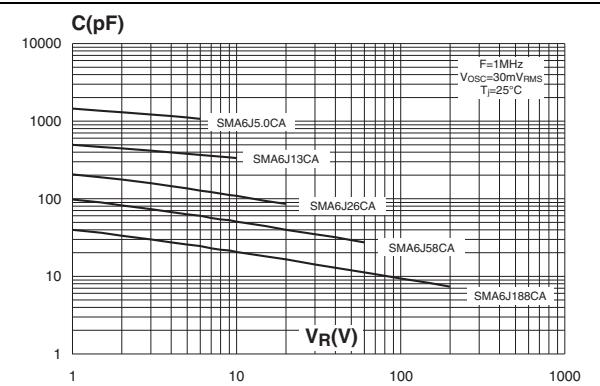


Figure 7. Relative variation of thermal impedance junction to ambient versus pulse duration (printed circuit board FR4, $S_{Cu} = 1 \text{ cm}^2$)

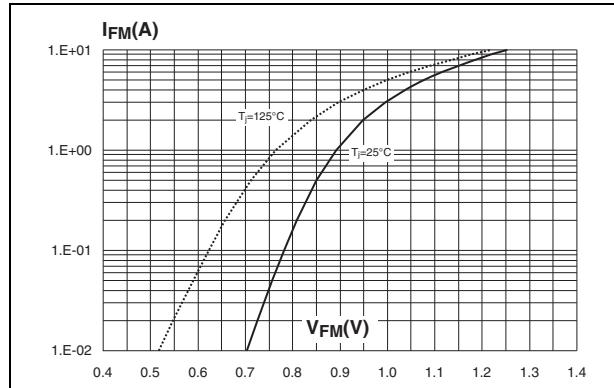


Figure 8. Thermal resistance junction to ambient versus copper surface under each lead (printed circuit board FR4, $e_{Cu} = 35 \mu\text{m}$)




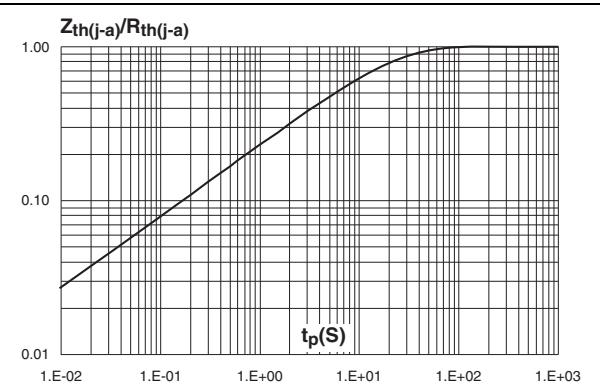


Figure 9. Leakage current versus junction temperature (typical values)

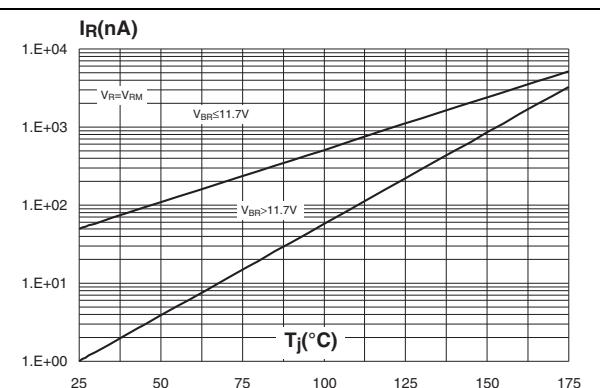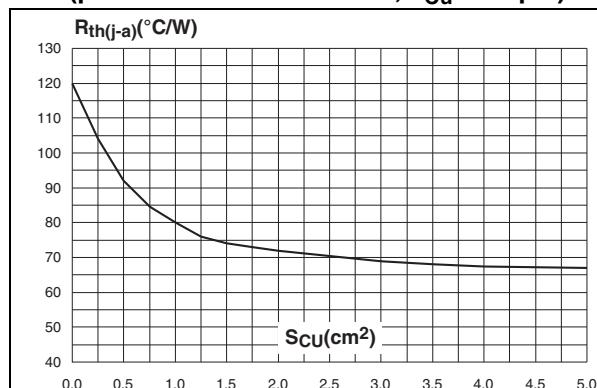

2 Ordering information scheme

Figure 10. Ordering information scheme

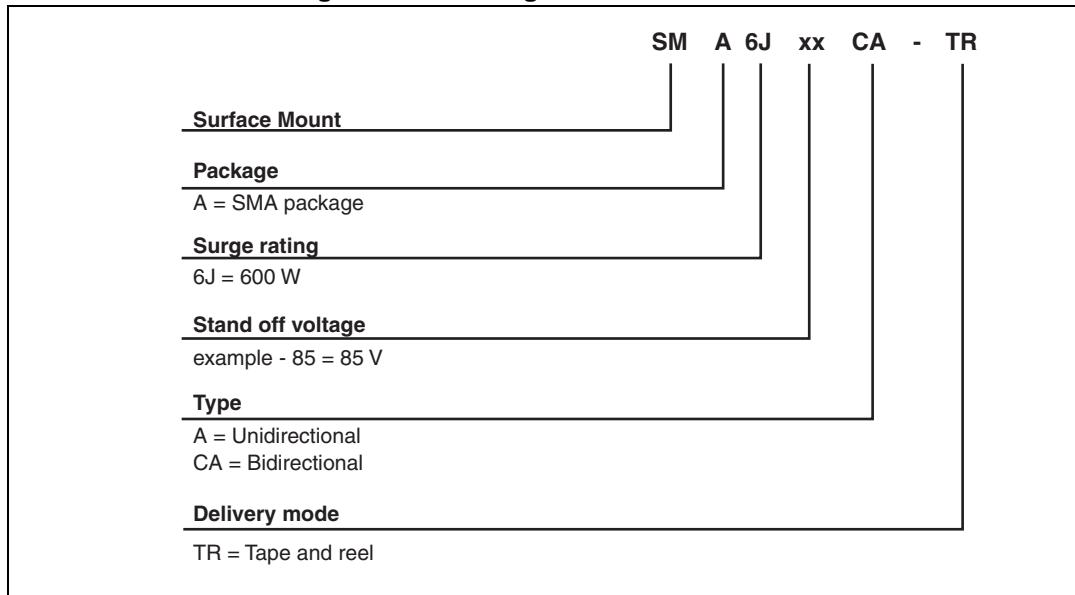

3 Package information

- Case: JEDEC DO-214AC molded plastic over Planar junction
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: For unidirectional types the band indicates cathode.
- Flammability: Epoxy is rated UL94V-0
- RoHS package

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

Table 5. SMA dimensions

| Ref. | Dimensions | | | |
|------|-------------|------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A1 | 1.90 | 2.03 | 0.075 | 0.08 |
| A2 | 0.05 | 0.20 | 0.002 | 0.008 |
| b | 1.25 | 1.65 | 0.049 | 0.065 |
| c | 0.15 | 0.40 | 0.006 | 0.016 |
| D | 2.25 | 2.90 | 0.089 | 0.114 |
| E | 4.80 | 5.35 | 0.189 | 0.211 |
| E1 | 3.95 | 4.60 | 0.156 | 0.181 |
| L | 0.75 | 1.50 | 0.030 | 0.059 |

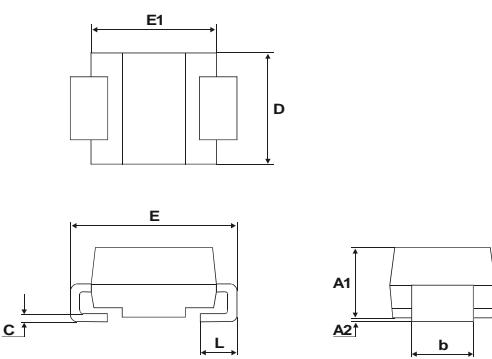


Figure 11. SMA footprint dimensions

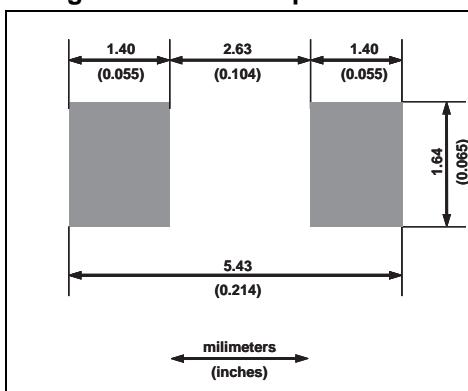


Figure 12. Marking information

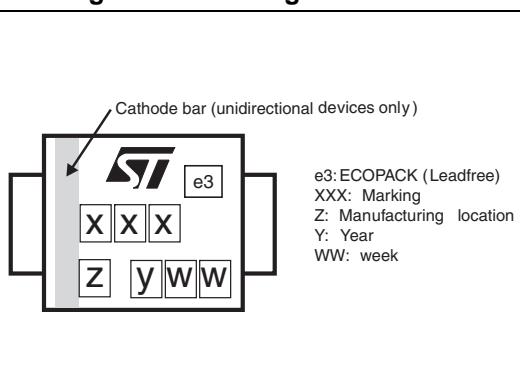


Table 6. Marking

| Type | Marking | Type | Marking |
|--------------|---------|---------------|---------|
| SMA6J5.0A-TR | 6UA | SMA6J5.0CA-TR | 6BA |
| SMA6J6.0A-TR | 6UB | SMA6J6.0CA-TR | 6BB |
| SMA6J6.5A-TR | 6UC | SMA6J6.5CA-TR | 6BC |
| SMA6J8.5A-TR | 6UD | SMA6J8.5CA-TR | 6BD |
| SMA6J10A-TR | 6UE | SMA6J10CA-TR | 6BE |
| SMA6J12A-TR | 6UF | SMA6J12CA-TR | 6BF |
| SMA6J13A-TR | 6UG | SMA6J13CA-TR | 6BG |
| SMA6J15A-TR | 6UH | SMA6J15CA-TR | 6BH |
| SMA6J18A-TR | 6UJ | SMA6J18CA-TR | 6BJ |
| SMA6J20A-TR | 6UK | SMA6J20CA-TR | 6BK |
| SMA6J24A-TR | 6UM | SMA6J24CA-TR | 6BM |
| SMA6J26A-TR | 6UN | SMA6J26CA-TR | 6BN |
| SMA6J28A-TR | 6UO | SMA6J28CA-TR | 6BO |
| SMA6J33A-TR | 6UQ | SMA6J33CA-TR | 6BQ |
| SMA6J40A-TR | 6UR | SMA6J40CA-TR | 6BR |
| SMA6J48A-TR | 6US | SMA6J48CA-TR | 6BS |
| SMA6J58A-TR | 6UT | SMA6J58CA-TR | 6BT |
| SMA6J70A-TR | 6UU | SMA6J70CA-TR | 6BU |
| SMA6J85A-TR | 6UV | SMA6J85CA-TR | 6BV |
| SMA6J100A-TR | 6UW | SMA6J100CA-TR | 6BW |
| SMA6J130A-TR | 6UX | SMA6J130CA-TR | 6BX |
| SMA6J154A-TR | 6UY | SMA6J154CA-TR | 6BY |
| SMA6J170A-TR | 6UZ | SMA6J170CA-TR | 6BZ |
| SMA6J188A-TR | 6UAA | SMA6J188CA-TR | 6BAA |

4 Ordering information

Table 7. Ordering information

| Order code ⁽¹⁾ | Marking | Package | Weight | Base qty | Delivery mode |
|---------------------------|------------------------------|---------|---------|----------|---------------|
| SMA6JxxA-TR | See Table 6. | SMA | 0.072 g | 5000 | Tape and reel |
| SMA6JxxCA-TR | See Table 6. | SMA | 0.072 g | 5000 | Tape and reel |

1. xx indicates stand-off voltage

5 Revision history

Table 8. Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 21-Feb-2007 | 1 | First issue. |
| 07-Nov-2007 | 2 | Updated Description. Improved readability of Ordering information scheme. Reformatted to current standards. |
| 04-Aug-2014 | 3 | Updated weight in Table 7. |
| 28-Oct-2015 | 4 | Updated Table 4 and Figure 3. |
| 4-Jul-2017 | 5 | Updated Table 4 . |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved