

# ES3ABF THRU ES3JBF

### Surface Mount Superfast Recovery Rectifier

Reverse Voltage -50 to 600 V Forward Current -3 A

## FEATURES


- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Superfast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

#### • Case: SMBF

- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 57mg / 0.002oz

### **Absolute Maximum Ratings and Characteristics**



Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	ES3ABF	ES3BF	ES3CBF	ES3DBF	ES3EBF	ES3GBF	ES3JBF	Units
Maximum Repetitive Peak Reverse Voltage	$V_{\text{RRM}}$	50	100	150	200	300	400	600	V
Maximum RMS voltage	$V_{\text{RMS}}$	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	VDC	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current at ⊤∟= 100 °C	I <sub>F(AV)</sub>			•	3				А
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>	100					А		
Maximum Forward Voltage at 3A	VF	1 1.25 1.68						1.68	V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta =125 °C	I <sub>R</sub>				5 100				μA
Typical Junction Capacitance	Cj	45							рF
Maximum Reverse Recovery Time at I <sub>F</sub> =0.5A, I <sub>R</sub> =1A, I <sub>rr</sub> =0.25A	t <sub>rr</sub>	35							ns
Typical Thermal Resistance <sup>2)</sup>	$R_{\text{eja}}$	55							°C/W
Operating and Storage Temperature Range	$T_{j},T_{stg}$	-55 ~ +150							°C

1 ) Measured with IF = 0.5 A, IR = 1 A, Irr = 0.25 A 2 ) P.C.B. mounted with 0.5 X 0.5" (12.7 X 12.7 mm) copper pad areas.


SHIKE MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE






# ES3ABF THRU ES3JBF




#### Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram










SHIKE MAKE CONSCIOUS PRODUCT CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

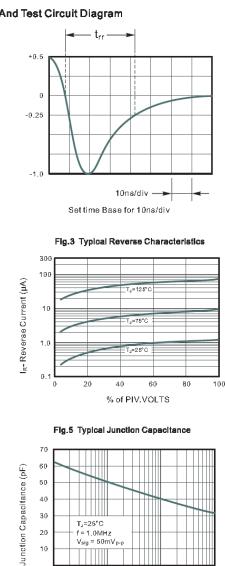

Reverse Voltage (V)

10

100

0.1







# ES3ABF THRU ES3JBF

## PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SMBF

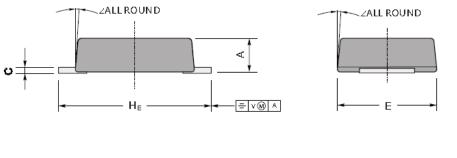








Bottom View

UNIT		А	С	D	Е	Η <sub>ε</sub>	е	g	Z
mm	max	1.3	0.26	4.4	3.7	5.5	2.2	1.0	9°
	min	1.1	0.18	4.2	3.5	5.1	1.9	1.0	
mil	max	51	10	173	146	216	86	40	
	min	43	7	165	138	200	75	40	

### The recommended mounting pad size



#### Marking

Type number	Marking code
ES3ABF	E3AB
ES3BBF	E3BB
ES3CBF	E3CB
ES3DBF	E3DB
ES3EBF	E3EB
ES3GBF	E3GB
ES3JBF	E3JB

SHIKE MAKE CONSCIOUS PRODUCT CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

