INDUCTORS

⊗TDK

Inductors for decoupling circuits Multilayer ferrite MLZ series



MLZ1005 type



FEATURES

- O The MLZ series include inductors for decoupling circuits that have top-class DC superimposition characteristics and low DC resistance.
- \bigcirc They are compatible with wide frequency band noise, from low to high frequency.
- W type products are the new standard type products that have both large current and low resistance.
- Operating temperature range: -55 to +125°C (including self-temperature rise)

APPLICATION

Smart phones, tablet terminals, note PCs, various modules such as camera modules, DSCs, video games, portable memory audio devices, navigation systems, PNDs, WLANs, SSDs

O Application guides: Smart phones/tablets

PART NUMBER CONSTRUCTION

MLZ	1005	Μ	R47	W	T	000
Series name	L×W×H dimensions 1.0×0.5×0.5 mm	Product internal code	Inductance (µH)	Characteristic type	Packaging style	Internal code

CHARACTERISTICS SPECIFICATION TABLE

Туре	L		L measuring conditions		DC resistance	Isat*1	Itemp*2	Part No.
			Frequency	Current				
	(µH)	Tolerance	(MHz)	(mA)	(Ω)±30%	(mA)	(mA)	
	0.47	±20%	2	0.1	0.20	120	500	MLZ1005MR47WT000
Lavera	0.68	±20%	2	0.1	0.30	110	450	MLZ1005MR68WT000
Large current	1.00	±20%	2	0.1	0.35	100	450	MLZ1005M1R0WT000
current	1.50	±20%	2	0.1	0.50	80	350	MLZ1005M1R5WT000
	2.20	±20%	2	0.1	0.55	60	350	MLZ1005M2R2WT000

*1 Current assumed when inductance ratio has decreased by 50% max..

*2 Current assumed when temperature has risen to 20°C max. (reference value). Operating temperature environment at this time: 105°C max.

Measurement equipment


Measurement item	Product No.	Manufacturer
L	4294A+16034G	Keysight Technologies
DC resistance	Type-7561	Yokogawa

* Equivalent measurement equipment may be used.



MLZ1005 type


L FREQUENCY CHARACTERISTICS

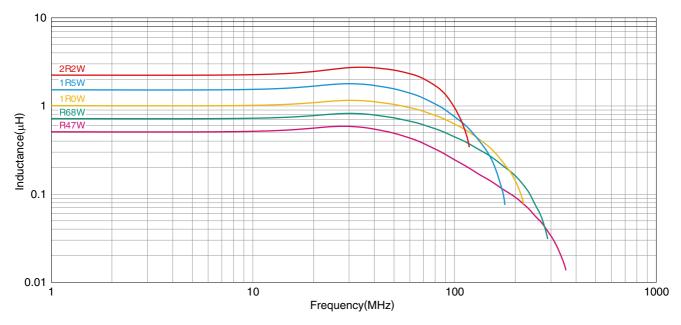

Measurement equipment

Product No.	Manufacturer	
E4991A+16192A	Keysight Technologies	
* Equivalent measurement equipment may be used.		

■ INDUCTANCE VS. DC BIAS CHARACTERISTICS

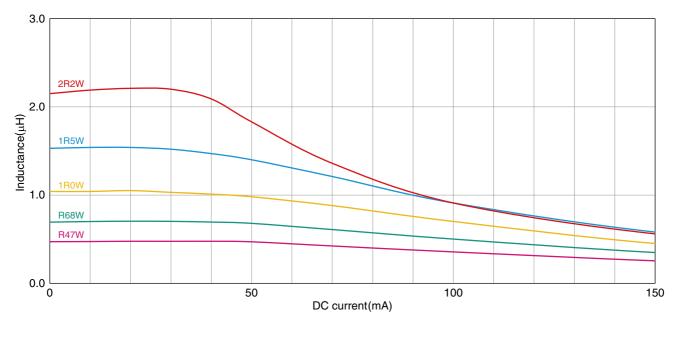


Measurement equipment			
Product No.	Manufacturer		
4291B+16200A+16192A	Keysight Technologies		

* Equivalent measurement equipment may be used.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (2/5) Please note that the contents may change without any prior notice due to reasons such as upgrading.

MLZ1005 type

■ IMPEDANCE VS. FREQUENCY CHARACTERISTICS

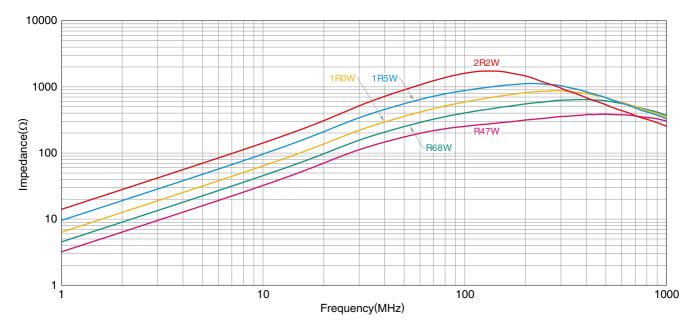

Measurement equipment


Product No.	Manufacturer		
E4991A+16192A	Keysight Technologies		
* Equivalent measurement equinment may be used			

quivalent measurement equipment may be used.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (3/5) 20181207


MLZ1005 type

SHAPE & DIMENSIONS




Dimensions in mm


PACKAGING STYLE

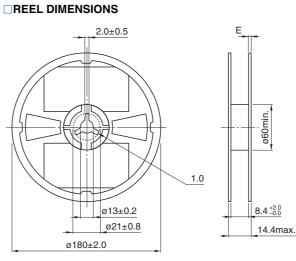


Dimensions in mm

TAPE DIMENSIONS

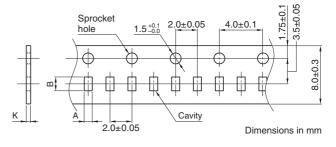



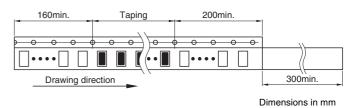

PACKAGE QUANTITY

Package quantity 10000 pcs/reel


TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating	Storage	Individual
temperature range*	temperature range**	weight
–55 to +125 °C	–55 to +125 °C	1.2 mg
* • · · ·		

* Operating temperature range includes self-temperature rise.


** The storage temperature range is for after the assembly.

RECOMMENDED LAND PATTERN



Dimensions in mm

RECOMMENDED REFLOW PROFILE

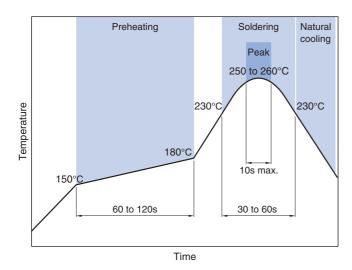

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (4/5) Please note that the contents may change without any prior notice due to reasons such as upgrading.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

 The storage period is less than 12 months. Be sure to follow the storage less). If the storage period elapses, the soldering of the terminal electrodes may 				
\bigcirc Do not use or store in locations where there are conditions such as gas	corrosion (salt, acid, alkali, etc.).			
 Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference does not exceed 150°C. 	erence between the solder temperature and chip temperature			
Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.				
When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.				
 Self heating (temperature increase) occurs when the power is turned of design. 	ON, so the tolerance should be sufficient for the set thermal			
 Carefully lay out the coil for the circuit board design of the non-magnetic A malfunction may occur due to magnetic interference. 	shield type.			
\bigcirc Use a wrist band to discharge static electricity in your body through the g	grounding wire.			
\bigcirc Do not expose the products to magnets or magnetic fields.				
\bigcirc Do not use for a purpose outside of the contents regulated in the delivery	y specifications.			
 The products listed on this catalog are intended for use in general electment, home appliances, amusement equipment, computer equipment, ment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of ity require a more stringent level of safety or reliability, or whose failure, reperson or property. If you intend to use the products in the applications listed below or if you set forth in the each catalog, please contact us. 	personal equipment, office equipment, measurement equip- the applications listed below, whose performance and/or qual- malfunction or trouble could cause serious damage to society,			
(2) Transportation equipment (cars, electric trains, ships, etc.)(9(3) Medical equipment(1(4) Power-generation control equipment(1(5) Atomic energy-related equipment(1	 a) Public information-processing equipment b) Military equipment c) Electric heating apparatus, burning equipment c) Electric heating apparatus, burning equipment c) Disaster prevention/crime prevention equipment c) Safety equipment c) Other applications that are not considered general-purpose applications u are kindly requested to take into consideration securing pro- 			

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (5/5) Please note that the contents may change without any prior notice due to reasons such as upgrading.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK:

<u>MLZ1005MR47W</u> <u>MLZ1005MR68W</u> <u>MLZ1005M1R0W</u> <u>MLZ1005M1R5W</u> <u>MLZ1005M2R2W</u> <u>MLZ1005M2R2WT000</u> <u>MLZ1005M1R0WT000</u> <u>MLZ1005MR68WT000</u> <u>MLZ1005MR47WT000</u> <u>MLZ1005M1R5WT000</u>