
SCLS395L-APRIL 1998-REVISED AUGUST 2005

#### **FEATURES**

- 2-V to 5.5-V V<sub>CC</sub> Operation
- Max t<sub>pd</sub> of 9.5 ns at 5 V
- Typical V<sub>OLP</sub> (Output Ground Bounce)
   <0.8 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Typical V<sub>OHV</sub> (Output V<sub>OH</sub> Undershoot)
   >2.3 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Support Mixed-Mode Voltage Operation on All Ports
- I<sub>off</sub> Supports Partial-Power-Down Mode Operation
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

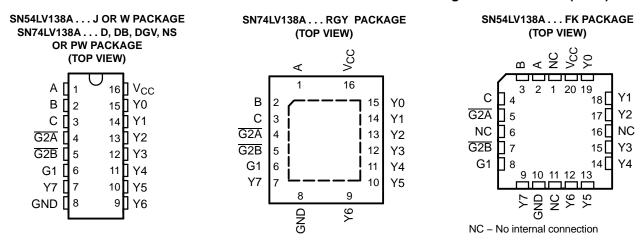

### **DESCRIPTION/ORDERING INFORMATION**

The 'LV138A devices are 3-line to 8-line decoders/demultiplexers designed for 2-V to 5.5-V V<sub>CC</sub> operation.

#### ORDERING INFORMATION

T <sub>A</sub>	PAC	CKAGE <sup>(1)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	QFN – RGY	Reel of 1000	SN74LV138ARGYR	LV138A
	SOIC - D	Tube of 40	SN74LV138AD	1.1/4204
	30IC - D	Reel of 2500	SN74LV138ADR	
	SOP - NS	Reel of 2000	SN74LV138ANSR	74LV138A
–40°C to 85°C	SSOP - DB	Reel of 2000	SN74LV138ADBR	LV138A
		Tube of 90	SN74LV138APW	
	TSSOP - PW	Reel of 2000	SN74LV138APWR	LV138A
		Reel of 250	SN74LV138APWT	
	TVSOP - DGV	Reel of 2000	SN74LV138ADGVR	LV138A
	CDIP – J	Tube of 25	SNJ54LV138AJ	SNJ54LV138AJ
–55°C to 125°C	CFP – W	Tube of 150	SNJ54LV138AW	SNJ54LV138AW
	LCCC – FK	Tube of 55	SNJ54LV138AFK	SNJ54LV138AFK

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

## SN54LV138A, SN74LV138A 3-LINE TO 8-LINE DECODERS/DEMULTIPLEXERS

SCLS395L-APRIL 1998-REVISED AUGUST 2005



## **DESCRIPTION/ORDERING INFORMATION (CONTINUED)**

These devices are designed for high-performance memory-decoding or data-routing applications requiring very short propagation delay times. In high-performance memory systems, these decoders can be used to minimize the effects of system decoding. When employed with high-speed memories utilizing a fast enable circuit, the delay times of these decoders and the enable time of the memory usually are less than the typical access time of the memory. This means that the effective system delay introduced by the decoder is negligible.

The conditions at the binary-select inputs (A, B, C) and the three enable inputs (G1,  $\overline{G2A}$ ,  $\overline{G2B}$ ) select one of eight output lines. The two active-low ( $\overline{G2A}$ ,  $\overline{G2B}$ ) and one active-high (G1) enable inputs reduce the need for external gates or inverters when expanding. A 24-line decoder can be implemented without external inverters and a 32-line decoder requires only one inverter. An enable input can be used as a data input for demultiplexing applications.


These devices are fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs, preventing damaging current backflow through the devices when they are powered down.

#### **FUNCTION TABLE**

ENA	BLE IN	PUTS	SELI	ECT INF	PUTS	OUTPUTS							
G1	G2A	G2B	С	В	Α	Y0	Y1	Y20	Y3	Y4	Y5	Y6	Y7
Х	Н	Χ	Х	Χ	Х	Н	Н	Н	Н	Н	Н	Н	Н
Χ	Χ	Н	Χ	Χ	Χ	Н	Н	Н	Н	Н	Н	Н	Н
L	Χ	Χ	Χ	Χ	Χ	Н	Н	Н	Н	Н	Н	Н	Н
Н	L	L	L	L	L	L	Н	Н	Н	Н	Н	Н	Н
Н	L	L	L	L	Н	Н	L	Н	Н	Н	Н	Н	Н
Н	L	L	L	Н	L	Н	Н	L	Н	Н	Н	Н	Н
Н	L	L	L	Н	Н	Н	Н	Н	L	Н	Н	Н	Н
Н	L	L	Н	L	L	Н	Н	Н	Н	L	Н	Н	Н
Н	L	L	Н	L	Н	Н	Н	Н	Н	Н	L	Н	Н
Н	L	L	Н	Н	L	Н	Н	Н	Н	Н	Н	L	Н
Н	L	L	Н	Н	Н	Н	Н	Н	Н	Н	Н	Н	L



## **LOGIC DIAGRAM (POSITIVE LOGIC)**

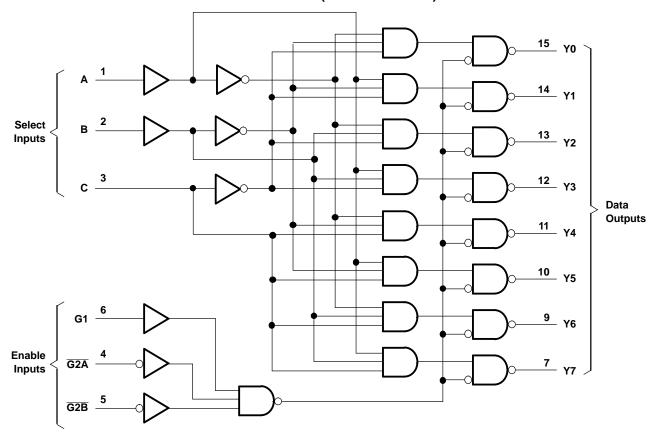

Pin numbers shown are for the D, DB, DGV, J, NS, PW, RGY, and W packages.

# SN54LV138A, SN74LV138A 3-LINE TO 8-LINE DECODERS/DEMULTIPLEXERS

SCLS395L-APRIL 1998-REVISED AUGUST 2005



# Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage range		-0.5	7	V
VI	Input voltage range <sup>(2)</sup>		-0.5	7	V
Vo	Voltage range applied to any output in the	high-impedance or power-off state <sup>(2)</sup>	-0.5	7	V
Vo	Output voltage range <sup>(2)(3)</sup>		-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-20	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		-50	mA
Io	Continuous output current	$V_O = 0$ to $V_{CC}$		±25	mA
	Continuous current through V <sub>CC</sub> or GND			±50	mA
		D package <sup>(4)</sup>		73	
		DB package <sup>(4)</sup>		82	
0	Deales as the sweet insured as	DGV package <sup>(4)</sup>		120	0000
$\theta_{\sf JA}$	Package thermal impedance	NS package <sup>(4)</sup>		64	°C/W
		PW package <sup>(4)</sup>		108	
		RGY package <sup>(5)</sup>		39	
T <sub>stg</sub>	Storage temperature range		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

<sup>2)</sup> The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(3)</sup> This value is limited to 5.5 V maximum.

<sup>4)</sup> The package thermal impedance is calculated in accordance with JESD 51-7

<sup>(5)</sup> The package thermal impedance is calculated in accordance with JESD 51-5.

SCLS395L-APRIL 1998-REVISED AUGUST 2005

# Recommended Operating Conditions<sup>(1)</sup>

			SN54LV1	38A <sup>(2)</sup>	SN74L	.V138A	LINUT
			MIN	MAX	MIN	MAX	UNIT
$V_{CC}$	Supply voltage		2	5.5	2	5.5	V
		V <sub>CC</sub> = 2 V	1.5		1.5		
	High level input valtage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	$V_{CC} \times 0.7$		$V_{CC} \times 0.7$		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 3 V to 3.6 V	$V_{CC} \times 0.7$		$V_{CC} \times 0.7$		\ \ \
		V <sub>CC</sub> = 4.5 V to 5.5 V	$V_{CC} \times 0.7$		$V_{CC} \times 0.7$		
		V <sub>CC</sub> = 2 V		0.5		0.5	
\/	Low lovel input veltage	$V_{CC}$ = 2.3 V to 2.7 V		$V_{CC} \times 0.3$		$V_{CC} \times 0.3$	V
$V_{IL}$	Low-level input voltage	$V_{CC}$ = 3 V to 3.6 V		$V_{CC} \times 0.3$		$V_{CC} \times 0.3$	
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		$V_{CC} \times 0.3$		$V_{CC} \times 0.3$	
VI	Input voltage		0	5.5	0	5.5	V
$V_{O}$	Output voltage		0	V <sub>CC</sub>	0	$V_{CC}$	V
		V <sub>CC</sub> = 2 V		-50		-50	μΑ
	High lovel output current	$V_{CC}$ = 2.3 V to 2.7 V		-2		-2	
I <sub>OH</sub>	High-level output current	$V_{CC}$ = 3 V to 3.6 V		-6		-6	mA
		V <sub>CC</sub> = 4.5 V to 5.5 V		-12		-12	
		V <sub>CC</sub> = 2 V		50		50	μΑ
	Low-level output current	$V_{CC}$ = 2.3 V to 2.7 V		2		2	
I <sub>OL</sub>	Low-level output current	$V_{CC}$ = 3 V to 3.6 V		6		6	mA
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		12		12	
		V <sub>CC</sub> = 2.3 V to 2.7 V		200		200	
Δt/Δν	Input transition rise or fall rate	V <sub>CC</sub> = 3 V to 3.6 V		100		100	ns/V
		V <sub>CC</sub> = 4.5 V to 5.5 V		20		20	
T <sub>A</sub>	Operating free-air temperature		-55	125	-40	85	°C

All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004. Product Preview

## **Electrical Characteristics**

over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST CONDITIONS	V	SN54LV138A <sup>(1)</sup>	SN74LV138A	UNIT
PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN TYP MAX	MIN TYP MAX	UNII
	I <sub>OH</sub> = -50 μA	2 V to 5.5 V	V <sub>CC</sub> - 0.1	V <sub>CC</sub> - 0.1	
V	$I_{OH} = -2 \text{ mA}$	2.3 V	2	2	V
$V_{OH}$	I <sub>OH</sub> = -6 mA	3 V	2.48	2.48	V
	$I_{OH} = -12 \text{ mA}$	4.5 V	3.8	3.8	
	I <sub>OL</sub> = 50 μA	2 V to 5.5 V	0.1	0.1	
V	I <sub>OL</sub> = 2 mA	2.3 V	0.4	0.4	V
$V_{OL}$	I <sub>OL</sub> = 6 mA	3 V	0.44	0.44	V
	I <sub>OL</sub> = 12 mA	4.5 V	0.55	0.55	
l <sub>l</sub>	V <sub>I</sub> = 5.5 V or GND	0 to 5.5 V	±1	±1	μΑ
I <sub>cc</sub>	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V	20	20	μΑ
I <sub>off</sub>	$V_I$ or $V_O = 0$ to 5.5 V	0	5	5	μΑ
C <sub>i</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	3.3 V	2.1	2.1	pF

<sup>(1)</sup> Product Preview

# SN54LV138A, SN74LV138A 3-LINE TO 8-LINE DECODERS/DEMULTIPLEXERS

SCLS395L-APRIL 1998-REVISED AUGUST 2005



#### **Switching Characteristics**

over recommended operating free-air temperature range,  $V_{CC}$  = 2.5 V  $\pm$  0.2 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	ТО	LOAD	LOAD $T_A = 25^{\circ}C$		O	SN54LV1	38A <sup>(1)</sup>	SN74LV138A		UNIT
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
	A, B, or C				11.7 <sup>(2)</sup>	17.6 <sup>(2)</sup>	1 (2)	21 <sup>(2)</sup>	1	21	
t <sub>pd</sub>	G1	Υ	$C_{L} = 15 \text{ pF}$		12.3 <sup>(2)</sup>	19.2 <sup>(2)</sup>	1 (2)	22(2)	1	22	ns
	G2A or G2B				11.4 <sup>(2)</sup>	18.2 <sup>(2)</sup>	1 (2)	21 <sup>(2)</sup>	1	21	
	A, B, or C				14.9	21.4	1	25	1	25	
t <sub>pd</sub>	G1	Υ	$C_L = 50 pF$		15.7	22.6	1	26	1	26	ns
	G2A or G2B				14.8	22	1	25	1	25	

<sup>(1)</sup> Product Preview

## **Switching Characteristics**

over recommended operating free-air temperature range,  $V_{CC}$  = 3.3 V  $\pm$  0.3 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD CAPACITANCE		T <sub>A</sub> = 25°C			138A <sup>(1)</sup>	SN74LV138A		UNIT
PARAMETER	(INPUT)	(OUTPUT)		MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNII
	A, B, or C				8.1 <sup>(2)</sup>	11.4 <sup>(2)</sup>	1 (2)	13.5 <sup>(2)</sup>	1	13.5	
t <sub>pd</sub>	G1	Υ	$C_{L} = 15 \text{ pF}$		8.4(2)	12.8 <sup>(2)</sup>	1 (2)	15 <sup>(2)</sup>	1	15	ns
	G2A or G2B				7.8(2)	11.4 <sup>(2)</sup>	1 (2)	13.5 <sup>(2)</sup>	1	13.5	
	A, B, or C				10.3	15.8	1	18	1	18	
t <sub>pd</sub>	G1	Y	$C_L = 50 pF$		10.6	16.3	1	18.5	1	18.5	ns
	G2A or G2B				10	14.9	1	17	1	17	

<sup>(1)</sup> Product Preview

### **Switching Characteristics**

over recommended operating free-air temperature range,  $V_{CC}$  = 5 V  $\pm$  0.5 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD	LOAD T <sub>A</sub> = 25		;	SN54LV138A <sup>(1)</sup>		SN74LV138A		UNIT
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
	A, B, or C				5.6 <sup>(2)</sup>	8.1 <sup>(2)</sup>	1 (2)	9.5 <sup>(2)</sup>	1	9.5	
t <sub>pd</sub>	G1	Υ	$C_{L} = 15 pF$		5.7 <sup>(2)</sup>	8.1 <sup>(2)</sup>	1 (2)	9.5 <sup>(2)</sup>	1	9.5	ns
	G2A or G2B				5.4 <sup>(2)</sup>	8.1 (2)	1 (2)	9.5(2)	1	9.5	
	A, B, or C				7	10.1	1	11.5	1	11.5	
t <sub>pd</sub>	G1	Υ	$C_L = 50 pF$		7.1	10.1	1	11.5	1	11.5	ns
P.0	G2A or G2B				6.8	10.1	1	11.5	1	11.5	

<sup>(1)</sup> Product Preview

### **Operating Characteristics**

 $T_A = 25^{\circ}C$ 

	PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	TYP	UNIT
_	Dower dissination conscitons	C 50 °F 6 40 MHz	3.3 V	16.8	~ F
Cpd	Power dissipation capacitance	$C_L = 50 \text{ pF},  f = 10 \text{ MHz}$	5 V	19.1	рF


<sup>(2)</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

<sup>(2)</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

<sup>(2)</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.



#### PARAMETER MEASUREMENT INFORMATION

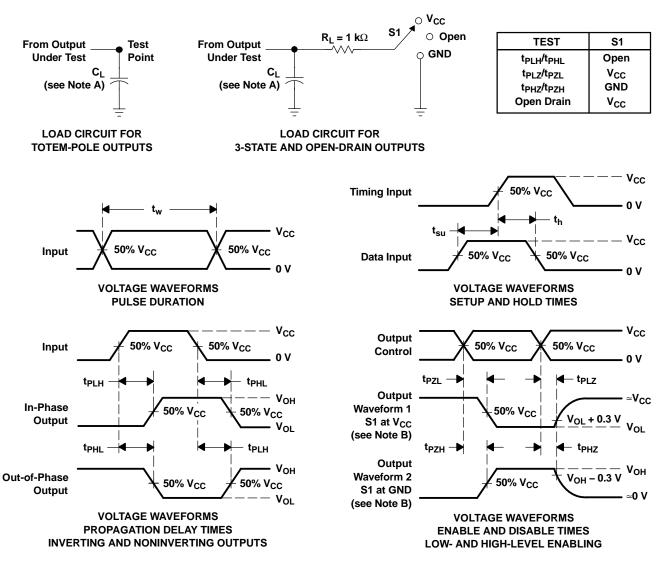

- NOTES: A. C<sub>L</sub> includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_r \leq$  3 ns,  $t_f \leq$  3 ns.
  - D. The outputs are measured one at a time, with one input transition per measurement.
  - E. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dis</sub>.
  - F. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
  - G. t<sub>PHL</sub> and t<sub>PLH</sub> are the same as t<sub>pd</sub>.
  - H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuits and Voltage Waveforms





24-Aug-2018

#### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
SN74LV138AD	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV138A	Samples
SN74LV138ADBR	ACTIVE	SSOP	DB	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV138A	Samples
SN74LV138ADGVR	ACTIVE	TVSOP	DGV	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV138A	Samples
SN74LV138ADR	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV138A	Samples
SN74LV138ANSR	ACTIVE	so	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	74LV138A	Samples
SN74LV138APW	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV138A	Samples
SN74LV138APWG4	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV138A	Samples
SN74LV138APWR	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU   CU SN	Level-1-260C-UNLIM	-40 to 85	LV138A	Samples
SN74LV138APWRG4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV138A	Samples
SN74LV138APWT	ACTIVE	TSSOP	PW	16	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	LV138A	Samples
SN74LV138ARGYR	ACTIVE	VQFN	RGY	16	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	LV138A	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".



## PACKAGE OPTION ADDENDUM

24-Aug-2018

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead/Ball Finish Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# PACKAGE MATERIALS INFORMATION

www.ti.com 20-Dec-2018

## TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LV138ADGVR	TVSOP	DGV	16	2000	330.0	12.4	6.8	4.0	1.6	8.0	12.0	Q1
SN74LV138ADR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
SN74LV138ANSR	SO	NS	16	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
SN74LV138APWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LV138APWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LV138APWRG4	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LV138APWT	TSSOP	PW	16	250	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LV138ARGYR	VQFN	RGY	16	3000	330.0	12.4	3.8	4.3	1.5	8.0	12.0	Q1

www.ti.com 20-Dec-2018



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LV138ADGVR	TVSOP	DGV	16	2000	367.0	367.0	35.0
SN74LV138ADR	SOIC	D	16	2500	333.2	345.9	28.6
SN74LV138ANSR	SO	NS	16	2000	367.0	367.0	38.0
SN74LV138APWR	TSSOP	PW	16	2000	367.0	367.0	35.0
SN74LV138APWR	TSSOP	PW	16	2000	364.0	364.0	27.0
SN74LV138APWRG4	TSSOP	PW	16	2000	367.0	367.0	35.0
SN74LV138APWT	TSSOP	PW	16	250	367.0	367.0	35.0
SN74LV138ARGYR	VQFN	RGY	16	3000	367.0	367.0	35.0

## DB (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE

#### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150



NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. QFN (Quad Flatpack No-Lead) package configuration.
- D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
- E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
- Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated. The Pin 1 identifiers are either a molded, marked, or metal feature.
- G. Package complies to JEDEC MO-241 variation BA.



# RGY (R-PVQFN-N16)

### PLASTIC QUAD FLATPACK NO-LEAD

#### THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No—Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.



Bottom View

Exposed Thermal Pad Dimensions

4206353-3/P 03/14

NOTE: All linear dimensions are in millimeters



# RGY (R-PVQFN-N16)

# PLASTIC QUAD FLATPACK NO-LEAD



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat—Pack QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <a href="https://www.ti.com">http://www.ti.com</a>.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- F. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.



# D (R-PDS0-G16)

## PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.



# D (R-PDSO-G16)

# PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.





SMALL OUTLINE PACKAGE



- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



## **MECHANICAL DATA**

# NS (R-PDSO-G\*\*)

# 14-PINS SHOWN

### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



## DGV (R-PDSO-G\*\*)

#### **24 PINS SHOWN**

#### **PLASTIC SMALL-OUTLINE**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.

D. Falls within JEDEC: 24/48 Pins – MO-153 14/16/20/56 Pins – MO-194

#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<a href="www.ti.com/legal/termsofsale.html">www.ti.com/legal/termsofsale.html</a>) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2018, Texas Instruments Incorporated