# Digital Transistors (BRT) R1 = 2.2 k $\Omega$ , R2 = 47 k $\Omega$

# NPN Transistors with Monolithic Bias Resistor Network

This series of digital transistors is designed to replace a single device and its external resistor bias network. The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base–emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

#### **Features**

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

## **MAXIMUM RATINGS** $(T_A = 25^{\circ}C)$

| Rating                         | Symbol               | Max | Unit |
|--------------------------------|----------------------|-----|------|
| Collector-Base Voltage         | $V_{CBO}$            | 50  | Vdc  |
| Collector–Emitter Voltage      | $V_{CEO}$            | 50  | Vdc  |
| Collector Current – Continuous | Ic                   | 100 | mAdc |
| Input Forward Voltage          | $V_{IN(fwd)}$        | 12  | Vdc  |
| Input Reverse Voltage          | V <sub>IN(rev)</sub> | 6   | Vdc  |


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.




## ON Semiconductor®

www.onsemi.com

#### PIN CONNECTIONS



#### **MARKING DIAGRAMS**











SOT-723 CASE 631AA STYLE 1



X M 1

SOT-1123 CASE 524AA STYLE 1

XXX = Specific Device Code

M = Date Code\*

Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

#### **ORDERING INFORMATION**

See detailed ordering, marking, and shipping information in the package dimensions section on page 2 of this data sheet.

**Table 1. ORDERING INFORMATION** 

| Device                         | Part Marking | Package                    | Shipping <sup>†</sup> |
|--------------------------------|--------------|----------------------------|-----------------------|
| MUN2235T1G                     | 6M           | SC-59<br>(Pb-Free)         | 3000 / Tape & Reel    |
| MMUN2235LT1G, NSVMMUN2235LT1G* | AA2          | SOT-23<br>(Pb-Free)        | 3000 / Tape & Reel    |
| MUN5235T1G, SMUN5235T1G*       | 8M           | SC-70/SOT-323<br>(Pb-Free) | 3000 / Tape & Reel    |
| DTC123JET1G, NSVDTC123JET1G*   | 8M           | SC-75<br>(Pb-Free)         | 3000 / Tape & Reel    |
| DTC123JM3T5G, NSVDTC123JM3T5G* | 8M           | SOT-723<br>(Pb-Free)       | 8000 / Tape & Reel    |
| NSBC123JF3T5G                  | V            | SOT-1123<br>(Pb-Free)      | 8000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>\*</sup>S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.




Figure 1. Derating Curve

- (1) SC-75 and SC-70/SOT323; Minimum Pad
- (2) SC-59; Minimum Pad
- (3) SOT-23; Minimum Pad
- (4) SOT-1123; 100 mm<sup>2</sup>, 1 oz. copper trace
- (5) SOT-723; Minimum Pad

**Table 2. THERMAL CHARACTERISTICS** 

| Characteristic                                                 |                                              | Symbol                            | Max                      | Unit        |  |  |  |  |
|----------------------------------------------------------------|----------------------------------------------|-----------------------------------|--------------------------|-------------|--|--|--|--|
| THERMAL CHARACTERISTICS (SC-59) (MUN2235)                      |                                              |                                   |                          |             |  |  |  |  |
| Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C | (Note 1)<br>(Note 2)<br>(Note 1)<br>(Note 2) | P <sub>D</sub>                    | 230<br>338<br>1.8<br>2.7 | mW<br>mW/°C |  |  |  |  |
| Thermal Resistance, Junction to Ambient                        | (Note 1)<br>(Note 2)                         | $R_{	heta JA}$                    | 540<br>370               | °C/W        |  |  |  |  |
| Thermal Resistance,<br>Junction to Lead                        | (Note 1)<br>(Note 2)                         | $R_{	hetaJL}$                     | 264<br>287               | °C/W        |  |  |  |  |
| Junction and Storage Temperature Range                         |                                              | T <sub>J</sub> , T <sub>stg</sub> | -55 to +150              | °C          |  |  |  |  |
| THERMAL CHARACTERISTICS (SOT-23) (MMUN2235L)                   |                                              |                                   |                          |             |  |  |  |  |
| Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C | (Note 1)<br>(Note 2)<br>(Note 1)<br>(Note 2) | P <sub>D</sub>                    | 246<br>400<br>2.0<br>3.2 | mW<br>mW/°C |  |  |  |  |
| Thermal Resistance,<br>Junction to Ambient                     | (Note 1)<br>(Note 2)                         | $R_{	hetaJA}$                     | 508<br>311               | °C/W        |  |  |  |  |
| Thermal Resistance,<br>Junction to Lead                        | (Note 1)<br>(Note 2)                         | $R_{	hetaJL}$                     | 174<br>208               | °C/W        |  |  |  |  |
| Junction and Storage Temperature Range                         |                                              | T <sub>J</sub> , T <sub>stg</sub> | -55 to +150              | °C          |  |  |  |  |
| THERMAL CHARACTERISTICS (SC-70/SOT-323) (MUN5235)              |                                              |                                   |                          |             |  |  |  |  |
| Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C | (Note 1)<br>(Note 2)<br>(Note 1)<br>(Note 2) | P <sub>D</sub>                    | 202<br>310<br>1.6<br>2.5 | mW<br>mW/°C |  |  |  |  |
| Thermal Resistance,<br>Junction to Ambient                     | (Note 1)<br>(Note 2)                         | $R_{	heta JA}$                    | 618<br>403               | °C/W        |  |  |  |  |
| Thermal Resistance,<br>Junction to Lead                        | (Note 1)<br>(Note 2)                         | $R_{	hetaJL}$                     | 280<br>332               | °C/W        |  |  |  |  |
| Junction and Storage Temperature Range                         |                                              | T <sub>J</sub> , T <sub>stg</sub> | -55 to +150              | °C          |  |  |  |  |
| THERMAL CHARACTERISTICS (SC-75) (DTC123JE)                     |                                              |                                   |                          |             |  |  |  |  |
| Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C | (Note 1)<br>(Note 2)<br>(Note 1)<br>(Note 2) | P <sub>D</sub>                    | 200<br>300<br>1.6<br>2.4 | mW<br>mW/°C |  |  |  |  |
| Thermal Resistance,<br>Junction to Ambient                     | (Note 1)<br>(Note 2)                         | $R_{	hetaJA}$                     | 600<br>400               | °C/W        |  |  |  |  |
| Junction and Storage Temperature Range                         |                                              | T <sub>J</sub> , T <sub>stg</sub> | -55 to +150              | °C          |  |  |  |  |
| THERMAL CHARACTERISTICS (SOT-723) (DTC123JM3)                  |                                              |                                   |                          |             |  |  |  |  |
| Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C | (Note 1)<br>(Note 2)<br>(Note 1)<br>(Note 2) | P <sub>D</sub>                    | 260<br>600<br>2.0<br>4.8 | mW<br>mW/°C |  |  |  |  |
| Thermal Resistance,<br>Junction to Ambient                     | (Note 1)<br>(Note 2)                         | $R_{	heta JA}$                    | 480<br>205               | °C/W        |  |  |  |  |
| Junction and Storage Temperature Range                         |                                              | T <sub>J</sub> , T <sub>stg</sub> | -55 to +150              | °C          |  |  |  |  |

- 1. FR-4 @ Minimum Pad.

- FR-4 @ 1.0 x 1.0 lnch Pad.
   FR-4 @ 100 mm<sup>2</sup>, 1 oz. copper traces, still air.
   FR-4 @ 500 mm<sup>2</sup>, 1 oz. copper traces, still air.

**Table 2. THERMAL CHARACTERISTICS** 

| Characteristic                                                 |                                              | Symbol                            | Max                      | Unit        |
|----------------------------------------------------------------|----------------------------------------------|-----------------------------------|--------------------------|-------------|
| THERMAL CHARACTERISTICS (SOT-1123) (NSBC123JF3)                |                                              |                                   |                          |             |
| Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C | (Note 3)<br>(Note 4)<br>(Note 3)<br>(Note 4) | P <sub>D</sub>                    | 254<br>297<br>2.0<br>2.4 | mW<br>mW/°C |
| Thermal Resistance,<br>Junction to Ambient                     | (Note 3)<br>(Note 4)                         | $R_{	heta JA}$                    | 493<br>421               | °C/W        |
| Thermal Resistance, Junction to Lead                           | (Note 3)                                     | $R_{	heta JL}$                    | 193                      | °C/W        |
| Junction and Storage Temperature Range                         |                                              | T <sub>J</sub> , T <sub>stg</sub> | -55 to +150              | °C          |

- 1. FR-4 @ Minimum Pad.
- 2. FR-4 @ 1.0 x 1.0 Inch Pad.
- FR-4 @ 100 mm², 1 oz. copper traces, still air.
   FR-4 @ 500 mm², 1 oz. copper traces, still air.


Table 3. ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C, unless otherwise noted)

| Characteristic                                                                                           | Symbol                         | Min   | Тур   | Max   | Unit |
|----------------------------------------------------------------------------------------------------------|--------------------------------|-------|-------|-------|------|
| OFF CHARACTERISTICS                                                                                      | •                              | •     | •     | •     | •    |
| Collector–Base Cutoff Current<br>(V <sub>CB</sub> = 50 V, I <sub>E</sub> = 0)                            | I <sub>CBO</sub>               | _     | -     | 100   | nAdc |
| Collector–Emitter Cutoff Current (V <sub>CE</sub> = 50 V, I <sub>B</sub> = 0)                            | I <sub>CEO</sub>               | _     | -     | 500   | nAdc |
| Emitter–Base Cutoff Current $(V_{EB} = 6.0 \text{ V}, I_{C} = 0)$                                        | I <sub>EBO</sub>               | -     | -     | 0.2   | mAdc |
| Collector–Base Breakdown Voltage ( $I_C = 10 \mu A, I_E = 0$ )                                           | V <sub>(BR)</sub> CBO          | 50    | -     | _     | Vdc  |
| Collector–Emitter Breakdown Voltage (Note 5) (I <sub>C</sub> = 2.0 mA, I <sub>B</sub> = 0)               | V <sub>(BR)</sub> CEO          | 50    | -     | _     | Vdc  |
| ON CHARACTERISTICS                                                                                       |                                |       |       |       |      |
| DC Current Gain (Note 5)<br>(I <sub>C</sub> = 5.0 mA, V <sub>CE</sub> = 10 V)                            | h <sub>FE</sub>                | 80    | 140   | _     |      |
| Collector – Emitter Saturation Voltage (Note 5)<br>(I <sub>C</sub> = 10 mA, I <sub>B</sub> = 1.0 mA)     | V <sub>CE(sat)</sub>           | -     | -     | 0.25  | Vdc  |
| Input Voltage (off) $(V_{CE} = 5.0 \text{ V}, I_{C} = 100 \mu\text{A})$                                  | V <sub>i(off)</sub>            | _     | 0.6   | 0.5   | Vdc  |
| Input Voltage (on) $(V_{CE} = 0.3 \text{ V}, I_{C} = 5.0 \text{ mA})$                                    | V <sub>i(on)</sub>             | 1.1   | 0.8   | _     | Vdc  |
| Output Voltage (on) (V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 2.5 V, R <sub>L</sub> = 1.0 k $\Omega$ )  | V <sub>OL</sub>                | _     | -     | 0.2   | Vdc  |
| Output Voltage (off) (V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 0.5 V, R <sub>L</sub> = 1.0 k $\Omega$ ) | V <sub>OH</sub>                | 4.9   | -     | _     | Vdc  |
| Input Resistor                                                                                           | R1                             | 1.5   | 2.2   | 2.9   | kΩ   |
| Resistor Ratio                                                                                           | R <sub>1</sub> /R <sub>2</sub> | 0.038 | 0.047 | 0.056 |      |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulsed Condition: Pulse Width = 300 msec, Duty Cycle ≤ 2%.

# TYPICAL CHARACTERISTICS MUN2235, MMUN2235L, MUN5235, DTC123JE, DTC123JM3

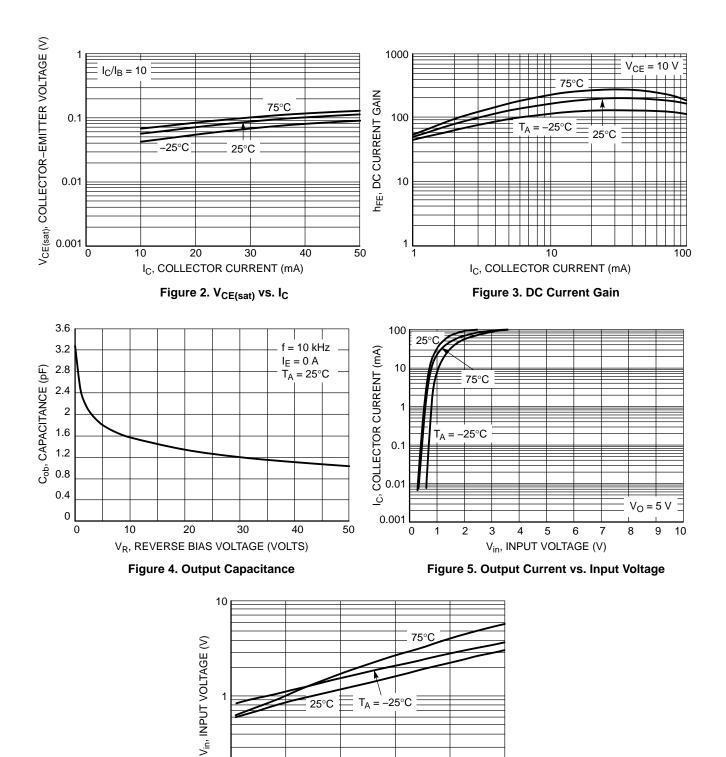

I<sub>C</sub>, COLLECTOR CURRENT (mA)

Figure 6. Input Voltage vs. Output Current

0.1

 $V_0 = 0.2 V$ 

50

40

# TYPICAL CHARACTERISTICS NSBC123JF3

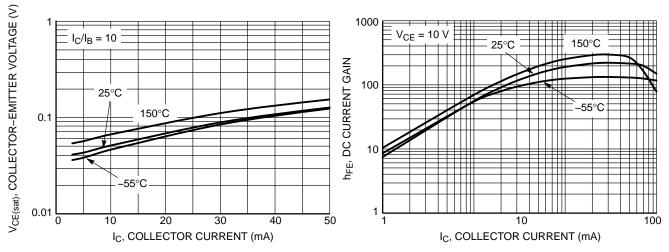


Figure 7. V<sub>CE(sat)</sub> vs. I<sub>C</sub>

Figure 8. DC Current Gain

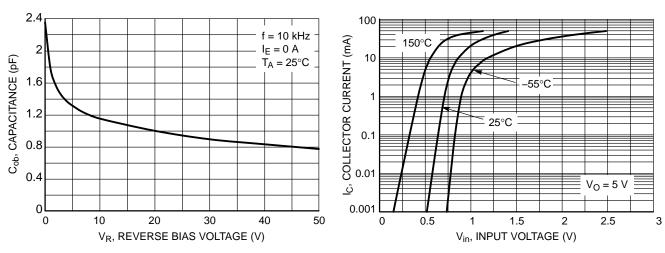


Figure 9. Output Capacitance

Figure 10. Output Current vs. Input Voltage




Figure 11. Input Voltage vs. Output Current




SOT-23 (TO-236) CASE 318-08 **ISSUE AS** 


**DATE 30 JAN 2018** 

# SCALE 4:1 D - 3X b


**TOP VIEW** 







#### **RECOMMENDED SOLDERING FOOTPRINT**



DIMENSIONS: MILLIMETERS

3. ANODE

#### NOTES:

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH.
  MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

|     | MILLIMETERS |      |      |       | INCHES |       |
|-----|-------------|------|------|-------|--------|-------|
| DIM | MIN         | NOM  | MAX  | MIN   | NOM    | MAX   |
| Α   | 0.89        | 1.00 | 1.11 | 0.035 | 0.039  | 0.044 |
| A1  | 0.01        | 0.06 | 0.10 | 0.000 | 0.002  | 0.004 |
| b   | 0.37        | 0.44 | 0.50 | 0.015 | 0.017  | 0.020 |
| С   | 0.08        | 0.14 | 0.20 | 0.003 | 0.006  | 0.008 |
| D   | 2.80        | 2.90 | 3.04 | 0.110 | 0.114  | 0.120 |
| E   | 1.20        | 1.30 | 1.40 | 0.047 | 0.051  | 0.055 |
| е   | 1.78        | 1.90 | 2.04 | 0.070 | 0.075  | 0.080 |
| L   | 0.30        | 0.43 | 0.55 | 0.012 | 0.017  | 0.022 |
| L1  | 0.35        | 0.54 | 0.69 | 0.014 | 0.021  | 0.027 |
| HE  | 2.10        | 2.40 | 2.64 | 0.083 | 0.094  | 0.104 |
| Т   | O٥          |      | 100  | O٥    |        | 10°   |

#### **GENERIC MARKING DIAGRAM\***



XXX = Specific Device Code

= Date Code

= Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

| STYLE 1 THRU 5:<br>CANCELLED              | STYLE 6:<br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR | STYLE 7:<br>PIN 1. EMITTER<br>2. BASE<br>3. COLLECTOR | STYLE 8: PIN 1. ANODE 2. NO CONNECTION 3. CATHODE | ı                |                  |
|-------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------|------------------|------------------|
| STYLE 9:                                  | STYLE 10:                                             | STYLE 11:                                             | STYLE 12:                                         | STYLE 13:        | STYLE 14:        |
| PIN 1. ANODE                              | PIN 1. DRAIN                                          | PIN 1. ANODE                                          | PIN 1. CATHODE                                    | PIN 1. SOURCE    | PIN 1. CATHODE   |
| 2. ANODE                                  | 2. SOURCE                                             | 2. CATHODE                                            | 2. CATHODE                                        | 2. DRAIN         | 2. GATE          |
| 3. CATHODE                                | 3. GATE                                               | 3. CATHODE-ANODE                                      | 3. ANODE                                          | 3. GATE          | 3. ANODE         |
| STYLE 15:                                 | STYLE 16:                                             | STYLE 17:                                             | STYLE 18:                                         | STYLE 19:        | STYLE 20:        |
| PIN 1. GATE                               | PIN 1. ANODE                                          | PIN 1. NO CONNECTION                                  | PIN 1. NO CONNECTION                              | PIN 1. CATHODE   | PIN 1. CATHODE   |
| 2. CATHODE                                | 2. CATHODE                                            | 2. ANODE                                              | 2. CATHODE                                        | 2. ANODE         | 2. ANODE         |
| 3. ANODE                                  | 3. CATHODE                                            | 3. CATHODE                                            | 3. ANODE                                          | 3. CATHODE-ANODE | 3. GATE          |
| STYLE 21:                                 | STYLE 22:                                             | STYLE 23:                                             | STYLE 24:                                         | STYLE 25:        | STYLE 26:        |
| PIN 1. GATE                               | PIN 1. RETURN                                         | PIN 1. ANODE                                          | PIN 1. GATE                                       | PIN 1. ANODE     | PIN 1. CATHODE   |
| 2. SOURCE                                 | 2. OUTPUT                                             | 2. ANODE                                              | 2. DRAIN                                          | 2. CATHODE       | 2. ANODE         |
| 3. DRAIN                                  | 3. INPUT                                              | 3. CATHODE                                            | 3. SOURCE                                         | 3. GATE          | 3. NO CONNECTION |
| STYLE 27:<br>PIN 1. CATHODE<br>2. CATHODE | STYLE 28:<br>PIN 1. ANODE<br>2. ANODE                 |                                                       |                                                   |                  |                  |

| DOCUMENT NUMBER: | 98ASB42226B     | Electronic versions are uncontrolled except when accessed directly from the Document Re<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |             |  |
|------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|
| DESCRIPTION:     | SOT-23 (TO-236) |                                                                                                                                                                            | PAGE 1 OF 1 |  |

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

3. CATHODE



SCALE 2:1

SC-59 CASE 318D-04 ISSUE H

**DATE 28 JUN 2012** 

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: MILLIMETER.

|     | MILLIMETERS |      |      | MILLIMETERS INCHES |       |       |
|-----|-------------|------|------|--------------------|-------|-------|
| DIM | MIN         | NOM  | MAX  | MIN                | MOM   | MAX   |
| Α   | 1.00        | 1.15 | 1.30 | 0.039              | 0.045 | 0.051 |
| A1  | 0.01        | 0.06 | 0.10 | 0.001              | 0.002 | 0.004 |
| b   | 0.35        | 0.43 | 0.50 | 0.014              | 0.017 | 0.020 |
| С   | 0.09        | 0.14 | 0.18 | 0.003              | 0.005 | 0.007 |
| D   | 2.70        | 2.90 | 3.10 | 0.106              | 0.114 | 0.122 |
| E   | 1.30        | 1.50 | 1.70 | 0.051              | 0.059 | 0.067 |
| е   | 1.70        | 1.90 | 2.10 | 0.067              | 0.075 | 0.083 |
| L   | 0.20        | 0.40 | 0.60 | 0.008              | 0.016 | 0.024 |
| HE  | 2.50        | 2.80 | 3.00 | 0.099              | 0.110 | 0.118 |

# **GENERIC MARKING DIAGRAM**



XXX = Specific Device Code

Μ = Date Code = Pb-Free Package\*


(\*Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.




| STYLE 4: |         | STYLE 5: |         | STYLE 6 | :             |
|----------|---------|----------|---------|---------|---------------|
| PIN 1. C | CATHODE | PIN 1.   | CATHODE | PIN 1   | ANODE         |
| 2. N     | I.C.    | 2.       | CATHODE | 2       | CATHODE       |
| 3. A     | NODE    | 3.       | ANODE   | 3       | ANODE/CATHODE |

# Ε ΗE



## **SOLDERING FOOTPRINT\***

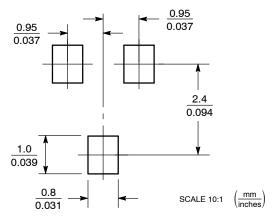

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


| DOCUMENT NUMBER: 98ASB42664B Electronic versions are uncontrolled except when accessed directly from the Document Re Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |       |   |             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---|-------------|
| DESCRIPTION:                                                                                                                                                                                         | SC-59 | • | PAGE 1 OF 1 |


ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.




SC-70 (SOT-323) CASE 419-04 ISSUE N


**DATE 11 NOV 2008** 







#### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
   CONTROLLING DIMENSION: INCH.

|     | MILLIMETERS |      |      | INCHES    |           |       |
|-----|-------------|------|------|-----------|-----------|-------|
| DIM | MIN         | NOM  | MAX  | MIN       | MOM       | MAX   |
| Α   | 0.80        | 0.90 | 1.00 | 0.032     | 0.035     | 0.040 |
| A1  | 0.00        | 0.05 | 0.10 | 0.000     | 0.002     | 0.004 |
| A2  | 0.70 REF    |      |      |           | 0.028 REF |       |
| b   | 0.30        | 0.35 | 0.40 | 0.012     | 0.014     | 0.016 |
| С   | 0.10        | 0.18 | 0.25 | 0.004     | 0.007     | 0.010 |
| D   | 1.80        | 2.10 | 2.20 | 0.071     | 0.083     | 0.087 |
| E   | 1.15        | 1.24 | 1.35 | 0.045     | 0.049     | 0.053 |
| е   | 1.20        | 1.30 | 1.40 | 0.047     | 0.051     | 0.055 |
| e1  | 0.65 BSC    |      |      | 0.026 BSC | ;         |       |
| Ĺ   | 0.20        | 0.38 | 0.56 | 0.008     | 0.015     | 0.022 |
| HE  | 2.00        | 2.10 | 2.40 | 0.079     | 0.083     | 0.095 |

## **GENERIC MARKING DIAGRAM**



XX = Specific Device Code

Μ = Date Code

= Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

| STYLE 1:<br>CANCELLED                 | STYLE 2:<br>PIN 1. ANODE<br>2. N.C.<br>3. CATHODE | STYLE 3:<br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR | STYLE 4:<br>PIN 1. CATHODE<br>2. CATHODE<br>3. ANODE | STYLE 5:<br>PIN 1. ANODE<br>2. ANODE<br>3. CATHODE |                                           |
|---------------------------------------|---------------------------------------------------|-------------------------------------------------------|------------------------------------------------------|----------------------------------------------------|-------------------------------------------|
| STYLE 6:<br>PIN 1. EMITTER<br>2. BASE | STYLE 7:<br>PIN 1. BASE<br>2. EMITTER             | STYLE 8:<br>PIN 1. GATE<br>2. SOURCE                  | STYLE 9:<br>PIN 1. ANODE<br>2. CATHODE               | STYLE 10:<br>PIN 1. CATHODE<br>2. ANODE            | STYLE 11:<br>PIN 1. CATHODE<br>2. CATHODE |
| 3. COLLECTOR                          | 3. COLLECTOR                                      | 3. DRAIN                                              | 3. CATHODE-ANODE                                     | 3. ANODE-CATHODE                                   | 3. CATHODE                                |

| DOCUMENT NUMBER: | 98ASB42819B     | Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |             |  |
|------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|
| DESCRIPTION:     | SC-70 (SOT-323) |                                                                                                                                                                                | PAGE 1 OF 1 |  |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.


# **MECHANICAL CASE OUTLINE**






SC-75/SOT-416 CASE 463-01 **ISSUE G** 

**DATE 07 AUG 2015** 

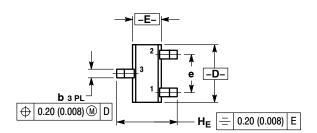



STYLE 1: PIN 1. BASE 2. EMITTER

3. COLLECTOR

STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE STYLE 5: PIN 1. GATE 2. SOURCE 3. DRAIN

STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE

STYLE 3: PIN 1. ANODE 2. ANODE 3. CATHODE

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: MILLIMETER.

| - |     | MILLIMETERS |         |      |       | INCHES   | ;     |
|---|-----|-------------|---------|------|-------|----------|-------|
| L | DIM | MIN         | NOM     | MAX  | MIN   | NOM      | MAX   |
|   | Α   | 0.70        | 0.80    | 0.90 | 0.027 | 0.031    | 0.035 |
| L | A1  | 0.00        | 0.05    | 0.10 | 0.000 | 0.002    | 0.004 |
|   | b   | 0.15        | 0.20    | 0.30 | 0.006 | 0.008    | 0.012 |
|   | С   | 0.10        | 0.15    | 0.25 | 0.004 | 0.006    | 0.010 |
|   | D   | 1.55        | 1.60    | 1.65 | 0.061 | 0.063    | 0.065 |
|   | Е   | 0.70        | 0.80    | 0.90 | 0.027 | 0.031    | 0.035 |
|   | е   | 1           | .00 BSC | )    |       | 0.04 BSC | )     |
|   | L   | 0.10        | 0.15    | 0.20 | 0.004 | 0.006    | 0.008 |
|   | HE  | 1.50        | 1.60    | 1.70 | 0.060 | 0.063    | 0.067 |

## **GENERIC MARKING DIAGRAM\***




XX= Specific Device Code

Μ = Date Code

= Pb-Free Package

### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

| DOCUMENT NUMBER: | 98ASB15184C   | Electronic versions are uncontrolled except when accessed directly from the Document Reposit Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |             |  |
|------------------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|
| DESCRIPTION:     | SC-75/SOT-416 |                                                                                                                                                                              | PAGE 1 OF 1 |  |

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.








SOT-1123 CASE 524AA ISSUE C

**DATE 29 NOV 2011** 


#### SCALE 8:1





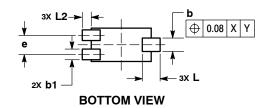

#### **SOLDERING FOOTPRINT\***



STVI F 2

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### NOTES:

- NOTES:

  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.

  2. CONTROLLING DIMENSION: MILLIMETERS.
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE
- MINIMUM THICKNESS OF BASE MATERIAL.
  DIMENSIONS D AND E DO NOT INCLUDE MOLD
  FLASH, PROTRUSIONS, OR GATE BURRS.

|     | MILLIMETERS |      |  |  |
|-----|-------------|------|--|--|
| DIM | MIN MAX     |      |  |  |
| Α   | 0.34        | 0.40 |  |  |
| b   | 0.15        | 0.28 |  |  |
| b1  | 0.10        | 0.20 |  |  |
| c   | 0.07        | 0.17 |  |  |
| D   | 0.75        | 0.85 |  |  |
| Е   | 0.55        | 0.65 |  |  |
| Φ   | 0.35        | 0.40 |  |  |
| HE  | 0.95        | 1.05 |  |  |
| L   | 0.185 REF   |      |  |  |
| L2  | 0.05        | 0.15 |  |  |

#### **GENERIC MARKING DIAGRAM\***



= Specific Device Code Μ = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking.

Pb-Free indicator, "G" or microdot " ■", may or may not be present.

| PIN 1. BASE                 | PIN 1. ANODE              | PIN 1. ANODE              | PIN 1. CATHODE            | PIN 1. GATE              |
|-----------------------------|---------------------------|---------------------------|---------------------------|--------------------------|
| <ol><li>EMITTER</li></ol>   | 2. N/C                    | 2. ANODE                  | <ol><li>CATHODE</li></ol> | <ol><li>SOURCE</li></ol> |
| <ol><li>COLLECTOR</li></ol> | <ol><li>CATHODE</li></ol> | <ol><li>CATHODE</li></ol> | <ol><li>ANODE</li></ol>   | <ol><li>DRAIN</li></ol>  |
|                             |                           |                           |                           |                          |

STVLE 3

| DOCUMENT NUMBER: | 98AON23134D                           | Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |             |  |
|------------------|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|
| DESCRIPTION:     | SOT-1123, 3-LEAD, 1.0X0.6X0.37, 0.35P |                                                                                                                                                                                | PAGE 1 OF 1 |  |

STVLE 5

STVLE 4:

ON Semiconductor and unare trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

STVI F 1:



SOT-723 CASE 631AA-01 ISSUE D

**DATE 10 AUG 2009** 

#### NOTES:

- NOTES.

  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.

  2. CONTROLLING DIMENSION: MILLIMETERS.

  3. MAXIMUM LEAD THICKNESS INCLUDES LEAD
- FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

|     | MILLIMETERS |          |      |  |
|-----|-------------|----------|------|--|
| DIM | MIN         | NOM      | MAX  |  |
| Α   | 0.45        | 0.50     | 0.55 |  |
| b   | 0.15        | 0.21     | 0.27 |  |
| b1  | 0.25        | 0.31     | 0.37 |  |
| С   | 0.07        | 0.12     | 0.17 |  |
| D   | 1.15        | 1.20     | 1.25 |  |
| E   | 0.75        | 0.80     | 0.85 |  |
| е   |             | 0.40 BS0 |      |  |
| ΗE  | 1.15        | 1.20     | 1.25 |  |
| L   | 0.29 REF    |          |      |  |
| L2  | 0.15        | 0.20     | 0.25 |  |


## **GENERIC MARKING DIAGRAM\***




= Specific Device Code XX Μ = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G", may or not be present.

# -X-2X b ⊕ 0.08 X Y **TOP VIEW**






STYLE 1: PIN 1. BASE 2. EMITTER 3. COLLECTOR STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE STYLE 3: PIN 1. ANODE 2. ANODE 3. CATHODE

STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE STYLE 5: PIN 1. GATE 2. SOURCE 3. DRAIN

**RECOMMENDED SOLDERING FOOTPRINT\*** 



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

| DOCUMENT NUMBER: | 98AON12989D | Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |             |  |
|------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|
| DESCRIPTION:     | SOT-723     |                                                                                                                                                                                | PAGE 1 OF 1 |  |

ON Semiconductor and unare trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability. arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

**TECHNICAL SUPPORT** North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative