

Wire Wound Chip Balun Transformer - BW Series



Operating Temp. : -40°C ~+ 85°C

FEATURES

- Winding structure and small size
- Surface mount type
- Low insertion loss at frequency range
- Excellent solderability

APPLICATIONS

- Balanced unbalanced transformation between antenna and cable (TV tuner)

PRODUCT IDENTIFICATION

B **W** **21** **S** **75** **11** **A01** **T** **F**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

①

Type	
B	Chip Balun Transformer

②

Structure	
W	Winding Type

③

External Dimensions (L×W) (mm)	
21	2.0×1.2
43	4.5×3.2

④

Type of Transformer	
S	Standard
C	Internal Code

⑤

Port Impedance	
75	75Ω
50	50Ω

⑥

Impedance Ratio	
11	1:1 One to One

⑦

Characteristic Code	
A01	
B02	
C01	
D01	
E01	

⑧


Packing	
T	Tape Carrier Package

⑨

Hazardous Substance Free Products	
F	



SHAPE AND DIMENSIONS

BW21S Series

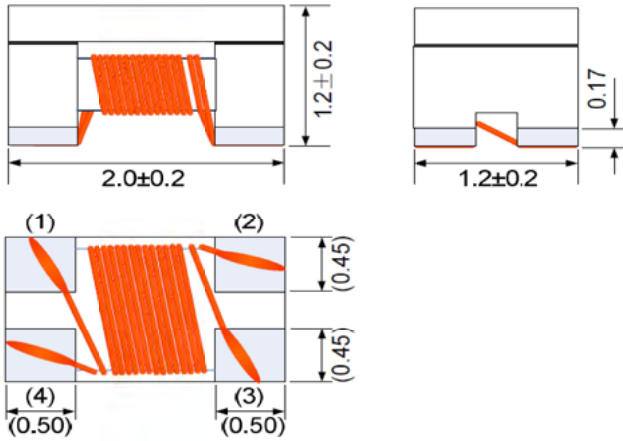


Land Pattern

Unit: mm

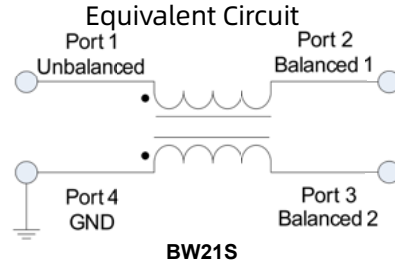



BW21C Series

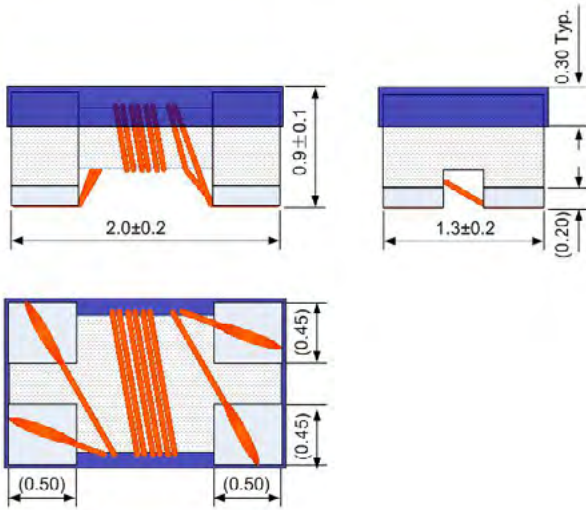


Land Pattern

Unit: mm

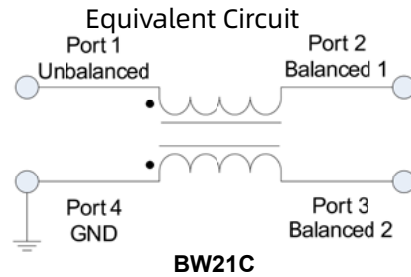

BW43S Series

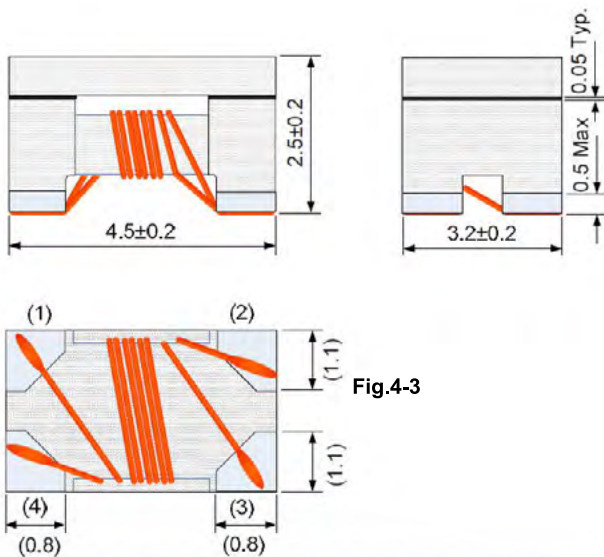

Land Pattern

Unit: mm

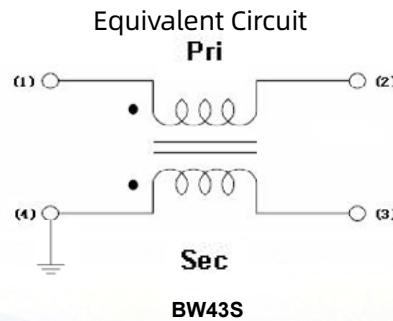



Fig.4-3

SPECIFICATIONS

BW21S TYPE

Part Number	Freq. Range	Port Impedance	Insertion Loss at Freq. Range	CMRR at Freq. Range(Min.)	Rated Power
Units	MHz	Ω	dB	dB	dBm
BW21S7511A01TF	45~870	75/75	1.0	20	27
BW21S5011A01TF	45~870	50/50	1.2	20	27
BW21S7511B02TF	50~1200	75/75	1.2	20	27
BW21S7511C01TF	1000~1500	75/75	1.4	20	27
BW21S7511D01TF	950~2150	75/75	1.5	20	27
BW21S7511E01TF	400~1800	75/75	2.0	10	27

BW21C TYPE

Part Number	Freq. Range	Port Impedance	Inductance	Insertion Loss	Return Loss	DC Resistance	Rated Current	CMRR	Insulation Resistance
Units	MHz	Ω	μ H	dB	dB	Ω	mA	dB	M Ω
BW21C2511A01TF	13.56	25/25	1.0 Min.	1.0 Max.	13 Typ.	0.75 Max.	220 Min.	47 Min.	10 Min.

BW43S TYPE


Part Number	Freq. Range	Port Impedance	Inductance @50MHz	Insertion Loss	DC Resistance	Rated Current	Rated Voltage	Insulation Resistance (M Ω)
Units	MHz	Ω	μ H	dB	Ω	mA	VDC	dB
BW43S5011C01TF	4~200	50/50	1.25 Typ.	2.52 Typ.	0.40 Max.	540 Max.	50	10 Min.
BW43S5011E01TF	48~645	50/50	1.00 Typ.	6.66 Typ.	0.15 Max.	960 Max.	50	10 Min.

※Products with other electrical characteristics can be provided upon customer's request. Please contact your local sales.


TYPICAL ELECTRICAL CHARACTERISTICS

BW21S7511A01TF

Insertion Loss Characteristics

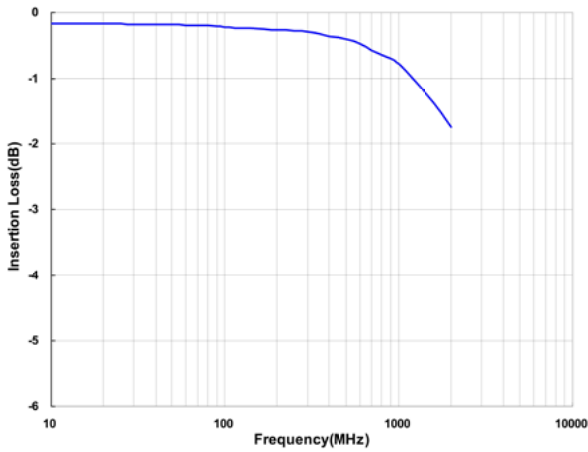


CMRR Characteristics

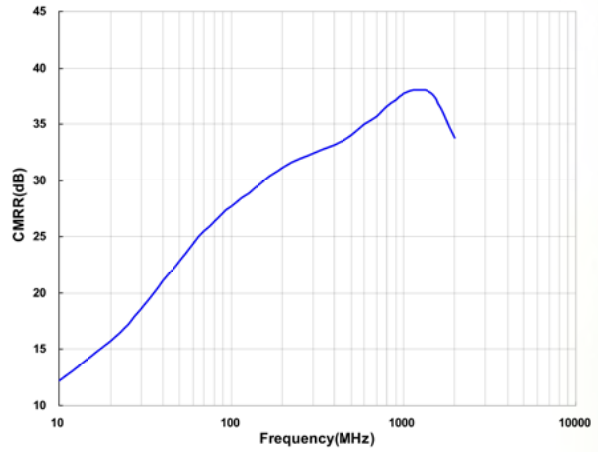


BW21S5011A01TF

Insertion Loss Characteristics

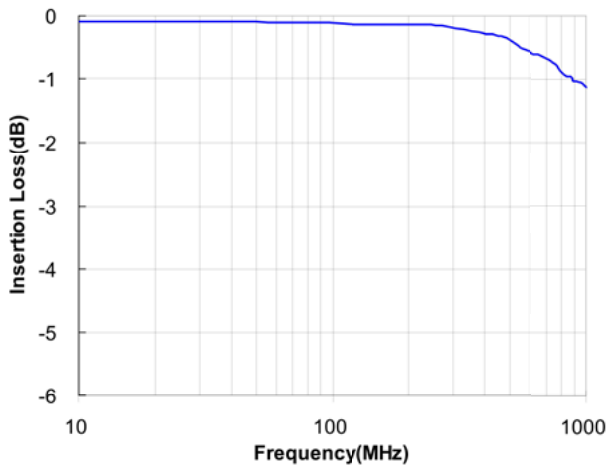


CMRR Characteristics

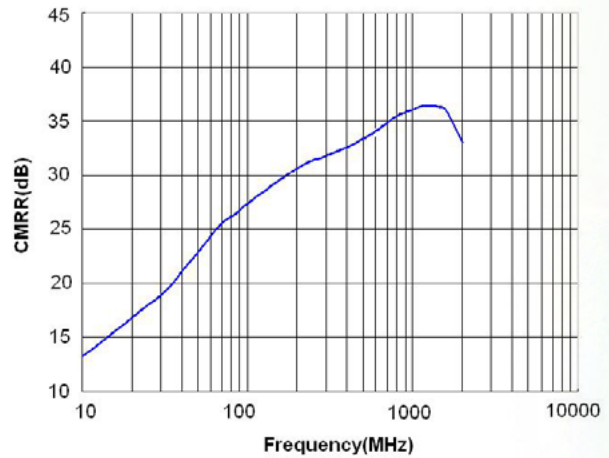


BW21S7511B02TF

Insertion Loss Characteristics

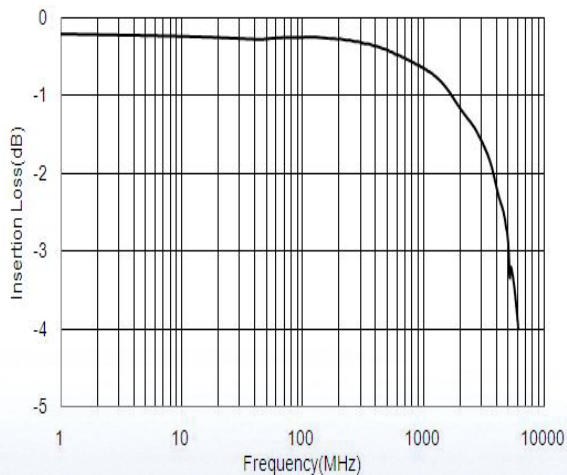


CMRR Characteristics

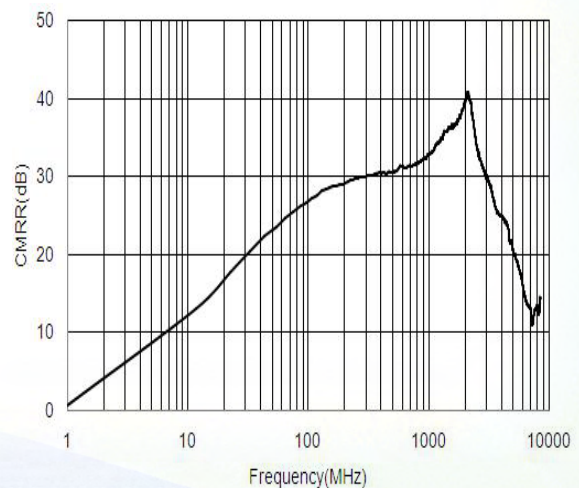


TYPICAL ELECTRICAL CHARACTERISTICS

BW21S7511C01TF

Insertion Loss Characteristics

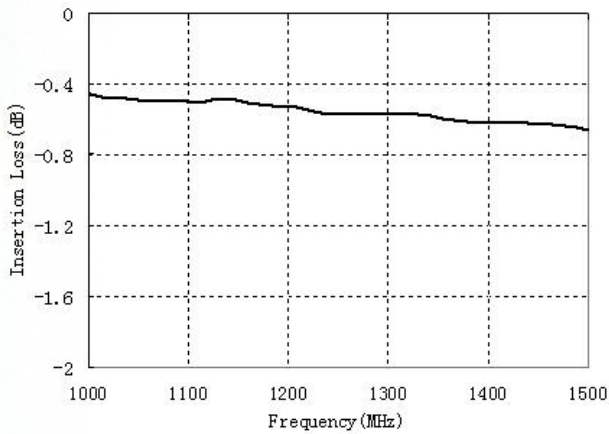


CMRR Characteristics

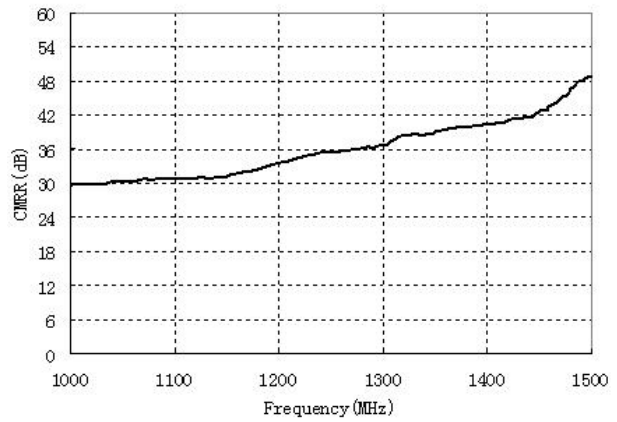


BW21S7511D01TF

Insertion Loss Characteristics

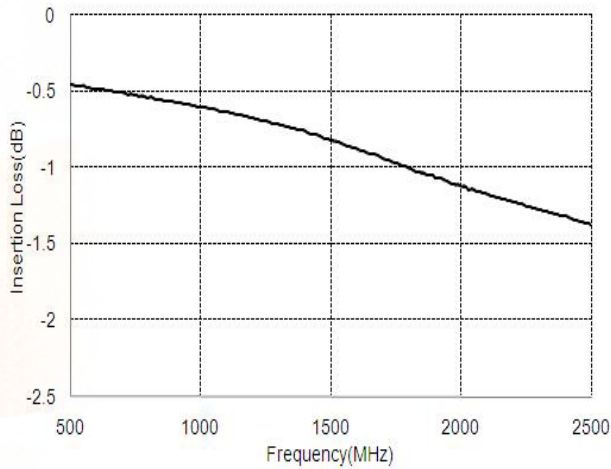


CMRR Characteristics

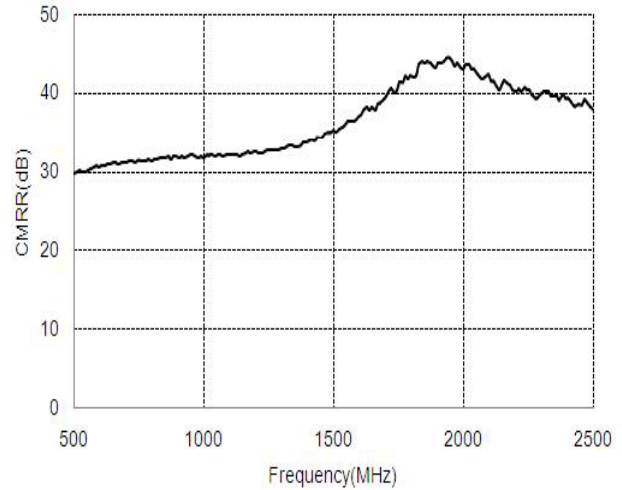


BW21S7511E01TF

Insertion Loss Characteristics

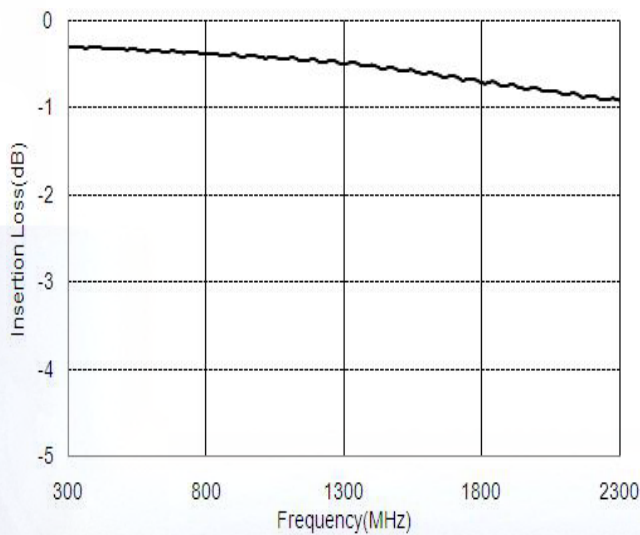


CMRR Characteristics

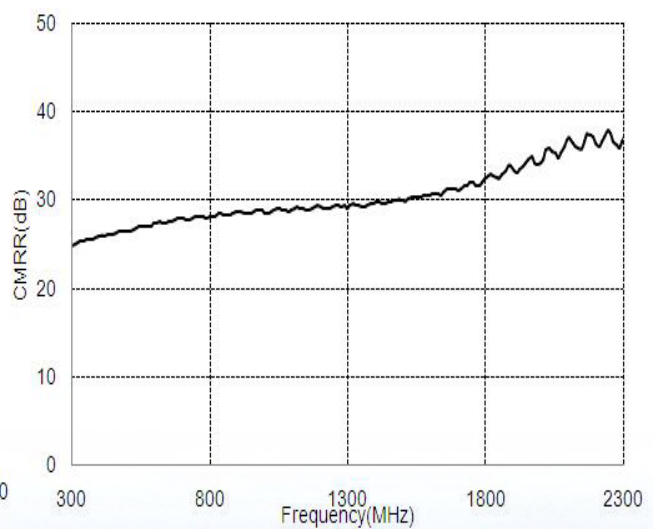


TYPICAL ELECTRICAL CHARACTERISTICS

BW21C2511A01TF

Insertion Loss Characteristics

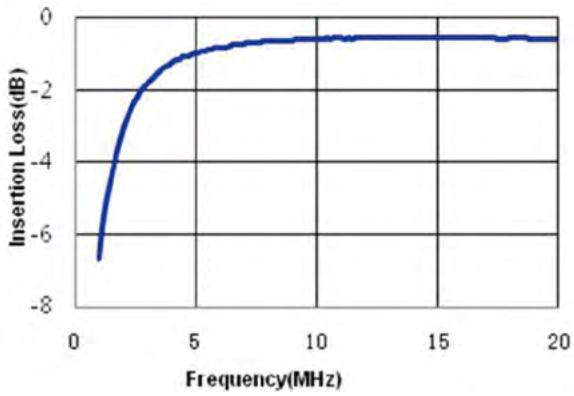


CMRR Characteristics

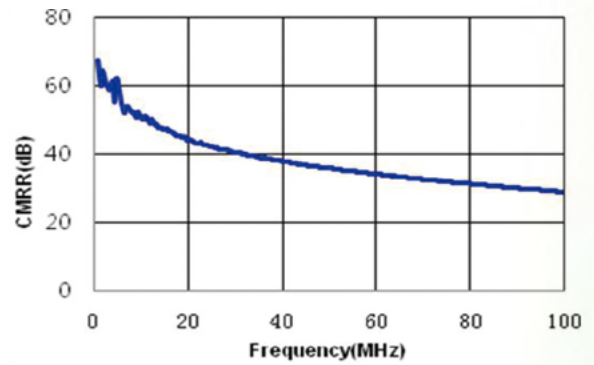


BW21C2511A01TF

Return Loss vs. Frequency

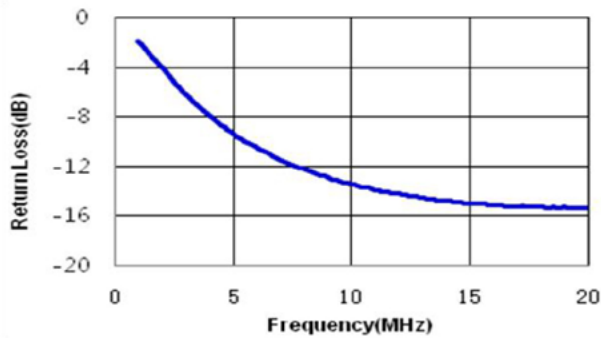

I_{rms} vs. ΔT

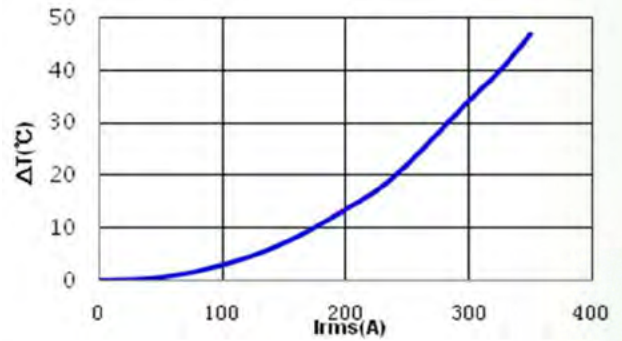

BW43S5011C01TF/BW43S5011E01TF

Insertion Loss Characteristics

