

#### SUPER FAST GLASS PASSIVATED RECTIFIER

SF101G THRU SF108G	VOLTAGE RANGE	50 to 600 Volts
	CURRENT	10.0 Ampere
Features		RoHS COMPLIANT
<ul> <li>Super fast switching speed</li> <li>Glass passivated chip junction</li> <li>Low power loss, high efficiency</li> <li>Low leakage</li> <li>High Surge Capacity</li> </ul>	.220(5 .197(5 DIA.	.0)
<ul> <li>High temperature soldering guaranteed 260°C/10 seconds, 0.375"(9.5mm) lead length</li> </ul>		<u>.375(9.5)</u> .285(7.2)
<ul> <li>Mechanical Data</li> <li>Case: Transfer molded plastic</li> </ul>		
Epoxy: UL94V-0 rate flame retardant		0.945(24.0)

- Epoxy: UL94V-0 rate flame retardant .
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.042ounce, 1.19 gram

### Maximum Ratings and Electrical Characteristics

- Ratings at 25 °C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

TYPE NUMBER		SYMBO LS	SF 101G	SF 102G	SF 103G	SF 104G	SF 105G	SF 106G	SF 108G	UNIT
Maximum Repetitive Peak Reverse Voltage		VRRM	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage		VRMS	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage		V <sub>DC</sub>	50	100	100	200	300	400	600	Volts
Maximum Average Forward Rectified Current 0.375"(9.5mm) lead length at T_A=100 $^\circ\!\!\mathrm{C}$		I <sub>(AV)</sub>	10					Amps		
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		IFSM	250						Amps	
Maximum Instantaneous Forward Voltage at 10A		VF	0.95 1.25 1.70		1.70	Volts				
Maximum DC Reverse Current at rated DC $T_A = 25^{\circ}C$		I <sub>R</sub>	5.0					μΑ		
blocking Voltage at $T_A = 125^{\circ}C$		I IK	50							
Maximum Reverse Recovery Time (NOTE 1)		T <sub>RR</sub>	35						nS	
Typical Junction Capacitance (NOTE 2)		CJ	85 40				pF			
Typical Thermal Resistance (NOTE 3)		R <sub>0JA</sub>	25					℃/W		
Operating Junction Temperature Range		TJ	(-55 to +150)					°C		
Storage Temperature Range		T <sub>STG</sub>	(-55 to +150)					°C		

#### Notes:

1. Reverse Recovery Test Conditions:If=0.5A,Ir=1.0A,Irr=0.25A.

2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

3. Thermal Resistance from Junction to Ambient with 0.375" (9.5mm) lead length, PCB mounted.

Dimensions in inches and (millimeters)

MIN.

V

.052(1.3)

.043(1.1) DIA.




## SF101G THRU SF108G

#### VOLTAGE RANGE CURRENT


50 to 600 Volts

10.0 Ampere

# Ratings and Characteristic Curves (TA=25°C unless otherwise noted)

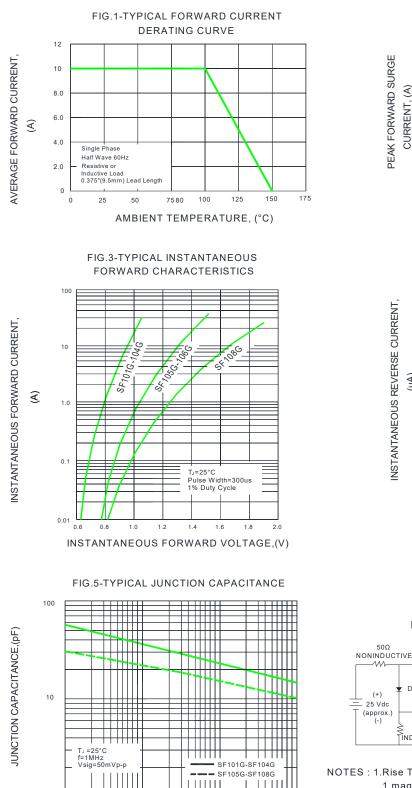


100




NUMBER OF CYCLES AT 60 Hz

FIG.4-TYPICAL REVERSE CHARACTERISTICS



F1G.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

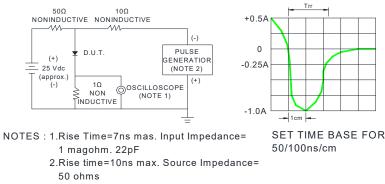

1.0

0.1

1.0

10


REVERSE VOLTAGE,(V)



## SF101G THRU SF108G

VOLTAGE RANGE CURRENT 50 to 600 Volts 10.0 Ampere

# Axial Lead Taping Specifications for Rectifiers

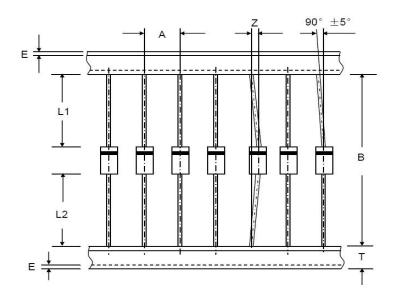

	Component Pitch A	Inner Tape Pitch B	Cumulative	
Component Outline	±0.5mm	+0.5mm -0.4mm	Tolerance	
DO-201AD(DO-27)	10.0mm	52.4mm	2.0mm/20pitch	


Item	Symbol	Specifications(mm)	Specifications(inch)
Component alignment	Z	1.2 max	0.048 max
Tape width	Т	6.0±0.4	0.236±0.016
Exposed adhesive	E	0.8 max	0.032 max
Body eccentricity	IL1-L2I	1.0 max	0.040 max



#### SUPER FAST GLASS PASSIVATED RECTIFIER

	VOLTAGE RANGE	50 to 600 Volts
RU SF108G	CURRENT	10.0 Ampere

# **Reflow Profile**

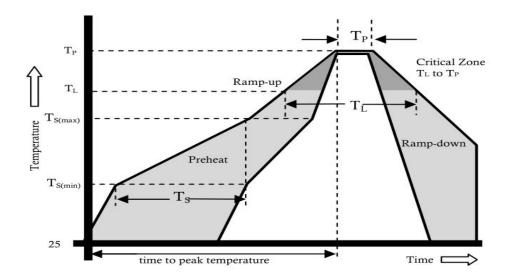

Reflow Condition		Pb-Free Assembly	
	Temperature Min.	+150°C	
Pre Heat	Temperature Max.	+200°C	
	Time(Min to Max)	60-180 secs.	
Average ram	o up rate(Liquidus Temp(TL) to peak)	3°C/sec. Max.	
TS(max) to TL - Ramp-up Rate		3°C/sec. Max.	
Deflection	Temperature (TL)(Liquidus)	+217°C	
Reflow	Temperature (TL)	60-150 secs.	
Peak Temp (TP)		+(260+0/-5 )°C	
Time within 5°C of actual Peak Temp (TP)		25 secs.	
Ramp-down Rate		6°C/sec. Max.	
Time 25°C to peak Temp (TP)		8 min. Max.	
Do not exceed		+260°C	



## **SF1**(

01G THRU SF108G	VOLTAGE RANGE	50 to 600 Volts
UIG IARU SF 106G	CURRENT	10.0 Ampere

### Disclaimer

The information presented in this document is for reference only. Chongqing changjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Changjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.czlangjie.com , or consult your nearest Langjie's sales office for further assistance.