PESD5V0U1UA; PESD5V0U1UB; PESD5V0U1UL

Ultra low capacitance unidirectional ESD protection diodes

Rev. 01 — 30 October 2008 Product data sheet

1. Product profile

1.1 General description

Ultra low capacitance unidirectional ElectroStatic Discharge (ESD) protection diodes in small Surface-Mounted Device (SMD) plastic packages designed to protect one signal line from the damage caused by ESD and other transients.

Table 1. Product overview

Type number	Package Nexperia JEITA		Package configuration
PESD5V0U1UA	SOD323	SC-76	very small
PESD5V0U1UB	SOD523	SC-79	ultra small and flat lead
PESD5V0U1UL	SOD882	-	leadless ultra small

1.2 Features

- Unidirectional ESD protection of one line ESD protection up to 9 kV
- Ultra low diode capacitance: C_d = 2 pF IEC 61000-4-2; level 4 (ESD)
- Very low leakage current: I_{RM} = 1 nA
- ESD protection up to 9 kV
- AEC-Q101 qualified

1.3 Applications

- USB interfaces
- 10/100/1000 Mbit/s Ethernet
- FireWire
- High-speed data lines
- Subscriber Identity Module (SIM) card protection
- Cellular handsets and accessories
- Portable electronics
- Communication systems
- Computers and peripherals
- Audio and video equipment

1.4 Quick reference data

Table 2. Quick reference data

 T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V_{RWM}	reverse standoff voltage		-	-	5	V



Ultra low capacitance unidirectional ESD protection diodes

Table 2. Quick reference data ...continued

 T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
C_{d}	diode capacitance	f = 1 MHz				
		$V_R = 0 V$	-	2	2.6	pF
		$V_R = 5 V$	-	1.7	2.3	pF

2. Pinning information

Table 3. Pinning

Table 5.	i iiiiiiig		
Pin	Description	Simplified outline	Graphic symbol
PESD5V0	0U1UA; PESD5V0U1UB		
1	cathode	[1]	
2	anode	001aab540	1 2 006aaa152
PESD5V0	0U1UL		
1	cathode	<u>[1]</u>	
2	anode	Transparent top view	1 2 006aaa152

^[1] The marking bar indicates the cathode.

3. Ordering information

Table 4. Ordering information

Type number	Package					
	Name	Description	Version			
PESD5V0U1UA	SC-76	plastic surface-mounted package; 2 leads	SOD323			
PESD5V0U1UB	SC-79	plastic surface-mounted package; 2 leads	SOD523			
PESD5V0U1UL	-	leadless ultra small plastic package; 2 terminals; body 1.0 \times 0.6 \times 0.5 mm	SOD882			

4. Marking

Table 5. Marking codes

Type number	Marking code
PESD5V0U1UA	C7
PESD5V0U1UB	LA
PESD5V0U1UL	L1

5. Limiting values

Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
Tj	junction temperature		-	150	°C
T _{amb}	ambient temperature		– 55	+150	°C
T _{stg}	storage temperature		-65	+150	°C

Table 7. ESD maximum ratings


 T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions		Min	Max	Unit
V _{ESD}	electrostatic discharge voltage	IEC 61000-4-2 (contact discharge)	<u>[1]</u>	-	9	kV
		MIL-STD-883 (human body model)		-	10	kV

^[1] Device stressed with ten non-repetitive ESD pulses.

Table 8. ESD standards compliance

Standard	Conditions
IEC 61000-4-2; level 4 (ESD)	> 8 kV (contact)
MIL-STD-883; class 3 (human body model)	> 4 kV

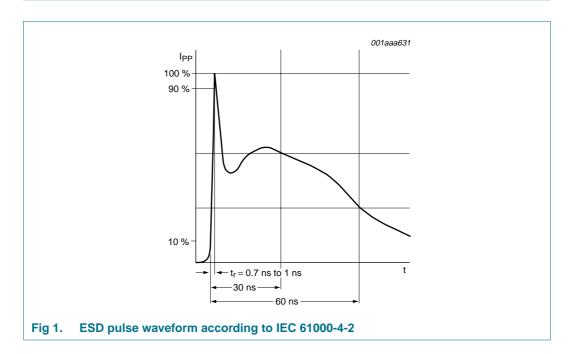

6. Characteristics

Table 9. Characteristics

 $T_{amb} = 25 \,^{\circ}C$ unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V_{RWM}	reverse standoff voltage		-	-	5	V
I_{RM}	reverse leakage current	$V_{RWM} = 5 V$	-	1	100	nA
V_{BR}	breakdown voltage	$I_R = 5 \text{ mA}$	5.8	6.8	8.8	V
C _d	diode capacitance	f = 1 MHz				
		$V_R = 0 V$	-	2	2.6	pF
		$V_R = 5 V$	-	1.7	2.3	pF
r _{dif}	differential resistance	$I_R = 1 \text{ mA}$	-	-	100	Ω




Fig 2. Diode capacitance as a function of reverse voltage; typical values





Fig 3. V-I characteristics for a unidirectional ESD protection diode


4 of 12

Ultra low capacitance unidirectional ESD protection diodes

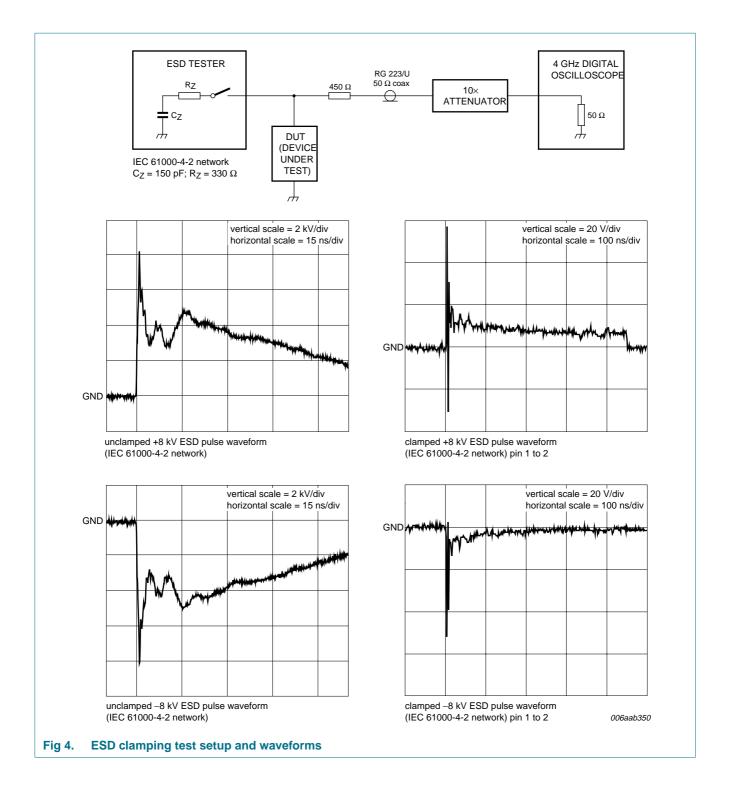

7. Application information

The PESD5V0U1Ux series is designed for the protection of one unidirectional data or signal line from the damage caused by ESD. The devices may be used on lines where the signal polarities are either positive or negative with respect to ground.

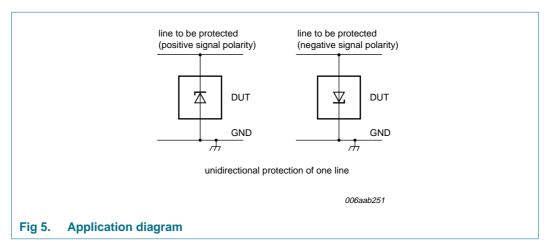

Circuit board layout and protection device placement

Circuit board layout is critical for the suppression of ESD and Electrical Fast Transient (EFT). The following guidelines are recommended:


- 1. Place the device as close to the input terminal or connector as possible.
- 2. The path length between the device and the protected line should be minimized.
- 3. Keep parallel signal paths to a minimum.
- 4. Avoid running protected conductors in parallel with unprotected conductors.
- 5. Minimize all Printed-Circuit Board (PCB) conductive loops including power and ground loops.
- 6. Minimize the length of the transient return path to ground.
- 7. Avoid using shared transient return paths to a common ground point.
- 8. Ground planes should be used whenever possible. For multilayer PCBs, use ground vias.

8. Test information

8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q101 - Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.

9. Package outline

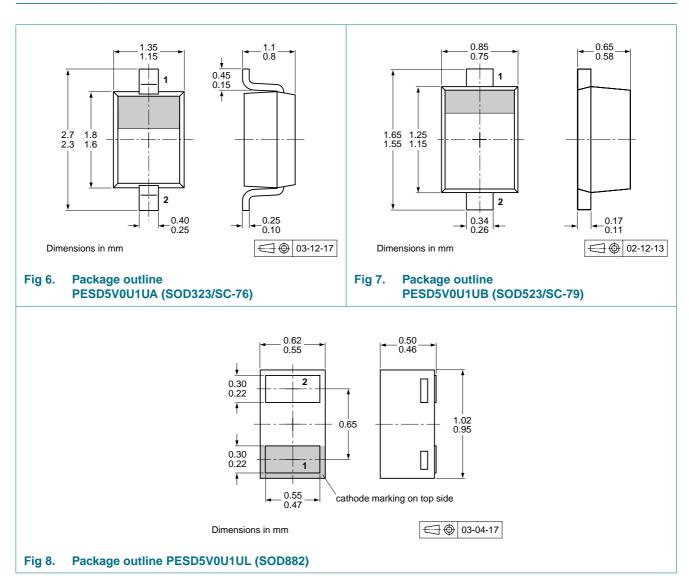

10. Packing information


Table 10. Packing methods

The indicated -xxx are the last three digits of the 12NC ordering code.[1]


Type number Package Description		Description	Packin	g quantity	
			3000	8000	10000
PESD5V0U1UA	SOD323	4 mm pitch, 8 mm tape and reel	-115	-	-
PESD5V0U1UB SOD523		2 mm pitch, 8 mm tape and reel	-	-	-
		4 mm pitch, 8 mm tape and reel	-115	-	-
PESD5V0U1UL	SOD882	2 mm pitch, 8 mm tape and reel	-	-	-315

[1] For further information and the availability of packing methods, see http://www.nexperia.com.

11. Soldering

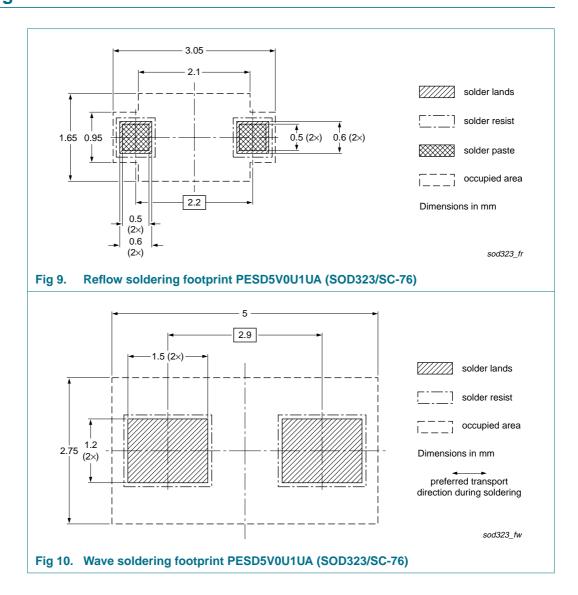

Ultra low capacitance unidirectional ESD protection diodes

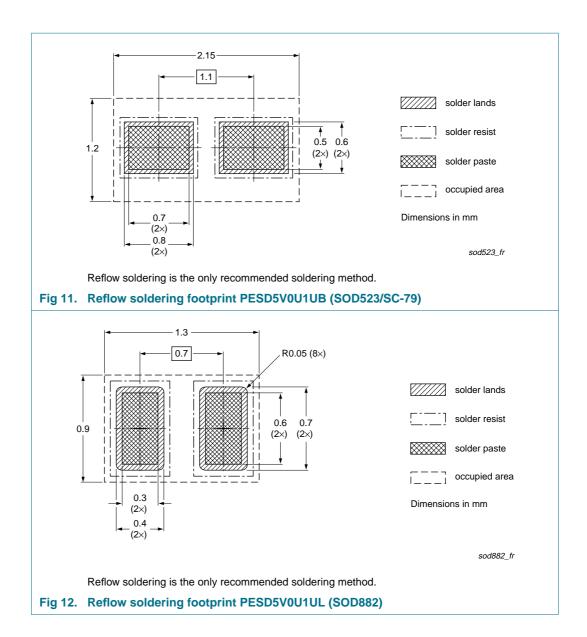

Ultra low capacitance unidirectional ESD protection diodes

12. Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
PESD5V0U1UA_UB_UL	20081030	Product data sheet	-	-

Ultra low capacitance unidirectional ESD protection diodes

13. Legal information

13.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

13.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

13.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia accepts no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by Nexperia. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

ESD protection devices — These products are only intended for protection against ElectroStatic Discharge (ESD) pulses and are not intended for any other usage including, without limitation, voltage regulation applications. Nexperia accepts no liability for use in such applications and therefore such use is at the customer's own risk.

13.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Ultra low capacitance unidirectional ESD protection diodes

14. Contents

1	Product profile
1.1	General description
1.2	Features
1.3	Applications
1.4	Quick reference data
2	Pinning information 2
3	Ordering information
4	Marking 2
5	Limiting values 3
6	Characteristics 4
7	Application information 6
8	Test information 6
8.1	Quality information 6
9	Package outline
10	Packing information 7
11	Soldering 8
12	Revision history
13	Legal information
13.1	Data sheet status
13.2	Definitions
13.3	Disclaimers
13.4	Trademarks11
14	Contents

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nexperia:

 $\frac{\text{PESD5V0U1UA,115}}{\text{LYL}} \ \frac{\text{PESD5V0U1UB,115}}{\text{PESD5V0U1UL,315}} \ \frac{\text{PESD5V0U1BBYL}}{\text{PESD5V0U1BBYL}} \ \frac{\text{PESD1NFC-SFYL}}{\text{PESD1NFC-SFYL}} \ \frac{\text{PESD$